INCH-POUND

A-A-50037B
December 8, 1993
SUPERSEDING
A-A-50037A
September 26, 1986

COMMERCIAL ITEM DESCRIPTION

GRIDDLES, SELF HEATING, GAS, COUNTER OR STAND MOUNTED

The General Services Administration has authorized the use of this Commercial Item Description in preference to all sizes contained in MIL-G-2239.

1. ABSTRACT

1.1 Abstract. This commercial item description covers stand or counter mounted, self heating, gas griddles in the following types and sizes:

Type I - Counter mounted
Size 1 - 18 inches deep by 36 inches wide cooking surface
Size 2 - 24 inches deep by 36 inches wide cooking surface

Type II - Stand mounted
Size 1 - 24 inches deep by 36 inches wide cooking surface
Size 2 - 24 inches deep by 72 inches wide cooking surface

1.2 CID based part identification number (PIN). A document based PIN to identify type and size of items is included in section 5. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor except as information on "Government unique" data nameplates (see 5.4).

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: SATNC-WEE, Natick, MA 01760-5018.

AMSC N/A FSC 7310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The body and splash guards shall be made from 300 or 400 series stainless steel. The rear griddle body panel shall be made from stainless steel or aluminized steel. The height of the splash guard shall be a minimum of 3 inches for the type I griddles and 4 inches for the type II griddles. The splash guards shall be continuously welded to the griddle plate. The griddle surface top shall be equipped with a full width grease trough and equipped with grease receptacles. The type II, size 2 griddle shall have two receptacles, and all other griddles shall have only one receptacle. Type II griddles shall be equipped with stainless steel adjustable legs.

2.2 Stand, type II griddle. The stand shall be of the open frame type design, and shall be entirely fabricated from stainless steel, including the undershelf. The stand shall be equipped with NSF International approved adjustable feet. Means shall be provided to firmly secure the griddle to the stand and allow for easy removal of the griddle. The stand shall be capable of supporting the griddle and a uniformly distributed load of 200 pounds placed on the cooking surface, and dragged lengthwise by the top of the stand a distance of ten feet without damage or deformity to the griddle or stand. The stand shall be constructed to allow the griddles to be banked flush together in battery alignment.

2.3 Dimensions. The griddle dimensions shall be within the dimensional limits specified in table I.

TABLE I. Griddle dimensions

	Type I		Type II	
	Size 1	Size 2	Size 1	Size 2
Griddle cooking surface area (square inches, minimum)	576	760	760	1650
Dimensions, overall (inches)				
Depth	21 to 29	30 to 34	30 to 34	30 to 34
Width	32 to 37	34 to 37	34 to 37	70 to 73
Height	9 to 16 1/	9 to 16 1/	34 to 36 2/	34 to 36 2/
Thickness, griddle top	1/2 (min)	3/4 (min)	3/4 (min)	3/4 (min)

1/ Counter top to cooking surface.

2/ Floor to cooking surface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

2.4 Thermostats. The type I, sizes 1 and 2, and type II, size 1 griddles shall be equipped with a minimum of two thermostats, and the type II, size 2, griddle shall be furnished with a minimum of three thermostats. A temperature dial indicating knob with temperature graduations not to exceed 25°F in the operating temperature range of 200°F to 450°F shall be provided for each thermostat control.

2.5 Fuel system. The griddles shall be designed to operate on natural gas and on liquid petroleum gas (LPG) when converted by a separately furnished kit. The orifice hoods or spuds installed for natural gas shall be unpainted brass. Black color-coded orifice hoods or spuds to convert the unit to operate on LPG shall be furnished. A conversion kit and complete instructions to operate on LPG shall be furnished with each griddle. The type I, size 1 griddle shall have a minimum of two burners and have a total rating of 60,000 BTU/hr. minimum. The type I, size 2, and type II, size 1 griddles shall have a minimum of three burners, and the type II, size 2, shall have a minimum of six burners with each burner having a rating of 30,000 BTU/hr. The griddle shall be equipped with a continuous pilot, a pressure regulator, and an automatic ignition system. An American Gas Association (AGA) approved quick disconnect (socket and plug) conforming to ANSI Z21.41, and a 5 foot minimum flexible metal connector conforming to ANSI Z21.45 and consisting of a male pipe thread fitting on one end and a union with female thread on the opposite end shall be provided with the griddle.

2.6 Standard compliance. The griddle shall comply with American National Standards Institute (ANSI) Z83.14 and NSF International Standard No. 4. The stand for the type II griddles shall comply with NSF International Standard No. 2.

2.7 Data nameplate ("Government unique" requirement). The griddles shall be furnished with a data nameplate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying, (b) Identification tags, (c) Information not required, and (d) Optional marking information shall not apply. The data nameplate shall be made of minimum 20 gauge corrosion-resisting metal and attached to the griddle by rivets, screws, or welding in such a manner as to meet the applicable NSF International sanitary requirements for this equipment. In addition to the marking requirements of ANSI Z83.14, the plate shall contain the following information which shall be stamped, engraved, or applied by photosensitive means:

Contract Number
National Stock Number
Procurement Instrument Identification Number
CID Based Part Identification Number (PIN)
BTU Rating
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (List Only if Different from Manufacturer)
Manufacturer's Model and Serial Number
Government Approved Manual Number (see 5.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

Each plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the griddle.

2.8 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

2.9 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description unless otherwise specified.

2.10 Workmanship. The finished griddles shall be complete, clean, and free of fabrication marks, scratches, dents, sharp edges, sharp corners, burrs, slivers, or visible evidence of rust. Rivets, when used, shall be tight and the rivet heads and peened ends shall be round and concentric and in full contact with the joined metal surfaces. There shall be no empty rivet holes. Welds shall be clean, continuous, sound, and free of flux, pits, buildups, undercuts, and shall be ground so as to blend with the adjacent surfaces. Spot welds shall be free from pits, burn throughs, and flashes.

3. QUALITY ASSURANCE

3.1 Contractor certification. The contractor shall certify that the product offered meets the salient characteristics and requirements of this commercial item description and except for those Government unique requirements specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace or that had successfully been delivered to the Government on a previous contract or purchase order. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:38Z
Check the source to verify that this is the current version before use.

3.2 Compliance. Prior to approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the griddle conforms to the requirements of NSF International Standard No. 4 and ANSI Z83.14 and the applicable components shall comply with ANSI Z21.41 and ANSI Z21.45 (see 2.5). The stand for the type II griddles shall comply with NSF International Standard No. 2 (see 2.2).

3.2.1 NSF International. Acceptable evidence of meeting the requirements of NSF International Standards No. 2 and 4 shall be a listing in the current edition of the NSF International "Listing of Food Service Equipment" and display of the NSF International mark on the finished product, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable NSF International requirement(s).

3.2.2 American National Standards Institute (ANSI). Acceptable evidence of meeting the applicable requirements of ANSI Z21.4, ANSI Z21.45, and ANSI Z83.14 shall be a photostatic copy of the American Gas Association (AGA) Appliance Certificate; a listing of the griddle, regular and quick disconnect devices and connections in the AGA Directory of Certified Appliances and Accessories.

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or export, as specified (see 5.2).

4.2 Commercial.

4.2.1 Commercial packaging. Each griddle shall be cleaned, preserved, and packaged in accordance with ASTM D 3951.

4.2.2 Commercial packing. The griddle shall be packed in accordance with ASTM D 3951.

4.3 Export.

4.3.1 Export packaging. Each griddle shall be cleaned, preserved, and cushioned to protect against corrosion, deterioration, and physical damage during shipment and storage. Disassembled parts and accessories shall be packaged in a fiberboard box conforming to style optional, type CF or SF, class domestic of PPP-B-636.

4.3.2 Export packing. Each griddle with its parts packaged, shall be packed in a cleated plywood box conforming to domestic type, style optional, of PPP-B-601, or a cleated fiberboard box conforming to class II of PPP-B-591. Each box shall be closed and strapped in accordance with PPP-B-601 or PPP-B-591, as applicable. When specified (see 5.2), shipping containers shall be palletized in accordance with MIL-STD-147.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

4.4 Marking (commercial and export). Marking of shipping containers and unit loads shall be in accordance with MIL-STD-129, or ASTM D 3951, as applicable.

5. NOTES

5.1 Intended use. The griddles covered by this commercial item description are intended for use in kitchens to grill various foods.

5.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this commercial item description.
b. PIN designating type and size required (see 1.1, 1.2, and 5.4).
c. Government approved manual number to be included on data nameplate (see 2.7).
d. Selection of applicable packaging and packing required (see 4.1).
e. When palletization is required (see 4.3.2).

5.3 Sources for documents.

5.3.1 Sources for non-Government association documents.

AGA documents are available from:

American Gas Association (AGA)
8501 E. Pleasant Valley Road
Cleveland, OH 44129

ANSI Z21.41 - Quick-Disconnect Devices for Use with Gas Fuel
ANSI Z21.45 - Flexible Connectors of Other Than All-Metal Construction for Gas Appliances
ANSI Z83.14 - Gas Food Service Equipment (Counter Appliances)

ANSI documents are available from:

American National Standards Institute (ANSI)
11 West 42nd Street
New York, NY 10036

ASTM D 3951 - Standard Practice for Commercial Packaging

ASTM documents are available from:

American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

NSF International Standard No. 2 - Food Service Equipment
NSF International Standard No. 4 - Commercial Cooking Rethermalization and Powered Hot Food Holding and Transport Equipment


NSF International documents are available from:

NSF International
3475 Plymouth Road
P.O. Box 130140
Ann Arbor, MI 48113-0140

5.3.2 Source for Government documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.4 Part identification number (PIN). The PIN's to be used for items required by this CID are created as follows:

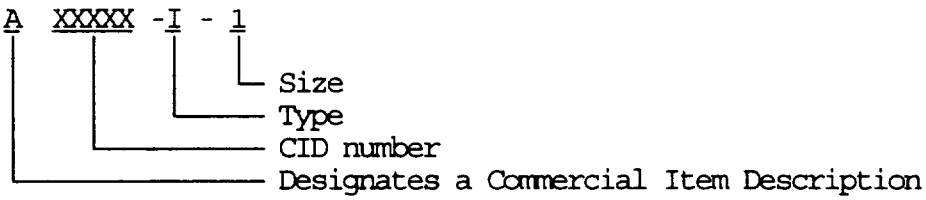

5.5 "Government unique" requirements. Whenever a "Government unique" requirement is included in the title of a paragraph under "Salient Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

5.6 Supersession data. The types and sizes of gas griddles covered by this commercial item description replace the items covered by MIL-G-2239 as indicated below:

CID-A-A-50037B	MIL-G-2239
Type I, size 1	Size 1
Type I, size 2	Size 2
Type II, size 1	Size 3
Type II, size 2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - SA
Air Force - 99

Review Activities

Army - MD, QM
Air Force - 50, 84
DLA - GS

User Activity

Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 7310-0821

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.