[INCH-POUND]
A-A-52547/1
February 26, 1996
SUPERSEDING
MS52103D
6 June 1984

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOSE ASSEMBLY, NONMETALLIC: FUEL AND OIL, MEDIUM PRESSURE, FLARED TUBE

The General Services Administration has authorized the use of this Commercial Item Description Specification Sheet (CIDSS) for all federal agencies.

The complete requirements for procuring hose assemblies described herein shall consist of this document and the issue in effect of Commercial Item Description (CID) A-A-52547.

1. SALIENT CHARACTERISTICS.

1.1 Material. The hose shall be made from the material in accordance with CID A-A-52547, Type III.

1.2 Design and construction. The hose shall be designed and constructed in accordance with Figure 1.

1.2.1 Fittings. Fittings shall be in accordance with SAE J516 female 37° flared type and as specified in CID A-A-52547.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.

AMSC N/A FSC 4720

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:12Z
Check the source to verify that this is the current version before use.

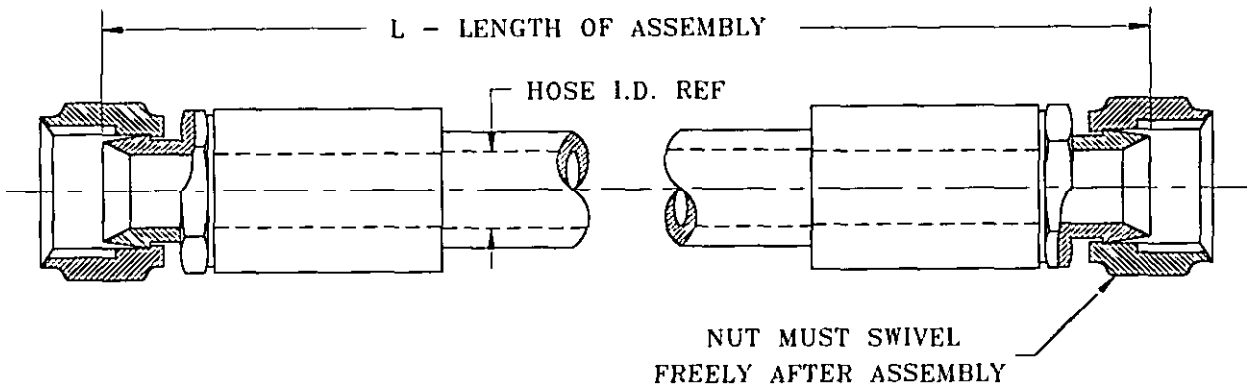


FIGURE 1. Overall dimensions for hose assembly.

1.3 Lengths. Hose assemblies shall be in accordance with the following length increments:

a. 0.5 inches (in.) [13 millimeters (mm)] increments for lengths under 24 in. (610 mm).
b. 1 in. (25 mm) increments for lengths between 24 in. to 36 in. (610 mm to 915 mm).
c. Not less than 2 in. (51 mm) increments for lengths over 36 in. (915 mm).

1.4 Tolerances. Hose assemblies shall be in accordance with the following tolerance limits:

a. ±0.13 in. (±3 mm) for lengths under 18 in. (457 mm).
b. ±0.25 in. (±6 mm) for lengths between 18 in. to 36 in. (457 mm to 915 mm).
c. ±0.50 in. (±12 mm) for lengths between 36 in. to 50 in. (915 mm to 1270 mm).
d. ±1% for lengths over 50 in. (1270 mm).

2. NOTES


(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

2.1 Addresses for obtaining copies of referenced documents.

2.1.1 Non-Government publications. Copies of SAE J516 "Hydraulic Hose Fittings (DOD Adopted)" are available from the Society of Automotive Engineers, Inc. (SAE), 400 Commonwealth Drive, Warrendale, PA 15096-0001.

2.2 Part or identification number (PIN). The PIN to be used for hose assemblies acquired to this CIDSS is created as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:12Z
Check the source to verify that this is the current version before use.

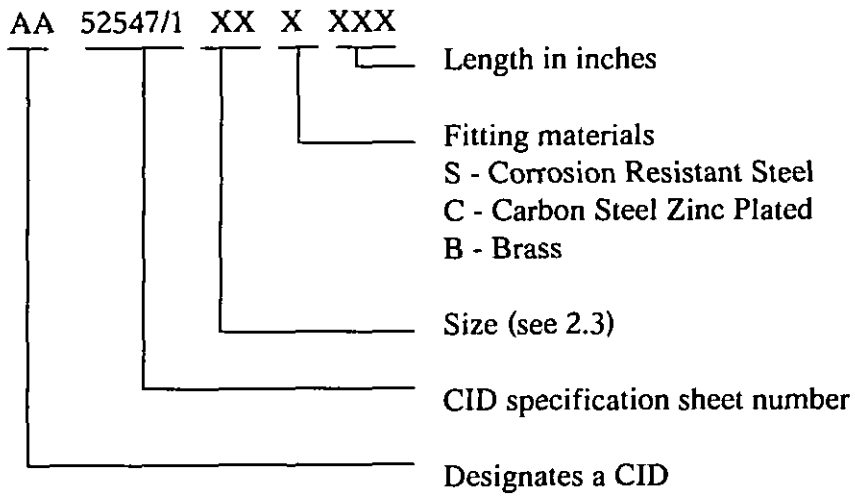

2.3 Size. The size designation for hose specified under this CIDSS shall be in accordance with the following table.

TABLE I. Hose and fitting thread sizes.

Size	Hose ID Ref.		Hose OD Ref.		Fitting thread Ref.
	in	mm	in	mm	
4	0.187	5.0	0.484	12.3	7/16 - 20
5	0.250	6.5	0.547	14.0	1/2 - 20
6	0.312	8.0	0.609	15.5	9/16 - 18
8	0.406	10.5	0.734	18.6	3/4 - 16
10	0.500	12.5	0.828	21.0	7/8 - 14
12	0.625	16.0	0.953	24.2	1-1/16 - 12
16	0.875	22.0	1.203	30.6	1-5/16 - 12
20	1.125	29.0	1.484	37.7	1-5/8 - 12
24	1.375	35.0	1.722	43.8	1-7/8 - 12
32	1.812	46.0	2.143	54.4	2-1/2 - 12

2.4 Marking. Marking shall consist of the PIN number in addition to the marking requirements of CID A-A-52547.

2.5 Cross-reference. Hoses conforming to this CIDSS are interchangeable/substitutable with hoses conforming to the MS52103D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:12Z
Check the source to verify that this is the current version before use.

A-A-52547/1

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD1

Review Activities:
Army - ME
Navy - MC, SH
DLA - CS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

Preparing Activity:
Army - AT

(Project 4720-0080)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:12Z
Check the source to verify that this is the current version before use.