INCH-POUND
A-A-52552
December 13, 1995
SUPERSEDING
MS53024A
25 May 1964

COMMERCIAL ITEM DESCRIPTION

HEADLIGHT-INFRARED, DOUBLE FILAMENT, 24 VOLT, WATERPROOF

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers a 24 volt (V), waterproof, double filament, infrared headlight used in military vehicles.

2. SALIENT CHARACTERISTICS

2.1 Materials. Unless otherwise specified herein, materials shall be in accordance with the manufacturer's material specifications for headlights. The use of recovered materials made in compliance with regulatory requirements is acceptable provided all the requirements of this CID are met (see 3.1).

2.1.1 Metals. Metals shall be of corrosion resistance type or shall be treated to resist corrosion.


Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.

FSC 6220

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

2.2 Design and construction. The design and construction of the headlight shall be as specified in figure 1 and ordnance drawings engineering parts lists (EPL) 8735875.

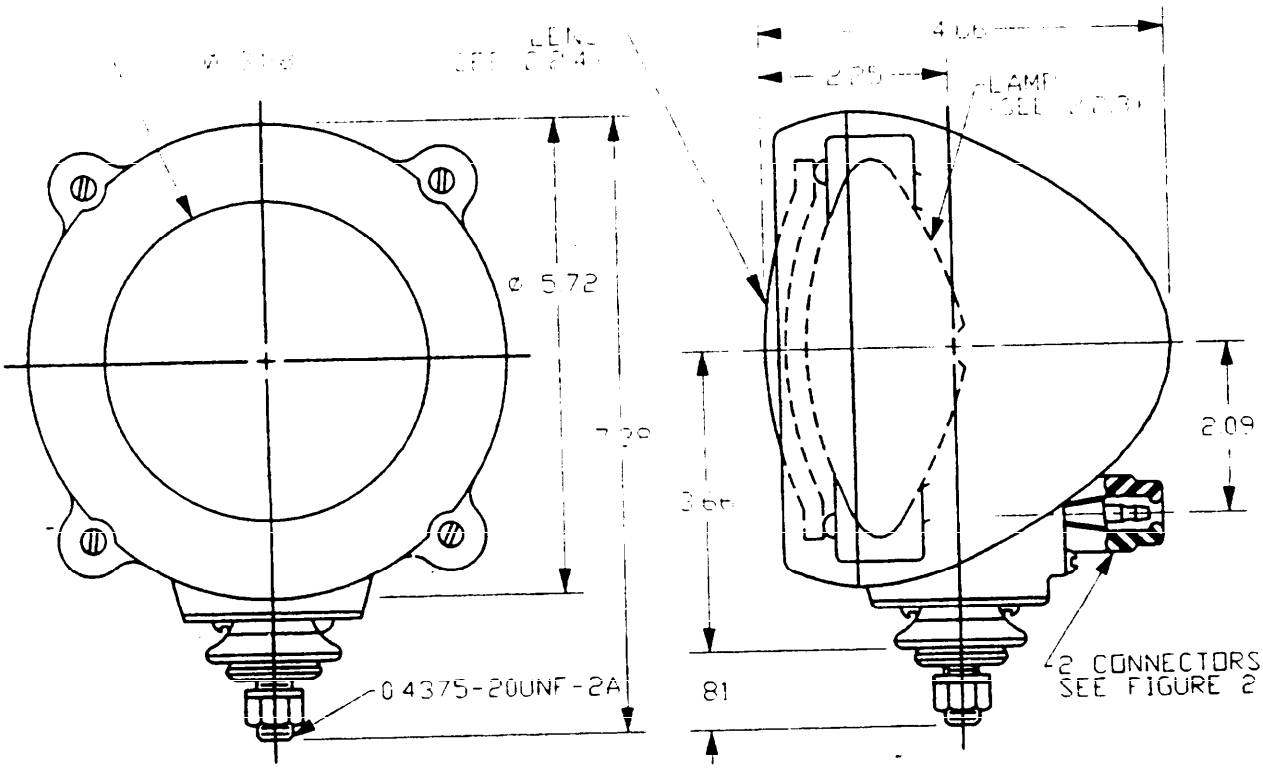

PIN number	Former MS part number	Ordinance drawing number
AA52552-1	MS53024-1	8735875

NOTES:


1. Unless otherwise specified, dimensions are in inches.
2. Lens tolerancing and dimensioning shall be in accordance with ANSI/ASME Y14.5, draft angle 10° max.
3. The lens shall withstand the thermal shock incurred when the lens at a temperature of 232 ± 3 degrees Celsius (°C) (450 ± 5 degrees Fahrenheit (°F)) is immersed in water at a temperature of 10 + 3°C (50 ± 5°F).

FIGURE 1. Headlight nominal dimension.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

2.2.1 Housing. The headlight housing shall be of sufficient size and mechanical strength to withstand handling, transit, storage and installation without causing malfunction or distortion.

2.2.2 Connectors. The headlight shall be provided with two electrical connector assemblies, as specified in figure 2.

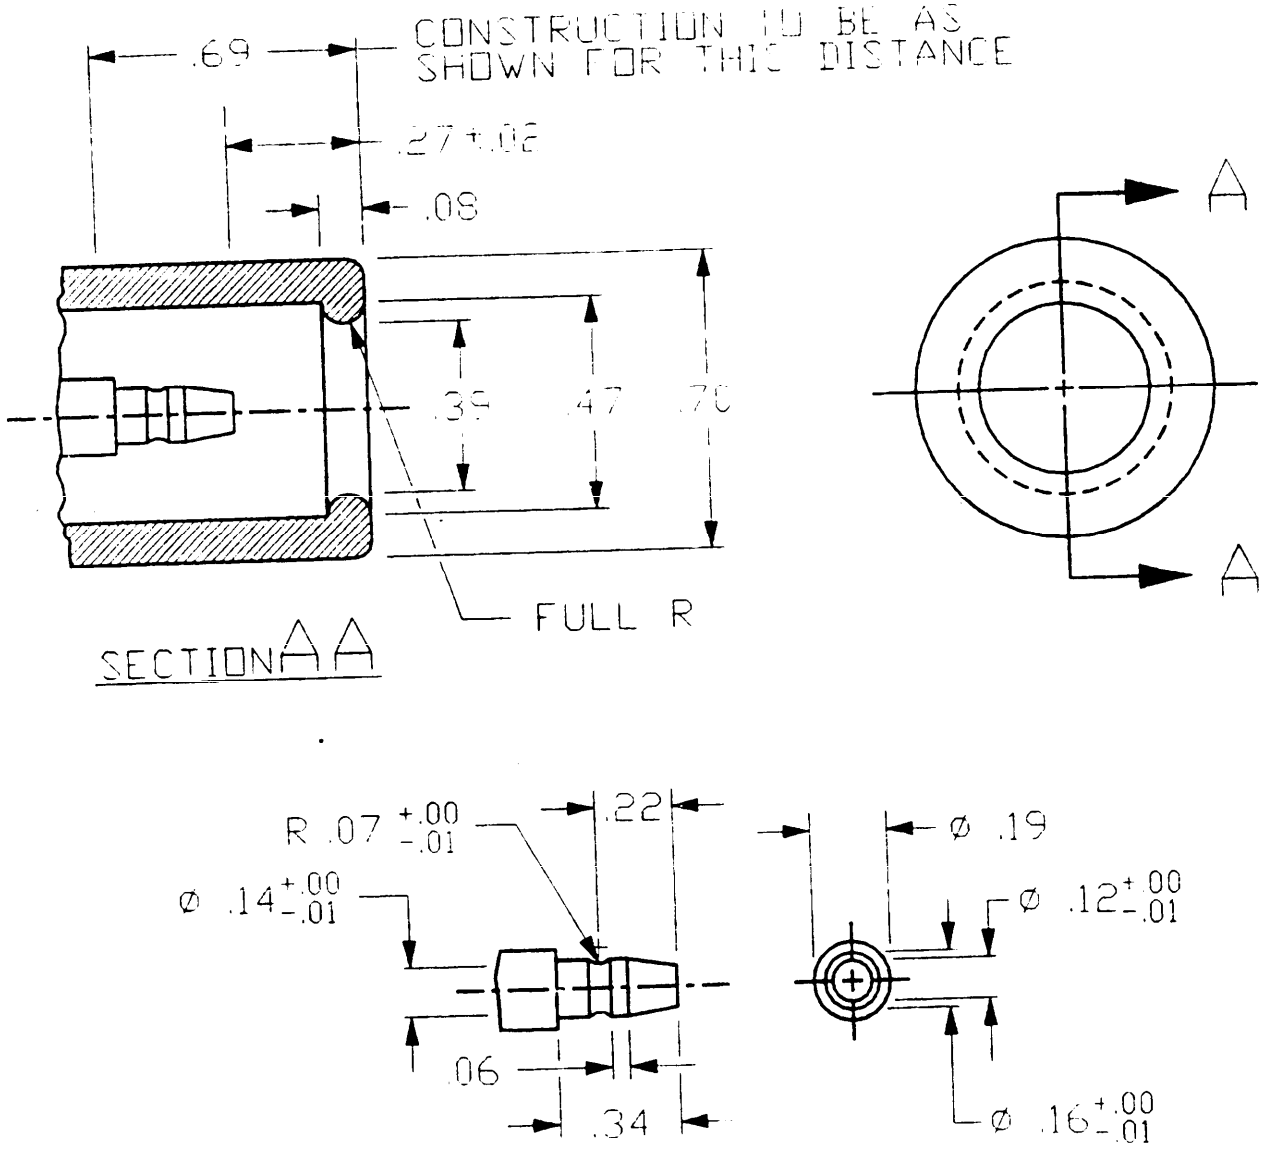

NOTE:

1. Unless otherwise specified, dimensions are in inches. Tolerances are + .005 on decimals, + 1° on angles, and + 0.015 on rubber products.

FIGURE 2. Electrical connector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

2.2.3 Lamp. The lamp shall meet the design and configuration requirements of GE lamp number 4811 or equivalent.

2.2.4 Lens. The lens shall meet the requirements of Gillinder Glass No. 5545 HR-IF140CH, Lancaster Glass No. 7962265 or equivalent.

2.3 Identification markings. Identification markings shall be permanent and legible and shall include as a minimum, the manufacturer's identification code (CAGE) and part number, the part identification number (PIN) AA52552-1 (see 6.2), the word "24 volt" and "U.S.".

3. REGULATORY REQUIREMENTS

3.1 Recovered material. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

4.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.3 Market acceptability (MA). Unless otherwise specified (see 6.2), the contractor shall provide products which have a proven market record based on the number of items sold, length of time the product has been on the market, and reliability and performance of the products as required under the contract or solicitation.

5. PACKING

Preservation, packing, and marking shall be as specified in the contract or order (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:13Z
Check the source to verify that this is the currentversion before use.

6.1.1 Army drawings. Copies of Army Drawings 8735875, light vehicle and 12369000 "Chemical Agent Resistant Coatings (CARC) Paint Systems Index" are available from the U.S. Army Tank-automotive and Armament Command, Warren, MI 48397-5000.

6.1.2 Non-Government documents. Copies of ANSI/AMSE Y14.5M "Dimensioning and Tolerancing" are available from the American National Standards Institute (ANSI), 11 West 42nd Street, New York, NY 10036.

6.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. Issue of Department of Defense Index of Specifications and Standards (DODISS) to be cited in the solicitation, and if required, the specific issue of individual documents referenced.
c. PIN number and quantity required.
d. Final top coat color of paint, if other than specified.
e. Selection of applicable level and packaging requirements.
f. If Market Acceptability requirements must appear in the solicitation.

6.3 Cross-reference data. Headlights conforming to this CID are interchangeable/substitutable with headlights conforming to MS53024A.

MILITARY INTERESTS:

Custodians
Army - AT
Navy - YD1
Air Force - 99

Review Activities
Army - CR
Navy - MC
Air Force - 82
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
Army - AT

(Project 6220-1085)

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:13Z
Check the source to verify that this is the currentversion before use.