FED. SUP CLASS
3455

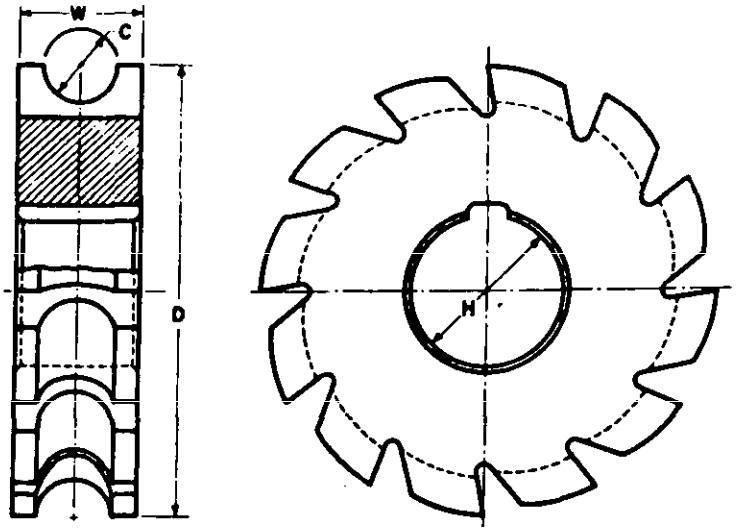


| DASH NO. | Cutter Size Diameter of Circle (C) | Diameter of Cutter (D) | Width of Face (W) | Diameter of Hole (H) |
|---|---|---|---|---|
| -2 | 3/16 | 2-1/4 | 3/8 | 1 |
| -4 | 5/16 | 2-3/4 | 9/16 | 1 |
| -5 | 3/8 | 2-3/4 | 5/8 | 1 |
| -6 | 7/16 | 3 | 3/4 | 1 |
| -7 | 1/2 | 3 | 13/16 | 1 |
| -8 | 5/8 | 3-1/2 | 1 | 1-1/4 |
| -9 | 3/4 | 3-3/4 | 1-3/16 | 1-1/4 |
| -10 | 7/8 | 4 | 1-3/8 | 1-1/4 |
| -11 | 1 | 4-1/4 | 1-9/16 | 1-1/4 |

NOTES:
1. Referenced documents shall be of the issue in effect on date of invitations for bids or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.
2. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
3. The part number consists of the MS number, plus the dash number.
Example: MS15698-2.

© CANCELED after 31 March 1981. For procurement use American National Standards Institute ANSI B94.19.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/2091

APPROVED 4 Oct 54 REVISED (A) 9 Apr 57 (B) 30 Mar 77 (C) 31 Mar 81

Review activity:
DSA-GS

This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection of all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

| P.A. AL | TITLE | MILITARY STANDARD |
|---|---|---|
| Other Cust 99 | CUTTERS, MILLING, CONCAVE | MS15698 |
| Procurement Specification GGG-C-755 | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM 1 SEP 68 672 (Coordinated) EDITION OF 1 SEP 67 MAY BE USED.

Project No. 3455-0070

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:50Z
Check the source to verify that this is the current version before use.