FED. SUP CLASS
5925

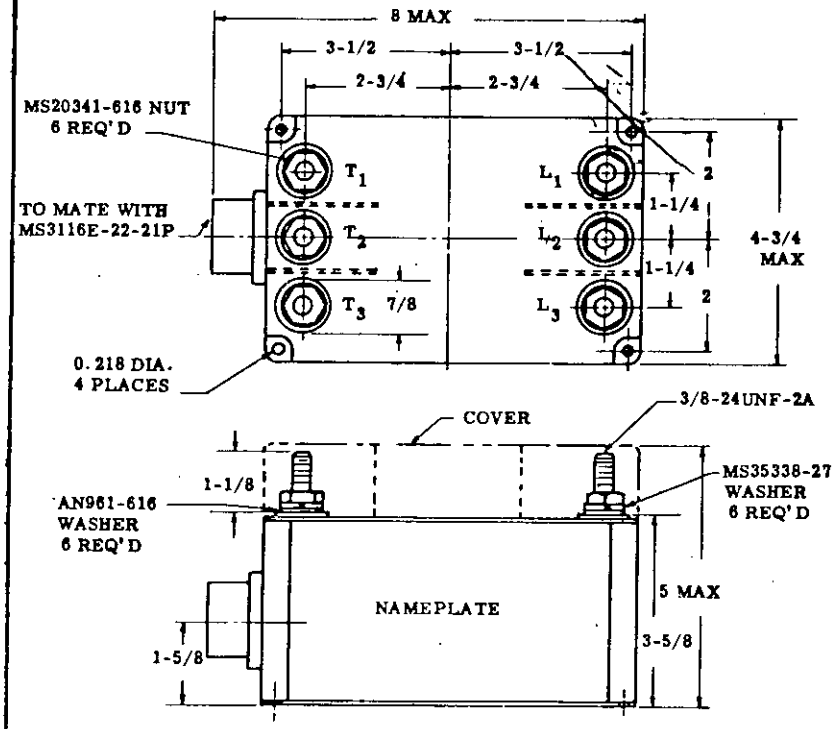

SCHEMATIC DIAGRAMS

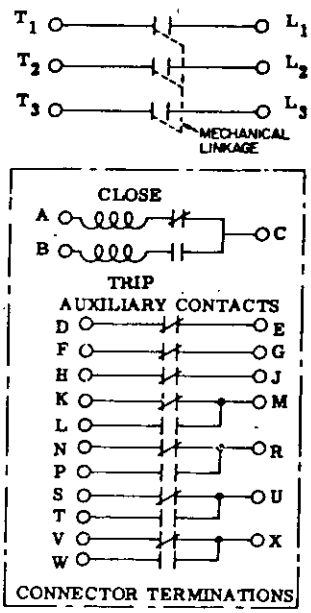

DETAIL REQUIREMENTS

(A)

Dash No.	Contact Rating - Amperes: Main Contacts Cont.	Main Contacts 5 min	Main Contacts 5 sec	Aux Contacts DC	Aux Contacts AC	Max Weight (lb)	Rating (kva)
1	120	165	240	10	2	5.5	40
2	180	250	360	10	2	6.0	60
3	270	375	540	10	2	6.5	90
4	360	500	720	10	2	7.5	120

(B)	Operating Temperature	-55° to +120° C
(C)	Operating Altitude	70,000 ft
(D)	Normal D-C Operating Voltage	25.5 v to 29.5 v
(E)	Pickup Voltage (Close Coil)	19.5 v Maximum
(F)	Pickup Voltage (Trip Coil)	12.0 v Maximum
(G)	Minimum Close Coil Resistance	2 ohms
(H)	Minimum Trip Coil Resistance	3 ohms
(I)	Minimum Operating Cycles	5,000 cycles
(J)	Contact Bounce	0.0025 sec
(K)	Interrupting Time	0.015 sec
(L)	Maximum Closing Time	0.02 sec
(M)	Maximum Tripping Time	0.01 sec
(N)	Terminals	
	Static Pull	100 lb
	Torque	150 lb in.

NOTES:

Dimensions in inches. Tolerance: Fractions ±1/32, Decimals ±0.01.
Barriers to be provided, contour optional - may be integral with terminal cover.

(A) CANCELED AFTER 14 APRIL 1981. NO SUPERSEDING STANDARD.

APPROVED 2 JULY 1964 REVISED (A) 14 APRIL 1981

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATIONS FOR BID.

P.A. Navy - BUWEPS Other Cust	TITLE CONTACTOR, LINE; 3-POLE, 115/200-VOLTS, 400-CPS, 3-PHASE LATCHING TYPE, 120-360 AMPS	MILITARY STANDARD MS18123 (WEP)
PROCUREMENT SPECIFICATION MIL-C-24010	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/2396

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.