FED. SUP CLASS
4730

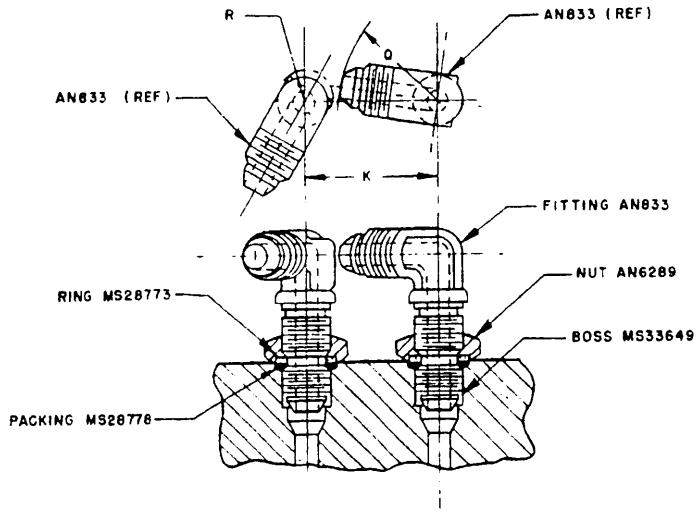

DASH NO REF	R	Q	K (MIN.)(1)
2	.181	.828	1.040
3	.225	.893	1.149
4	.252	.957	1.240
5	.296	1.022	1.349
6	.322	1.089	1.442
8	.434	1.360	1.825
10	.489	1.569	2.089
12	.586	1.795	2.412
16	.727	1.973	2.731
20	.894	2.229	3.154
24	1.034	2.428	3.493
28	1.243	2.720	3.994
32	1.375	2.905	4.311

(1) DIMENSION K = R + Q + .031

WHEN DIFFERENT SIZE BOSSES ARE USED, MAINTAIN MINIMUM SPACING EQUAL TO R OF SMALL FITTING PLUS Q OF LARGE FITTING PLUS .031

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED.

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER.

User activities:
Army - EL, MI

Review activities:
Army - AV, WC, MU

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 16 Aug 71 REVISED

P.A. Air Force - 11 Other Cust Navy - AS Army - AV	TITLE BOSS SPACING - HYDRAULIC DESIGN STANDARD FOR	MILITARY STANDARD MS21343
PROCUREMENT SPECIFICATION	SUPERSEDES AND10074	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:36Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:36Z
Check the source to verify that this is the current version before use.