INCH-POUND

MS25068K
6 January 2006
SUPERSEDING
MS25068J
15 November 1980

DETAIL SPECIFICATION SHEET

SWITCH, TOGGLE, FOUR POLE, SEALED TOGGLE

INACTIVE FOR NEW DESIGN AFTER 16 SEPTEMBER 1969.

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-83731.

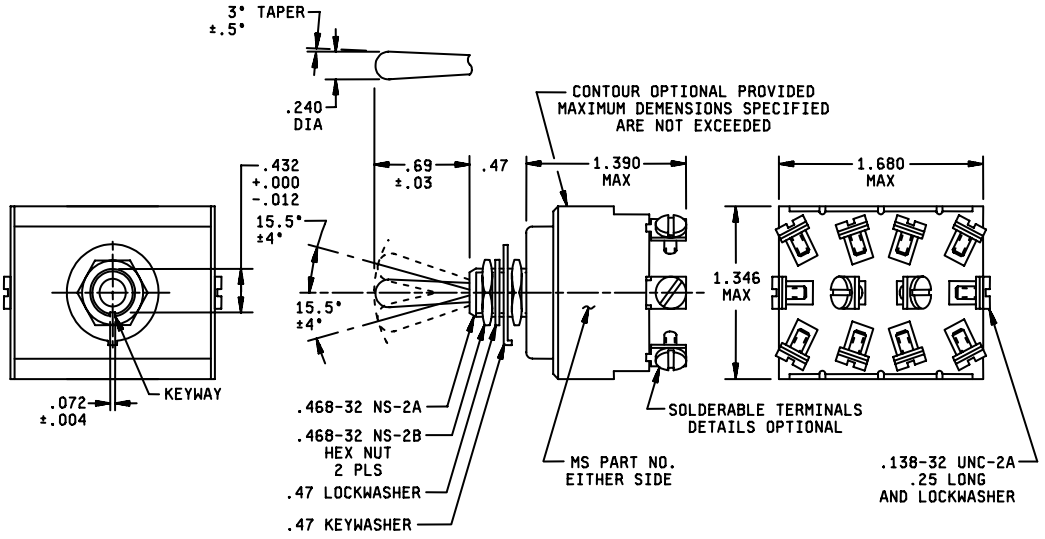

FIGURE 1 Dimensions and configurations

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:03Z
Check the source to verify that this is the current version before use.

NOTES:
1. All dimensions are in inches.
2. For hardware and terminal screw detail specifications see supplement of MIL-DTL-83731.
3. Unless otherwise specified, tolerance is ± .020 on two place decimals and ± .005 on three place decimals.
4. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

FIGURE1. Dimensions and configuration Continued.

REQUIREMENTS:

All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the toggle lever.

Maximum weight is 0.16 lbs.

Electrical Endurance: 10,000 Cycles.
Mechanical Endurance: 20,000 Cycles.

Electrical rating: See table I.

Referenced documents shall be of the issue in effect on the date of invitation for bid.

Table I Detail Requirements.

<table>
<tr><th rowspan="4">MS part No.</th><th rowspan="4">Former Ms Part No.</th><th colspan="3" rowspan="3">Circuit with Toggle Lever In</th><th colspan="6">Current Capacity (Amperes Per Pole)</th></tr>
<tr><th colspan="3">Direct current</th><th colspan="3">Alternating current (400 Hertz)</th></tr>
<tr><th rowspan="2">Keying side</th><th rowspan="2">Center</th><th rowspan="2">Opposite keying side</th><th>Lamp-Load Circuit</th><th>Resistive Circuit</th><th>Inductive Circuit</th><th>Lamp load Circuit</th><th>Resistive Circuit</th><th>Inductive Circuit</th></tr>
<tr><th>28 Volts</th><th>28 volts</th><th>28 Volts</th><th>115 volts</th><th>115 Volts</th><th>115 Volts</th></tr>
<tr><td>MS25068-21</td><td>MS25068-1</td><td rowspan="2">On</td><td>Off</td><td rowspan="5">On</td><td rowspan="3">5</td><td rowspan="3">20</td><td rowspan="3">12</td><td rowspan="3">4</td><td rowspan="3">20</td><td rowspan="3">15</td></tr>
<tr><td>MS25068-23</td><td>MS25068-3</td><td>None</td></tr>
<tr><td>MS25068-24</td><td>MS25068-11</td><td rowspan="2">None</td><td>Off</td></tr>
<tr><td>MS25068-25</td><td>MS25068-13</td><td>Mom Off</td><td rowspan="4">4</td><td rowspan="4">18</td><td rowspan="4">10</td><td rowspan="4">2</td><td rowspan="4">11</td><td rowspan="4">5</td></tr>
<tr><td>MS25068-26</td><td>MS25068-10</td><td rowspan="4">Mom-On</td><td>None</td></tr>
<tr><td>MS25068-27</td><td>MS25068-7</td><td rowspan="3">Off</td><td>Mom-On</td></tr>
<tr><td>MS25068-28</td><td>MS25068-12</td><td>None</td></tr>
<tr><td>MS25068-31</td><td>MS25068-5</td><td>On</td></tr>
</table>

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:03Z
Check the source to verify that this is the current version before use.

Referenced documents
MIL-DTL-83731

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – CR
Navy – AS
Air Force – 11
DLA – CC

Preparing activity:
DLA – CC

Project (5930-2005-004)

Review activities:
Army – AV
Navy – EC
Air Force – 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:03Z
Check the source to verify that this is the current version before use.