FED. SUP CLASS
6615

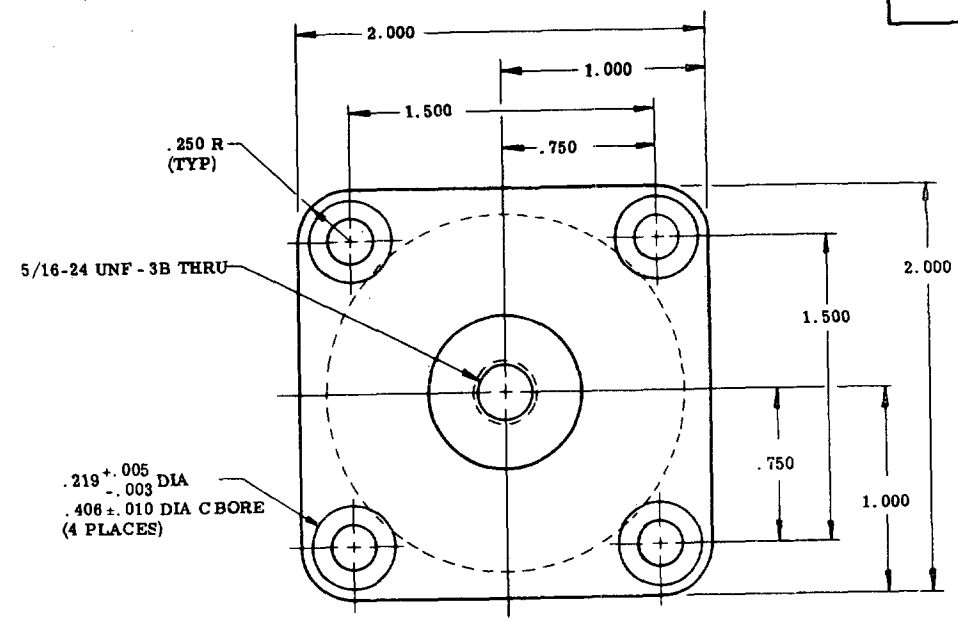


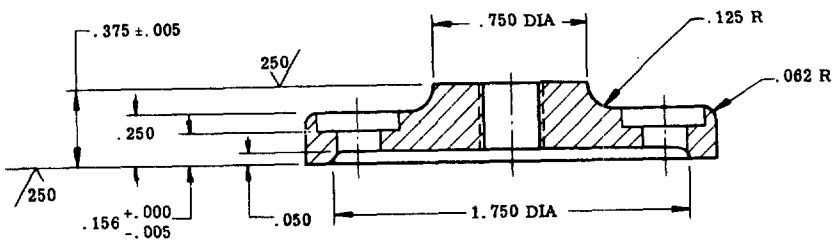


NOTES:

1. MATERIAL: ALUMINUM ALLOY CASTING,
2. FINISH: ANODIZE IN ACCORDANCE WITH MIL-A-8625, TYPE I, NONDYED.
3. SURFACE ROUGHNESS: ALL MACHINED SURFACES SHALL BE FINISHED PRIOR TO ANODIZING. SURFACE CONDITION FINISH DESIGNATIONS SHALL BE IN ACCORDANCE WITH USASI B46.1 - 1962.
4. THREAD SHALL CONFORM TO HANDBOOK H28.
5. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS ±.003. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH USASI Y14.5 - 1966.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 10 Jan 69 REVISED

Project No. 6615-N013

| P.A. NAVY - AS<br>Other Cust | TITLE<br>FOOT, SPECIAL | MILITARY STANDARD<br>MS3358(AS) |
|---|---|---|
| PROCUREMENT SPECIFICATION<br>MIL-N-81604 | SUPERSEDES: | SHEET 1 OF 1 |

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 17709

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-516/A-4269

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:03Z
Check the source to verify that this is the current version before use.