FED. SUP CLASS 5306

MS9500

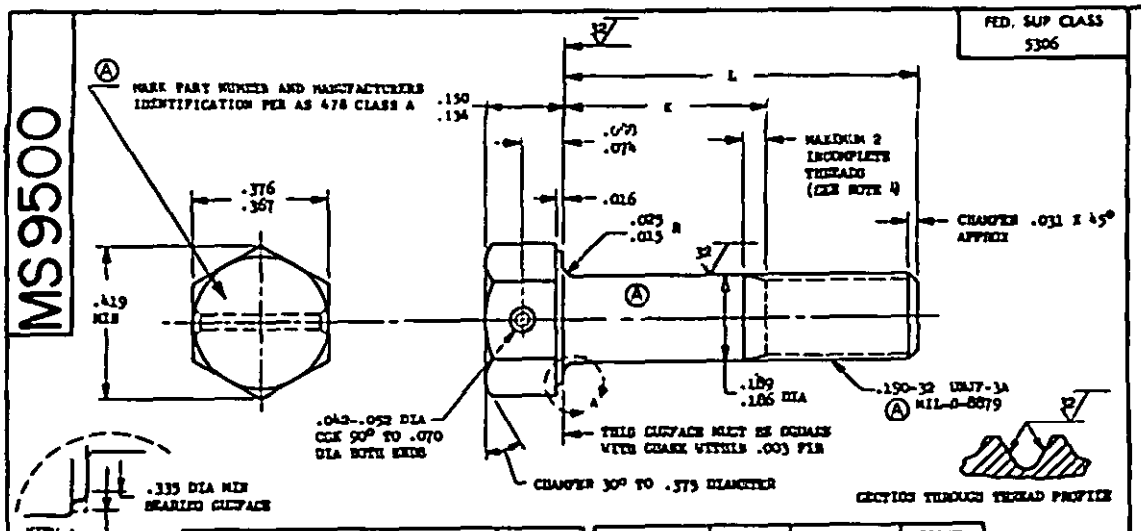

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9500-04	.375	.072-.092	.76
MS9500-05	.438	.072-.092	.81
MS9500-06	.500	.072-.092	.86
MS9500-07	.562	.072-.092	.91
MS9500-08	.625	.072-.092	.96
MS9500-09	.688	.072-.092	1.01
MS9500-10	.750	.072-.120	1.06
MS9500-11	.812	.122-.182	1.11
MS9500-12	.875	.185-.245	1.16
MS9500-13	.938	.248-.308	1.21
MS9500-14	1.000	.310-.370	1.26
MS9500-15	1.062	.372-.432	1.31
MS9500-16	1.125	.435-.495	1.36
MS9500-17	1.188	.498-.558	1.41
MS9500-18	1.250	.560-.620	1.45
MS9500-19	1.312	.622-.682	1.50
MS9500-20	1.375	.685-.745	1.55
MS9500-21	1.438	.748-.808	1.60
MS9500-22	1.500	.810-.870	1.65
MS9500-23	1.562	.872-.932	1.70
MS9500-24	1.627	.935-.995	1.75
MS9500-25	1.688	.998-1.058	1.80
MS9500-26	1.750	1.060-1.120	1.85
MS9500-27	1.875	1.185-1.245	1.95
MS9500-28	2.000	1.310-1.370	2.05
MS9500-29	2.125	1.435-1.495	2.15
MS9500-30	2.250	1.560-1.620	2.26
MS9500-31	2.375	1.685-1.745	2.36
MS9500-32	2.500	1.810-1.870	2.46
MS9500-33	2.625	1.935-1.995	2.56
MS9500-34	2.750	2.060-2.120	2.66
MS9500-35	2.875	2.185-2.245	2.76
MS9500-36	3.000	2.310-2.370	2.86
MS9500-37	3.125	2.435-2.495	2.93
MS9500-38	3.250	2.560-2.620	3.03
MS9500-39	3.375	2.685-2.745	3.13
MS9500-40	3.500	2.810-2.870	3.23
MS9500-41	3.625	2.935-2.995	3.33
MS9500-42	3.750	3.060-3.120	3.43
MS9500-43	3.875	3.185-3.245	3.53
MS9500-44	1.812	1.122-1.182	1.90
MS9500-45	1.938	1.248-1.308	2.00

(A) 1. CRACK SHALL BE STRAIGHT WITHIN .003 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE CRACK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE CRACK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .011 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5731.
6. MANUFACTURING SPECIFICATION: AMS 7477.
7. FLUORESCENT PENETRANT INSPECTION PER AMS 2649.
(A) 8. SURFACE TEXTURE: USAS B46.1-1962 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEXAGON
9. BREAK SHARP EDGES .003-.013 UNLESS OTHERWISE SPECIFIED.
10. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
11. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
(A) THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

Review activities: Army - MC, MI
DLA - GS, IS

User activities:

This military standard is approved by the Department of Defense and is mandatory on all activities. Suggestions for all new engineering and design applications and for revisions now should be made from this document.

APPROVED 5 May 1965 REVISED (A) 17 Nov 69

P.A. DLA - LI Other Cust - Army - AV Navy - AS	INTERNATIONAL INTEREST ASCC AIR STD 17/2	TITLE (A) BOLT, MACHINED - HEXAGON HEAD, DRILLED, 1 HOLE, FULL SHANK, AMS 5731, .190-32 UNJF-3A	MILITARY STANDARD MS9500
PROCUREMENT SPECIFICATION		SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-393-093/5-3740

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:18Z
Check the source to verify that this is the current version before use.