FED. SUP CLASS
5315

MS 9841 (ASG)

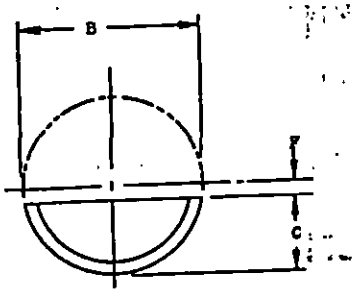



MARK EC1 MATERIAL CODE AND MANUFACTURER'S IDENT ON SIZES -01 THRU -04 PER AS478-37. ON SIZES -05 AND LARGER PER AS478 CLASS A



PART NO.	NOMINAL KEY SIZE A	NOMINAL KEY SIZE B DIA	A +.0010 -.0000	B DIA +.000 -.010	C +.000 -.005	F REF	G DIM.	G TOL	APPROX WEIGHT LB/100
MS9841-01	.062	.250	.0625	.250	.109	.016	.010	+.010 -.000	.04
MS9841-02	.062	.312	.0625	.312	.140	.016	.010		.06
MS9841-03	.062	.375	.0625	.375	.172	.016	.010		.09
MS9841-04	.062	.500	.0625	.500	.203	.047	.010		.13
MS9841-05	.062	.312	.0938	.312	.140	.016	.020		.10
MS9841-06	.094	.375	.0938	.375	.172	.016	.020		.14
MS9841-07	.094	.500	.0938	.500	.203	.047	.020		.20
MS9841-08	.094	.625	.0938	.625	.250	.062	.020		.32
MS9841-09	.125	.375	.1250	.375	.172	.016	.030		.19
MS9841-10	.125	.500	.1250	.500	.203	.047	.030		.27
MS9841-11	.125	.625	.1250	.625	.250	.062	.030		.42
MS9841-12	.125	.750	.1250	.750	.313	.062	.030		.46
MS9841-13	.156	.625	.1563	.625	.250	.062	.030		.40
MS9841-14	.156	.750	.1563	.750	.313	.062	.030		.57
MS9841-15	.156	.875	.1563	.875	.375	.062	.030		.78
MS9841-16	.188	.750	.1875	.750	.313	.062	.040		.69
MS9841-17	.188	.875	.1875	.875	.375	.062	.040		.94
MS9841-18	.188	1.000	.1875	1.000	.438	.062	.040		1.24
MS9841-19	.188	1.125	.1875	1.125	.484	.078	.040		1.57
MS9841-20	.250	.875	.2500	.875	.375	.062	.050		1.26
MS9841-21	.250	1.000	.2500	1.000	.438	.062	.050		1.71
MS9841-22	.250	1.125	.2500	1.125	.484	.078	.050		2.10
MS9841-23	.250	1.250	.2500	1.250	.547	.078	.050		2.67
MS9841-24	.250	1.375	.2500	1.375	.594	.094	.050		3.23
MS9841-25	.250	1.500	.2500	1.500	.641	.109	.050	+.015 -.000	3.84
MS9841-26	.312	1.000	.3125	1.000	.438	.062	.050		2.13
MS9841-27	.312	1.125	.3125	1.125	.484	.078	.050		2.69
MS9841-28	.312	1.250	.3125	1.250	.547	.078	.050		3.33
MS9841-29	.312	1.375	.3125	1.375	.594	.094	.050		4.03
MS9841-30	.312	1.500	.3125	1.500	.641	.109	.050		4.79
MS9841-31	.375	1.250	.3750	1.250	.547	.078	.060		4.00
MS9841-32	.375	1.375	.3750	1.375	.594	.094	.060		4.88
MS9841-33	.375	1.500	.3750	1.500	.641	.109	.060		5.76

1. MATERIAL: AMS5640 CORROSION RESISTANT STEEL.
2. HARDNESS: ROCKWELL B 70-100.
3. SURFACE ROUGHNESS: AS291. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
4. BREAK SHARP EDGES .003 to .015.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
6. DO NOT USE UNASSIGNED PART NUMBERS.

APPROVED 15 May 68 REVISED

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE-AEROSPACE PROPULSION DIVISION.

P.A. AF - 11	TITLE	MILITARY STANDARD
Other Cust Navy - AS	KEY, WOODRUFF - CHAMFERED CRES AMS5640	MS 9841 (ASG)
PROCUREMENT SPECIFICATION None	SUPERSEDES:	SHEET 1 OF 1

☆ U.S. GOVERNMENT PRINTING OFFICE

DD FORM 672-1 (Limited coordination)
ASD use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: USAF 82, 85

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:26Z
Check the source to verify that this is the current version before use.