GGG-B-00101e(GSA-FSS)
January 19, 1968
INTERIM REVISION OF
Fed. Spec. GGG-B-101d
April 18, 1963

INTERIM FEDERAL SPECIFICATION

BARS: CHISEL, PINCH, PRY, WRECKING, DIGGING, TAMPING, DIGGING AND TAMPING; AND CROWBARS

This Interim Federal Specification was developed by Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C., 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification GGG-B-101d, dated April 18, 1963.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers various types of bars normally used by mechanics and laborers as applicable.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types, classes, and styles. The bars shall be of the following types, classes, and styles, as specified (see 6.1):

Type I. - Chisel.
Type II. - Crowbar.
  Class 1. - Pinch-point.
  Class 2. - Wedge-point.
Type III. - Pinch (offset).
Type IV. - Pry (rolling-head).
Type V. - Wrecking.
  Class 1. - Gooseneck and pinch-point.
    Style A. - With claw.
    Style B. - With claw and heel (door opener).
  Class 2. - Offset claw and pinch-point.
Type VI. - Earth digging and tamping.
  Class 1. - Posthole.
  Class 2. - Telegraph.
Type VII. - Earth digging.
Type VIII. - Earth tamping.
Type IX. - Pinch (straight).

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, or request for proposal, form a part of this specification:

Federal Standards:
  Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
  Fed. Std. No. 151 - Metals; Test Methods.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Forth Worth, Denver, San Francisco, and Auburn, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbocks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specification:
MIL-H-15424 - Hand Tools; Packaging of.

Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of bars otherwise conforming to this specification.

3.2 Material. The material used in the manufacture of the bars shall be of either tool steel or an alloy steel. The chemical composition of the material and the heat treatment employed shall be such as to produce bars to withstand the tests as specified in 4.4. All forgings shall be of uniform quality, free from defects and imperfections that may affect their serviceability or durability.

3.3 Design. The bars, otherwise meeting the requirements of this specification, may be the manufacturer's standard design.

3.4 Finish. The bars shall be free from burrs, roughness and excessive oxide scale. The body of the bars and the striking end of the type I bar shall be either lacquered, enameled, painted, or have an oil-coated natural finish. The work ends of types I, III, IV, and V bars shall be smoothly ground and have a natural finish, oil coated or lacquered. The work ends of the types II, VI, VII, VIII, and IX bars shall have smooth finish, and be oil or phosphate coated, lacquered, or painted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

3.5 Identification marking. Each bar shall be plainly and permanently marked with the name of the manufacturer or with a trademark of such known character that the source of manufacture may be readily determined.

3.6 Type I chisel. Type I bars shall have a double-beveled cutting edge, ground on both sides to an included angle of 60° ± 5°. The minimum width of the cutting edge shall be equal to the distance across the flat surfaces of the bar. The striking end of the bar shall be neatly and uniformly chamfered. The chisel shall withstand the cutting test and uniformly chamfered. The chisel shall withstand the cutting test specified in 4.4.2.1.

3.6.1 Hardness. The work end of the bar shall show a hardness reading of not less than 48 nor more than 56 on the Rockwell C scale.

3.6.2 Type I bars shall conform to table I and be similar to figure 1.

TABLE I. Type I chisel bar

Size number	Dimensions between opposite flats ± 1/32	Overall length ± 1/2
	Inch	Inches
1	5/8	18
2	3/4	24
3	7/8	30
4	1	36

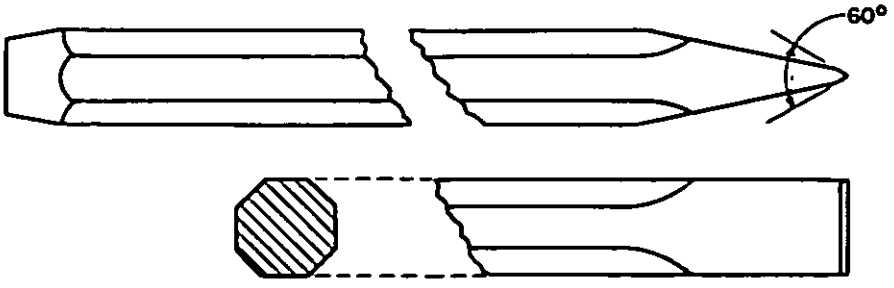


FIGURE 1. Type I, chisel bar.

3.7 Type II, crowbar. Type II bars shall have a round handle tapering slightly toward the handle end. The work end shall be equal in width to the distance across the flat surfaces of the bar. The bar shall not fracture nor show a permanent set when tested in accordance with 4.4.2.2.

3.7.1 Hardness. The work ends of the bars shall show a hardness reading of not less than 38 nor more than 48 on the Rockwell C scale (see table II and 4.4.1).

3.7.2 Class 1, pinch-point. The formed end of class 1 bars shall have square sides, with a flat single beveled edge. The bars shall conform to table II and be similar to figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

TABLE II. Type II, classes 1 and 2 crowbar, pinch-point and wedge point

Size Number	A		B	C	D	Area of Hardness From Pinch or Wedge Point Minimum	Weight		Test Load
	Minimum	Maximum	± 1/16	Minimum	± 3/16		Minimum	Maximum	Minimum
	Inches	Inches	Inches	Inches	Inch	Inches	Pounds	Pounds	Pounds
1	35	37	7/8	2	9/16	4	5	7	100
2	47	49	1	2-1/2	3/4	5	9	11	150
3	50	52	1-1/8	2-1/2	3/4	5	11	13	175
4	59	62	1-1/4	3	7/8	6	17	19	200
6	65	68	1-1/2	3	7/8	6	25	27	300

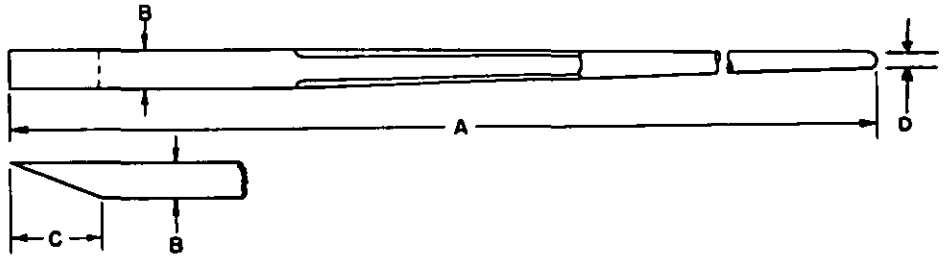


FIGURE 2. Type II, class 1, crowbar, pinch-point.

3.7.3 Class 2, wedge-point. The formed end of class 2 bars shall have square sides with a double-beveled edge. The bars shall conform to table II and be similar to figure 3.

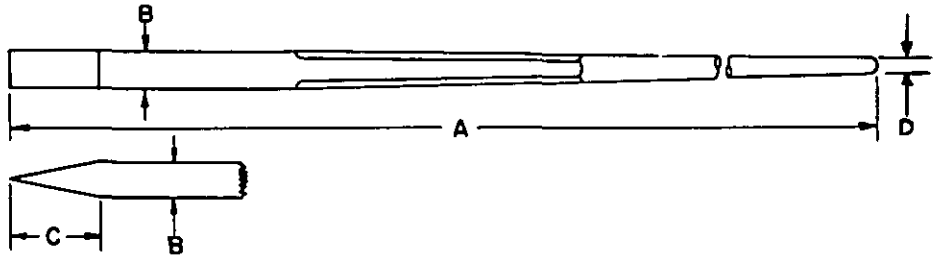


FIGURE 3. Type II, class 2, crowbar, wedge-point.

3.8 Type III, pinch (offset). Type III bars shall have one end rounded and offset. The other end shall be round and tapered for bringing holes into alignment in metal plates. The bar shall withstand the test specified in 4.4.2.3.

3.8.1 Hardness. The work ends of the bar shall show a hardness reading of not less than 35 nor more than 45 on the Rockwell C scale (see 4.4.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

3.8.2 Type III bars shall conform to table III and be similar to figure 4.

TABLE III. Type III, pinch (offset)

Size Number	Dimensions Between Opposite Flats ± 1/32	Length Overall ± 1/2	Dimensions						Test Load Min.
			A ± 1/8	B ± 1/8	C ± 1/8	D ± 1/16	E ± 1/4	F ± 1/64	
	Inch	Inches	Inches	Inches	Inches	Inch	Inches	Inch	Pounds
1	1/2	13-1/2	1	11/16	15/16	3/16	2-3/4	3/16	40
2	5/8	15	2-1/4	1	1	—	5-3/4	1/4	50
3	3/4	26	1-1/2	1	1-1/4	5/16	3	5/16	75
4	7/8	30	1-3/4	1-1/8	1-1/2	3/8	3-1/2	3/8	100
5	1	36	2	1-1/4	1-3/4	7/16	4	7/16	150

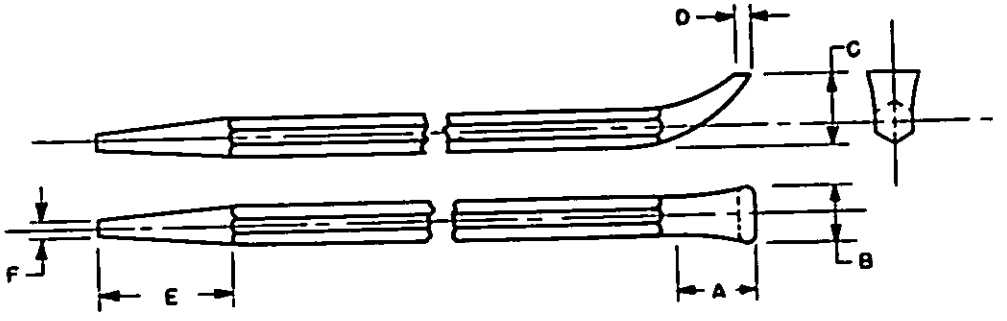


FIGURE 4. Type III, pinch (offset).

3.9 Type IV, pry (rolling-head). Type IV bars shall have the work end terminate in a rounded rolling head. The back side of the rolling head shall be suitably rounded. That portion of the head opposite the rounded side shall form a hook. The tapered end of the bar shall be round, smoothly finished, neatly and uniformly tapered, and shall be provided with a pointed end. The bar shall withstand the test specified in 4.4.2.4.

3.9.1 Hardness. The hardness shall be as specified in 3.7.1.

3.9.2 Type IV bars shall conform to table IV and be similar to figure 5.

Table IV Type IV, pry (rolling-head)

Size number	Dimension between opposite flats		Length overall		Dimensions										Test load min.
					A		B	C	D		E	F	G		
	Mini-mum	Maxi-mum	Mini-mum	Maxi-mum	Mini-mum	Maxi-mum	Mini-mum	Mini-mum	Mini-mum	Maxi-mum	Mini-mum	Mini-mum	Mini-mum	Maxi-mum	
	Inch	Inch	Inches	Inches	Inch	Inch	Inch	Inches	Inch	Inch	Inches	Inch	Inch	Inch	Pounds
1	1/2	9/16	15	18	1/2	9/16	9/16	1-3/8	1/2	9/16	4-3/4	3/16	1/4	7/32	9/32	75

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

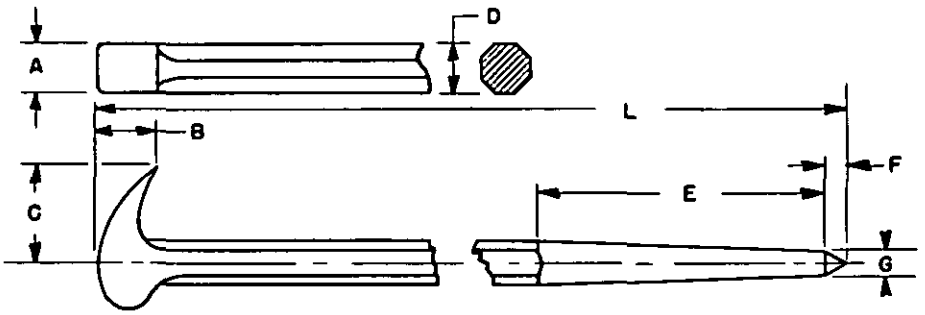


FIGURE 5. Type IV, pry (rolling-head).

3.10 Type V, wrecking. For a minimum distance of 2-3/4 inches from each end, type V wrecking bars shall have a hardness value of not less than 28 nor more than 47 on the Rockwell C scale (see 4.4.1).

3.10.1 Class 1, gooseneck and pinch-point. Class 1 bars shall have one end bent in the form of a gooseneck and the opposite end in the form of a pinch-point.

3.10.1.1 Style A with claw. Style A bars shall have the gooseneck provided with a slotted claw suitable for pulling nails. The bar shall not fracture nor show a permanent set in excess of 1/32 inch measured at point of load application when tested in accordance with 4.4.2.5. The opposite end shall be wedge-shaped and shall be offset at an angle of 30° ± 5° from the longitudinal axis of the bar. The bar shall conform to table V and be similar to figure 6.

TABLE V. Type V, class 1, style A wrecking bar, gooseneck with claw and pinch point, with claw

Size Number	Dimensions									Test Load	Load Distance From End
	A	D	E	F	H	J	K	L	M		
	≯ 1.000 ≮ .500	± 1/32	≯ 1/8 ≮ 1/16	± 1/8	± 1/32	Minimum	± 1/16	Minimum	± 1/32		
	Inches	Inch	Inches	Inches	Inch	Inches	Inch	Inches	Inch	Pounds	Inches
1	12	1/16	3/4	1	1/2	3/4	1/4	1-1/16	1/16	150	8
2	18	1/16	15/16	1-1/8	5/8	1	5/16	1-1/8	1/16	150	14
3	24	1/16	1	1-3/8	3/4	1-5/16	7/16	1-3/16	1/16	125	20
4	30	1/16	1	1-3/8	3/4	1-5/16	7/16	1-3/16	1/16	100	26
5	36	1/16	1	1-3/8	3/4	1-5/16	7/16	1-3/16	1/16	75	32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

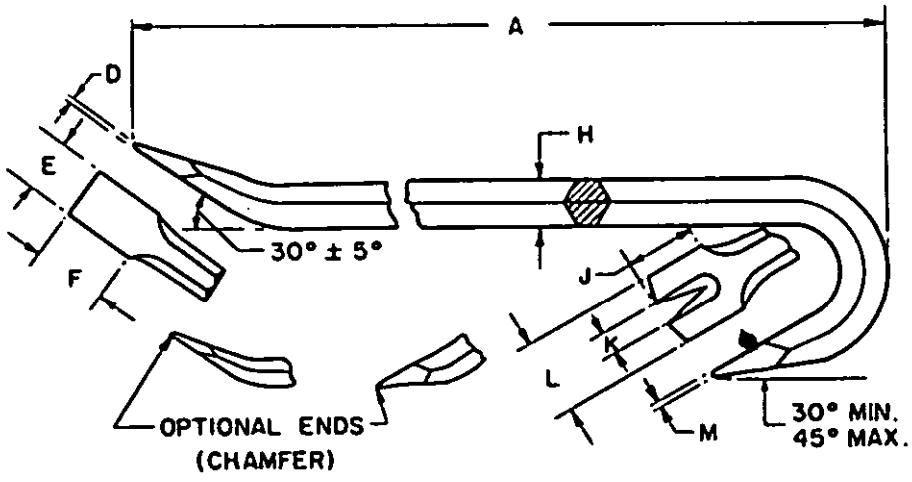


FIGURE 6. Type V, class 1, style A wrecking bar, gooseneck, with claw, and pinch point.

3.10.1.2 Style B, with claw and heel (door opener). Style B bars shall be suitable for opening doors and removing obstructions in fire-fighting operations. The gooseneck end of the bar shall be provided with a heel. The opposite end shall be rounded and offset in the same direction as the gooseneck, and shall be provided with a slotted claw. The bars shall conform to the dimensions shown on figure 7.

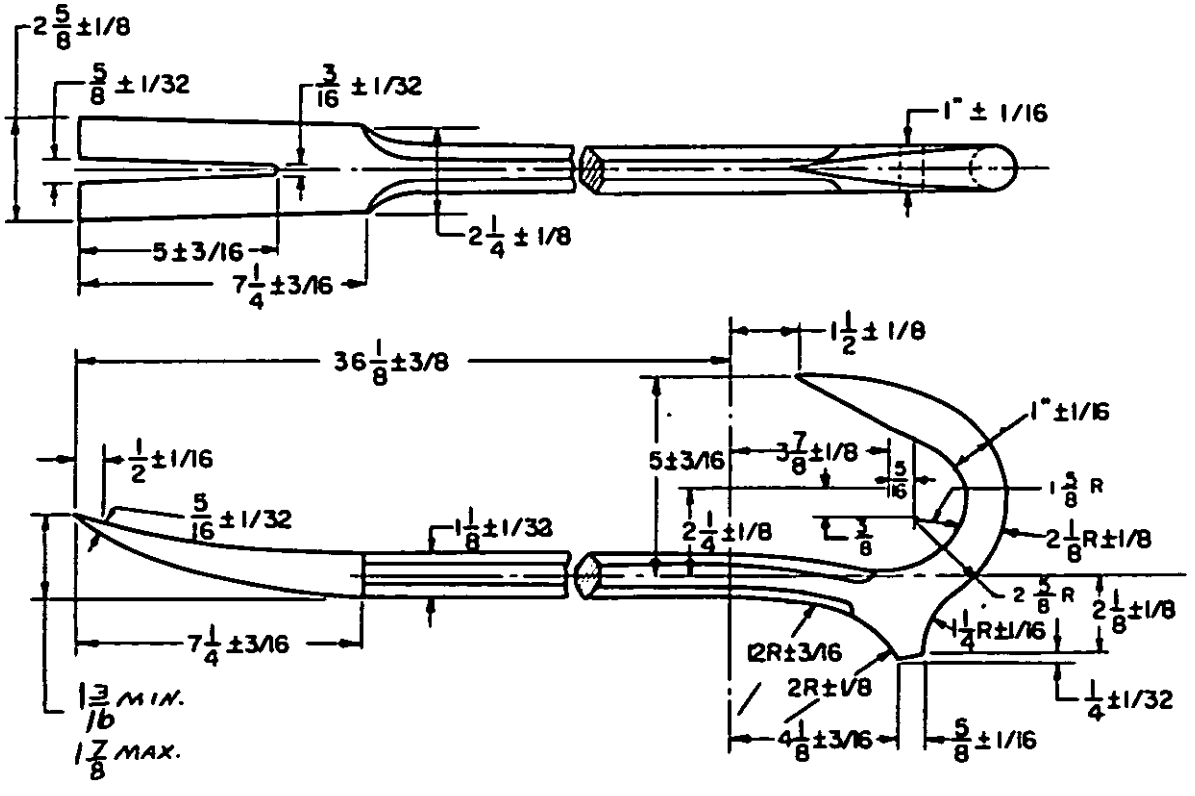


FIGURE 7. Type V, class 1, style B wrecking bar, gooseneck, with heel, and pinch point, with claw.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:37Z
Check the source to verify that this is the currentversion before use.

3.10.2 Class 2, offset claw and pinch-point. Class 2 bars shall have the ends offset in opposite directions at an angle of 30° ± 5° from the longitudinal axis. Both ends shall be wedge-shaped with one end provided with a slotted claw suitable for pulling nails. The bars shall be furnished in lengths of 30 or 36 inches as specified (see 6.1). Class 2 bars shall not fracture nor show a permanent set in excess of 1/32 inch measured at point of load application (26 and 32 inches from end for 30 and 36-inch bars, respectively) when tested in accordance with 4.4.2.5. The bars shall conform to the dimensions shown in figure 8.

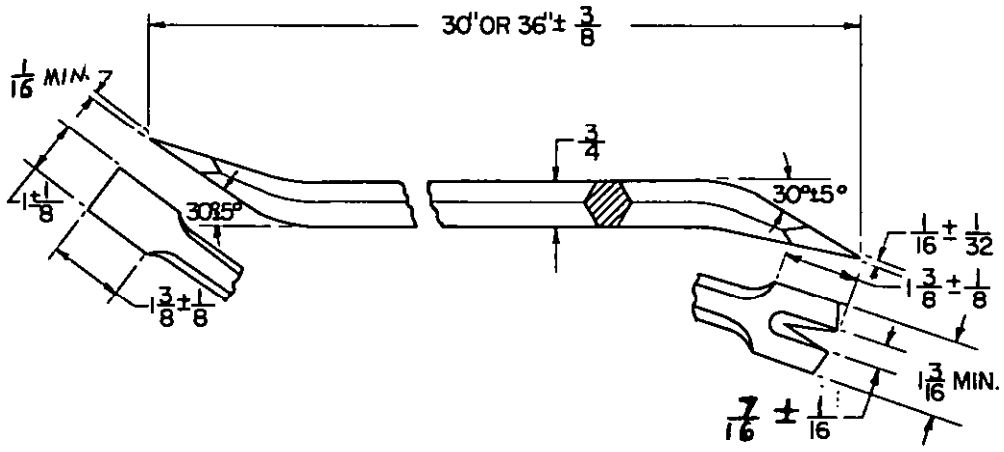


FIGURE 8. Type V, class 2 wrecking bar, offset claw and pinch-point.

3.11 Type VI, earth digging and tamping. Type VI bars at one end shall be provided with a tamping head suitable for tamping operation, and the opposite end formed to a bit. The bit end shall be smoothly finished and uniformly tapered, having a cutting edge ground to a double-beveled edge. The tamping head shall have a flat surface for tamping, and the opposite side of the tamping head shall be either flat or beveled. The bars shall withstand the test specified in 4.4.2.6.

3.11.1 Hardness. The chisel end of the bar shall show a hardness reading of not less than 42 nor more than 52 on the Rockwell C scale (see 4.4.1).

3.11.2 Class 1, posthole. The sides of the bit shall be either parallel or tapered toward the shank. Class 1 bars shall conform to table VI, and be similar to figure 9.

Table VI. Type VI, class 1, earth digging and tamping bar, posthole

Size Number	Dimensions												Weight	Test Load
	A		B		C		D	E	F	G	H	I		
	Min.	Max.	Min.	Max	Min.	Max.	Min.	Min.	±1/32	Min.	Max.	Min.	Min.	Min.
	Inches	Inches	Inches	Inches	Inches	Inches	Inch	Inches	Inch	Inch	Inch	Inch	Pounds	Pounds
1	68-1/2	73	2-1/8	2-5/8	2-1/4	3	1/8	8-1/2	1	1/4	1/4	3/4	15	150

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

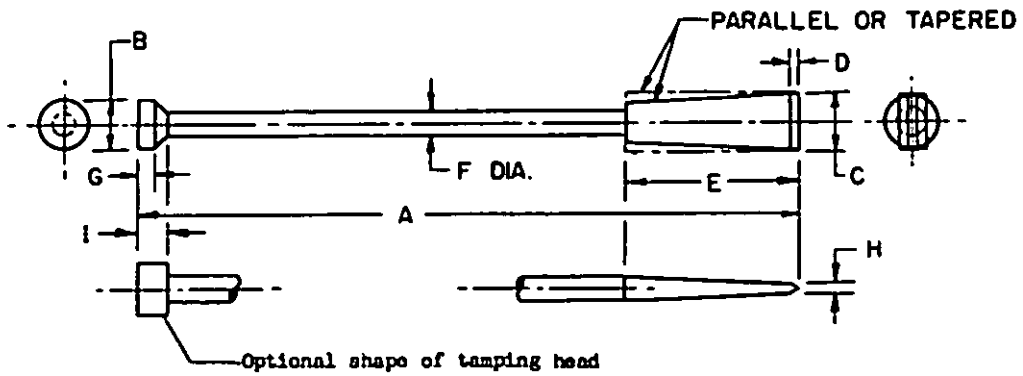


FIGURE 9. Type VI, class 1, earth-digging and tamping bar, posthole.

3.11.3 Class 2, telegraph. Class 2 bars shall conform to table VII, and be similar to figure 10.

Table VII Type VI, class 2 earth digging and tamping bar, telegraph

Size number	Dimensions													Weight	Test load
	A		B		C	D		E	F		G	H			
	Mini-mum	Maxi-mum	Mini-mum	Maxi-mum	Mini-mum	Mini-mum	Maxi-mum	Mini-mum	Mini-mum	Maxi-mum	Mini-mum	Maxi-mum	Mini-mum	Mini-mum	Mini-mum
	Inches	Inches	Inches	Inches	Inch	Inches	Inches	Inches	Inches	Inches	Inches	Inch	Pounds	Pounds	
1	82-1/2	85	2-1/16	2-1/8	3/16	1-3/32	1-5/32	7/8	2-1/4	2-5/8	3-7/8	3/16	23	300	
2	95	97	2-1/4	2-1/8	3/16	1-3/32	1-5/32	1-1/4	2-1/4	2-5/8	3-7/8	1/4	25	320	

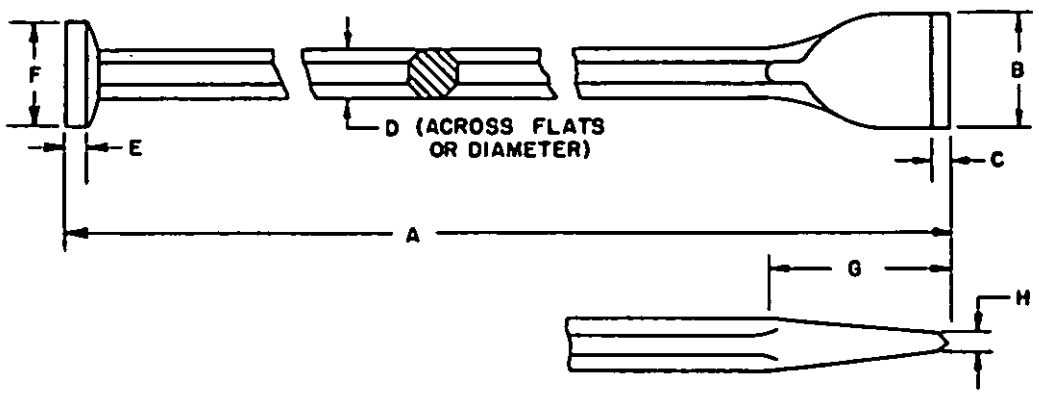


FIGURE 10. Type VI, class 2, earth-digging and tamping bar, telegraph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

3.12 Type VII, earth digging. Type VII bars at one end shall be provided with a suitably formed bit, smoothly finished, and uniformly tapered having a cutting edge ground to a double-beveled edge. The opposite end of the bar shall terminate in a round uniform tapered point. The bar shall withstand the test specified in 4.4.2.6, conform to table VIII, and be similar to figure 11.

Table VIII Type VII earth-digging bar

Size number	Dimensions											Weight	Test load
	A		B		C		D		E	F	G		
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Minimum	Maximum	Minimum	Minimum
	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inch	Inches	Inch	Pounds	Pounds
1	83	85	3-7/8	4-1/8	1- 3/32	1-5/32	2	2-1/2	1/4	3-7/8	1/4	23	300
2	95	97	3-7/8	4-1/8	1- 3/32	1-5/32	2	2-1/2	1/4	3-7/8	1/4	25	250
3	95	97	2-3/8	2-5/8	31/32	1-1/32	1-7/8	2-1/8	1/4	2-1/2	1/4	23	200

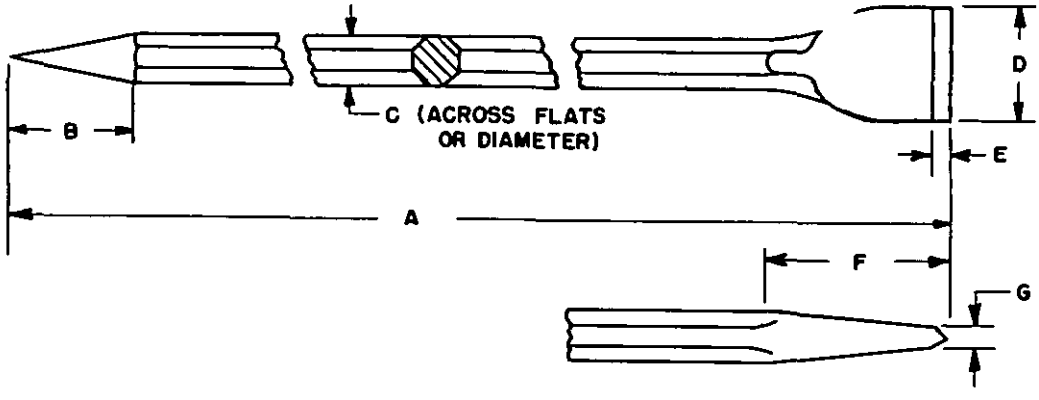


FIGURE 11. Type VII, earth-digging bar.

3.12.1 Hardness. The work ends of the bar shall show a hardness reading of not less than 42 nor more than 52 on the Rockwell C scale (see 4.4.1).

3.13 Type VIII, earth tamping. Type VIII bars at one end shall be provided with a suitably formed bit, smoothly finished, and uniformly tapered to a straight chisel edge. The opposite end shall be bent and provided with a suitable tamping edge. The bar shall withstand the test specified in 4.4.2.6, shall conform to table IX, and be similar to figure 12.

Table IX Type VIII earth-tamping bar

Size number	Dimensions									Weight	Test load
	A		B	C		D	E	F	G	H		
	Minimum	Maximum	±1/32	Minimum	Maximum	±1/2	±1/8	±1/2	±1/2	±1/32	Minimum	Minimum
	Inches	Inches	Inch	Inches	Inches	Inches	Inches	Inches	Inches	Inch	Pounds	Pounds
1	60	62	7/8	3-3/4	4-1/4	3	2	3	3-3/4	1/2	13	100

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:37Z
Check the source to verify that this is the current version before use.

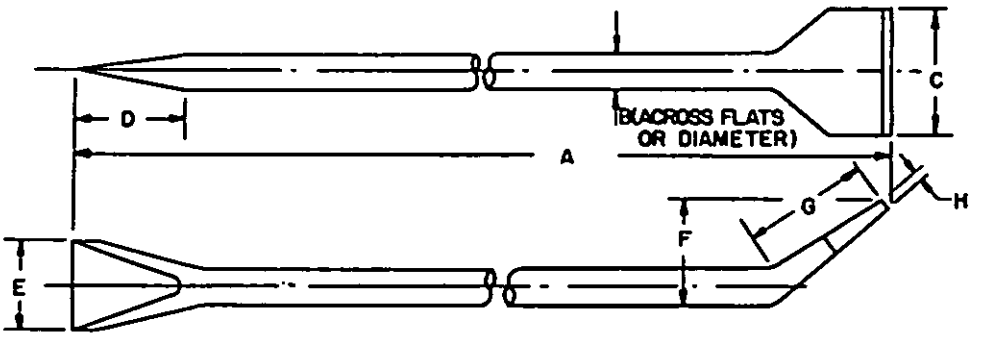


FIGURE 12. Type VIII, earth-tamping bar.

3.13.1 Hardness. The work ends of the bar shall show a hardness of not less than 42 nor more than 52 on the Rockwell C scale (see 4.4.1).

3.14 Type IX, pinch (straight). Type XI bars shall have one end smoothly finished and tapered to a straight chisel edge. The bar shall neither fracture nor show a permanent set after application of the test load specified in 4.4.2.7. The bar shall be of the design and dimensions shown on figure 13.

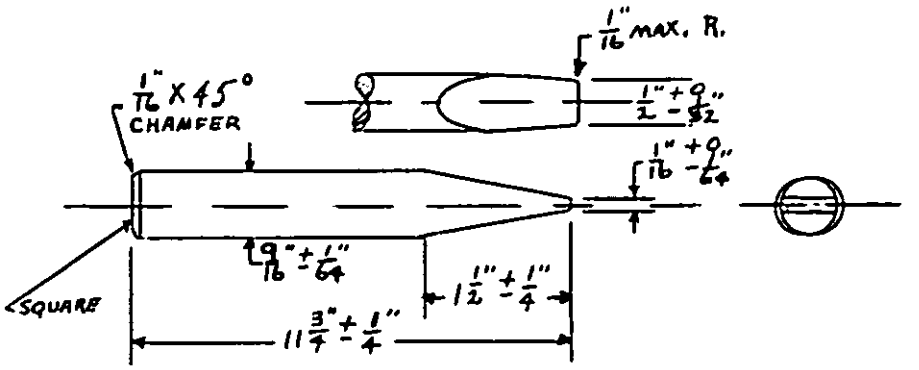


FIGURE 13. Type IX, pinch (straight).

3.14.1 Hardness. The hardness shall be as specified in 3.7.1.

3.15 Workmanship. Workmanship shall be of the highest grade throughout and equal in every respect to good commercial practice. Bars shall be free from any imperfections that may affect their durability or serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table X.

TABLE X, Sampling data

Category	Sample Unit	Inspection Level	Acceptable Quality Level	AQL Expressed In Terms Of	Reference
Visual examination	1 each	II	1.5	Defects per Hundred Units	4.3.1
Dimensional and weight examination	1 each	S-4	1.5	do.	4.3.2
Testing	1 each	S-3	2.5	do.	4.4
Preparation for delivery	One container	S-2	4.0	do.	4.5

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any nonconformance in design, material, finish, coating, construction, workmanship, and marking. Defects are listed in table XI.

TABLE XI. Classification of defects in accordance with MIL-STD-105

Categories	Defects
Critical:	
1	None defined.
Major:	
101	Type, class, and size not as specified.
102	Evidence of rust, laps or cracks; not free from burrs, roughness and forging flash.
104	Ends defective, improperly formed, or not ground as required.
105	Striking end of bar not chamfered or working end not smoothly tapered with a double-beveled chisel edge (type I only).
106	Formed end not square, or chisel edge not flat (type II only).
113	Tamping end (class A only) not smoothly ground or working end not uniformly ground or working end not uniformly tapered with a double-beveled chisel edge (type VI only).
211	Ground surfaces and natural finish surfaces not coated with an oil or grease compound to prevent rust or corrosion.
212	Marking, manufacturer's name or trademark missing, illegible, incorrect, or not permanent.

4.3.2 Dimensional and weight examination. Each sample unit shall be examined for any nonconformance with dimensional and weight requirements.

4.4 Test procedures. Each sample unit shall be tested in accordance with 4.4.1 through 4.4.2.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

4.4.1 Hardness tests. Hardness tests shall be in accordance with method 243 of Fed. Std. No. 151 to determine compliance with 3.6.1, 3.7.1, 3.8.1, 3.9.1, 3.10, 3.11.1, 3.12.1, 3.13.1, and 3.14.1. Except for types II and VI, class 1, the impressions shall be taken 1/2 inch from the end tested. Impressions taken on pinch or wedge point end of type II bars shall be taken within the area specified in table II. Impressions taken on type VI, class 1 bars shall be not less than 1 inch from the cutting end.

4.4.2 Physical test.

4.4.2.1 Type I chisel bars. The sample chisel bars shall be held securely in a vertical position by a vise or clamp, with the striking end of the chisel bar resting on a solid foundation. A round steel bar, at least 3/4 inch in diameter and having a hardness value of 20 to 28 on the Rockwell C scale, shall be held at right angles with the cutting edge of the chisel bar and struck a sufficient number of blows with a heavy hammer to make a cut in the round steel bar at least 1/8 inch deep. Three such cuts shall be made without the cutting edge of the chisel bar chipping or showing undue wear.

4.4.2.2 Type II crowbars. The sample crowbars shall be subjected to the following tests: Two inches of the pointed end (or work end) shall be held securely or supported in a suitable holder, such as a vise, and the test load specified in table II applied midway the handle section in a direction perpendicular to the body. The bar, after being tested, shall meet the requirements of 3.7.

4.4.2.3 Type III pinch bars. The sample pinch bars shall be subjected to the following tests: The entire offset end of the bar (dimension A, table III) shall be rigidly secured by means of a vise or clamp and the test load specified in table III shall be applied to the body 2 inches from the tapered end in a direction perpendicular to the body. The manner of applying the load shall be such as to straighten the offset. After applying the load, the pinch bar shall not take permanent set nor shall the offset end fracture when so tested. Three inches of the tapered end shall be clamped and the bar shall be subjected to the same test except that the load applied shall be one-third the test load for the offset end.

4.4.2.4 Type IV pry bars. The rolling head of the type IV bars shall be rigidly secured by means of a vise or clamp in a manner to apply a load to straighten the angular hook. The test load specified in table IV shall be applied to the body 4-3/4 inches from the tapered end in a direction perpendicular to the body. After applying the load, the pry bar shall not take permanent set and shall not fracture when so tested. The tapered end shall also be subjected to the same test except 4-3/4 inches of the tapered end shall be clamped and the load applied 1 inch from the rolling-head end.

4.4.2.5 Type V wrecking bars. One and one-half inches of the wedge-shaped offset end of the type V bars shall be rigidly secured by means of a vise or clamp, and the test load specified in table V shall be applied to the body at a point 8, 14, 20, 26, 32, 44, or 56 inches from the clamped end, if applicable, in a direction perpendicular to the body. The manner of applying the load shall be such as to straighten the offset. The wrecking bar, after being tested, shall meet the requirements of 3.10.1.1 or 3.10.2.

4.4.2.6 Type VI digging and tamping bars, type VII digging bars, and type VIII tamping bars. Two and one-half inches of the bit or cutting edge of the type VI bars shall be held securely or supported in a suitable holder, such as a vise and the test load specified in table VI for type VI, class 1, table VII for type VI, class 2; table VIII for type VII; and table IX for type VIII applied midway the length of the bar body in a direction perpendicular to the body. After applying the test load, the bar shall not take a permanent set, fracture or fail otherwise. The opposite end shall also be subjected to the same test except that 4-1/2 inches of the taper or head end shall be clamped and the load applied 10 inches from the bit or cutting edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

4.4.2.7 Type IX, pinch bar (straight). One inch of the pointed end shall be held securely or supported in a suitable holder, such as a vise, and a test load of 35 pounds applied midway the handle length in a direction perpendicular to the body. After being tested, the bar shall meet the requirements of 3.13.1.

4.5 Inspection of preparation for delivery. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5. Defects shall be scored in accordance with table XII.

TABLE XII. Classification of preparation for delivery defects.

Examine	Defects
Marking (exterior and interior)	Omitted; incorrect; illegible, improper size, location, sequence, or method of application.
Contents	Quantities not as specified.
Containers	Not the kind specified.
Materials	Any component missing, or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate strapping; distortion of container.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, and packing. Unless otherwise specified (see 6.1), the bars shall be preserved, packaged, and packed in accordance with MIL-H-15424. The levels of preservation and packaging shall be A or C and the level of packing A, B, or C, as specified (see 6.1). If level B packaging is required see 6.2.

5.2 Marking.

5.2.1 Civil agencies. In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 Military activities. In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with MIL-H-15424.

6. NOTES

6.1 *Ordering data. Purchasers should select the preferred options permitted herein and* include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) *Type, class, and style (as applicable) of bars required (see* 1.2.1).
(c) Size number and length of bars required (see applicable table and 3.10.2).
(d) Selection of applicable level of preservation, packaging, and packing required (see 5.1).

GSA DC 68-9666

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:37Z
Check the source to verify that this is the current version before use.