GGG-B-110a
September 14, 1966

SUPERSEDING
Int. Fed. Spec. GGG-B-00110 (GSA-FSS)
February 19, 1964

FEDERAL SPECIFICATION

BAR, COMBINATION PRY AND SCRAPER

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers a combination or multipurpose bar used for various prying and scraping applications.

1.1.1 *Federal specification coverage.* This specification does not cover all varieties of combination pry and scraper bars but is intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Types.* The bars shall be of the following types as specified (see 6.1):

Type I—Claw ends.
Type II—Smooth ends.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Standards:

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Test Method Std. No. 151—Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-H-15424—Hand Tools, Packaging Of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. The material used in the manufacture of bars shall be of high carbon steel having a carbon content of not less than 0.60 percent carbon for type I bars and not less than 0.95 percent carbon for type II bars. The chemical composition of the material and the heat treatment employed shall be such as to produce bars to withstand the tests specified in 4.4. Certification of carbon content shall be as required in 4.4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

3.2 Finish. The bars shall be free from burrs, roughness, and oxide scale.

3.3 Coating. The body of the bars shall be either lacquered, enameled, or painted.

3.4 Identification marking. Each bar shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.5 Type I. Type I bars shall have a "V" type nail notch or slot in each end. The hand gripping area of the body shall have smooth, rounded edges. An eye-type nail slot shall be provided in the body of the tool and shall be located within four inches from the chisel end. This nail slot shall be designed to extract nails ranging in size from 2 through 10 penny. Both ends of the bar shall have sharp edges suitable for scraping. The head end shall be bent at approximately 90° to the longitudinal axis. Type I bars shall withstand the bending test as specified in 4.4.2 and the nail pulling test in 4.4.4.

3.6 Hardness. Bars shall have a hardness reading of not less than 38 nor more than 48 on the Rockwell "C" scale when tested as specified in 4.4.1.

3.7 Type I bars shall conform to the dimensions of, and shall be similar to figure 1.

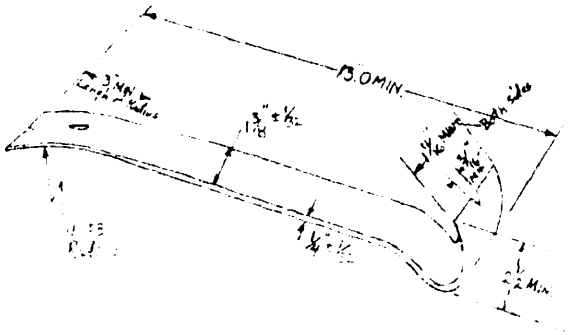


FIGURE 1. Type I, claw ends

3.8 Type II bars. Type II bars shall have smooth cutting edges across each end. Bars shall be of flat stock with the body edges slightly rounded and shaped to provide a suitable handgrip. Each end shall be tapered to form a sharp edge suitable for scraping. One end shall be straight and the opposite end bent at 90° to the longitudinal axis. A hole or configuration suitable for pulling nails or tacks shall be provided within two inches from the end having the 90 bend.

3.9 Hardness. Bars shall have a hardness reading of not less than 52 nor more than 60 on the Rockwell "C" scale when tested as specified in 4.4.1.

3.10 Type II bars shall conform to the dimensions of, and shall be similar to figure 2.

3.11 Workmanship. Workmanship shall be of the highest grade throughout and equal in every respect to good commercial practice. Bars shall be free from rust, burrs, fins, or any imperfections which may impair their serviceability or durability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification

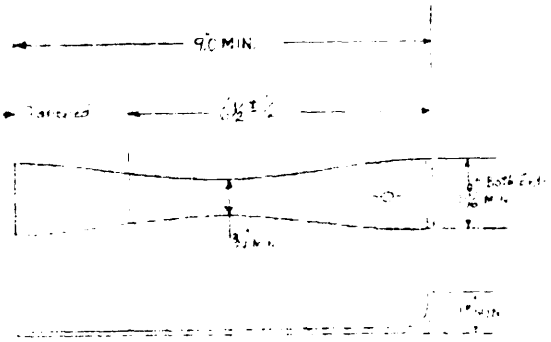


FIGURE 2. Type II, smooth ends

Note: The 6-1/2 in. length is 1/8 ± 1/64 in. thick; the remaining 2-1/2 in. portion tapers in thickness from 1/8 ± 1/64 in. down to 0.040 ± 1/64 in. near the point.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

TABLE I. *Sampling data*

Category	Sample unit	Inspection level	Acceptable quality level	AQL expressed in terms of	Reference
Visual examination	1 ea.	II	4.0	Defects per hundred units	4.3.1
Dimensional examination	1 ea.	S-4	1.5	Defects per hundred units	4.3.2
Testing	1 ea.	S-3	1.0	Percent defective	4.4
Preparation for delivery	One container	S-2	4.0	Defects per hundred units	4.5

where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 *Inspection of materials and components.* In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 **Sampling procedures.** Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table I.

4.3 Examination.

4.3.1 *Visual examination.* Each sample unit shall be examined for any nonconformance in design, material, finish, coating, workmanship, and marking.

4.3.2 *Dimensional examination.* Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 **Testing.** Each sample unit shall be tested in accordance with 4.4.1, 4.4.2, and 4.4.4.

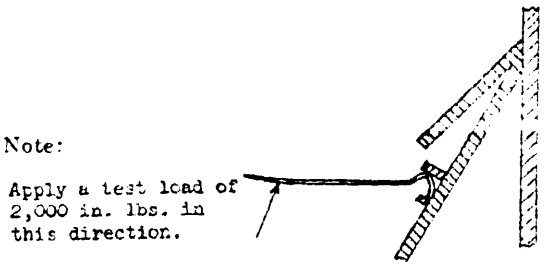


FIGURE 3. Fixture for testing hooked end

4.4.1 *Hardness tests.* Hardness tests shall be in accordance with method 243.1 of Fed. Test Method Std. No. 151 to determine compliance with 3.6 and 3.9. The impressions shall be taken 1/2 inch from the end tested.

4.4.2 *Type I, claw ends.* Type I bars shall be positioned, secured, and tested in clamping fixtures as shown in figures 3 and 4. After the test loads specified for each test have been applied, the bar shall be examined and shall show no evidence of permanent set or fracture.

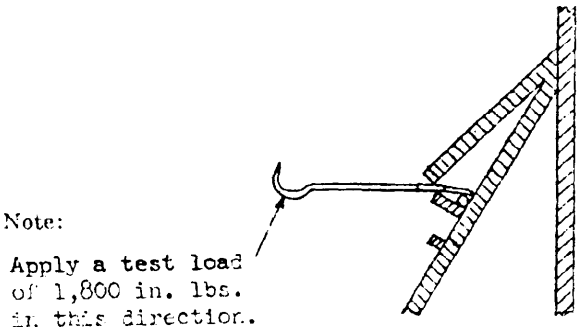


FIGURE 4. Fixture for testing straight end

4.4.3 *Carbon content.* The supplier shall furnish a certificate of compliance and analysis certifying that the chemical composition of each lot or batch of steel used in the end item meets the applicable carbon requirements as specified in 3.1.

4.4.4 *Nail pulling test for type I bars.* Two-penny common nails shall be driven into sound boards of a suitable soft wood (such as yellow pine) not less than 5/8 inch thick. The nails shall be driven into the board until their heads are approximately 1/8 inch from being flush. The "V" slots on each end, and the eye-type nail puller in the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

body of the type I bars shall pull at least 2 two-penny common nails each (total of at least 6). Failure to pull nails as specified shall be cause for rejection.

4.5 **Inspection of preparation for delivery requirements.** An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5. Defects shall be scored in accordance with table II. For examination of interior packaging, the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

TABLE II. *Classification of preparation for delivery defects*

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling.
	Distortion of container.

5. PREPARATION FOR DELIVERY

5.1 **Preservation, packaging, and packing.** Unless otherwise specified (see 6.1), the bars shall be preserved, packaged, and packed in accordance with MIL-H-15424. The levels of preservation and packaging shall be A or C and the level of packing A, B, or C, as specified (see 6.1). If level B packaging is required see 6.2.

5.1.1 As part of the requirements of section 5 of this specification, table III is considered as part of and used in lieu of that portion of table I of MIL-H-15424 covering bars:

TABLE III

Col. 1	Col. 2	Col. 3	Col. 4	Col. 5	Col. 6
Bar: Combination pry and scraper	P-1	I	12		4

5.2 **Marking.**

5.2.1 *Civil agencies.* In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 *Military activities.* In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(*a*) Title, number, and date of this specification.
(*b*) Type of bars required (see 1.2.1).
(*c*) Levels of packaging and packing required (see 5.1 and 5.2).
(*d*) Marking, if different (see 5.3).

6.2 **For civil agency procurement.** When level B packaging is required for civil agency procurement, the requirements in 5.1. level A packaging shall apply.

6.3 **Illustrations.** The illustrations shown herein are for the convenience of identification and are not intended to preclude the purchase of bars which are otherwise in accordance with this specification.

DOD coordination has been waived.

Preparing activity:
GSA-FSS

U.S. GOVERNMENT PRINTING OFFICE: 1966 O-247/16

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.