GGG-J-65a
April 26, 1965

SUPERSEDING
Int. Fed. Spec. GGG-J-0065 (GSA-FSS)
May 15, 1964

FEDERAL SPECIFICATION

JOINTER, BRICK

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 This specification covers one type of brick jointer for masonry use.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

Fed. Test Method Std. No. 151—Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-H-15424—Hand Tools; Packaging of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. The brick jointers shall be made from round bar stock of a high carbon steel which will assure high performance tools.

3.2 Hardness. The hardness of the working surfaces of the brick jointers shall be 42-48 on the Rockwell "C" scale (see 4.4.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.3 Identification marking. Each brick jointer shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.4 Finish. The brick jointers shall be smoothly finished, free from scale, burrs, and sharp edges in accordance with good commercial practices.

3.5 Illustration. The illustration shown herein is for the convenience of identification, and is not intended to preclude the purchase of brick jointers which are otherwise in accordance with this specification.

3.6 Brick jointers. Each brick jointer shall comply with the requirements of table I and also shall be in substantial agreement with figure 1.

TABLE I—*Detail requirements*

A	B	C	D	E
Stock ± 1/8	Overall length ± 1	Square, across flats (minimum)	Diameter (minimum)	Minimum
Inch 5/8	*Inches* 10	*Inch* 1/8	*Inch* 1/8	*Inches* 2-1/2

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

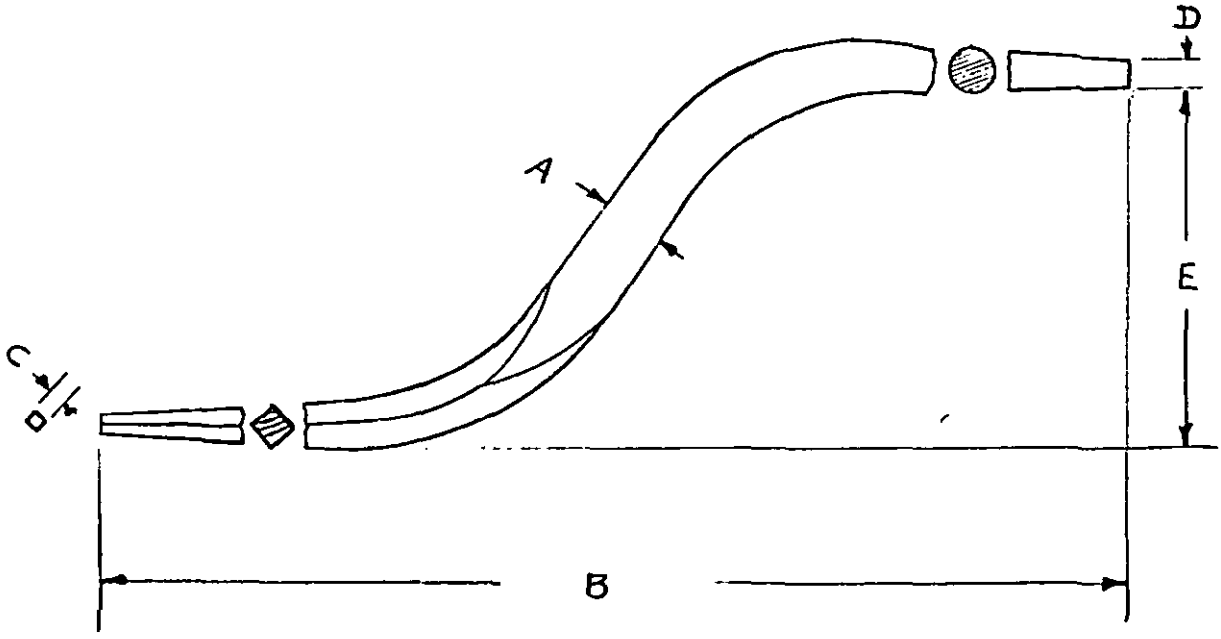


FIGURE 1. Brick jointer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

TABLE II—*Sampling data*

Category	Sample unit	Inspection level	Acceptable quality level	AQL expressed in terms of	Reference
Visual examination	1 ea.	II	6.5	Defects per hundred units	4.3.1
Dimensional examination ...	1 ea.	S-4	2.5	Defects per hundred units	4.3.2
Testing	1 ea.	S-3	1.0	Percent defective	4.4
Preparation for delivery	One container	S-2	4.0	Defects per hundred units	4.5

4.1.1 *Inspection of materials and components.* In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table II.

4.3 Examination.

4.3.1 *Visual examination.* Each sample unit shall be examined for any nonconformance in design, material, finish, workmanship, and marking.

4.3.2 *Dimensional examination.* Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1.

4.4.1 *Hardness test.* Each sample unit shall be tested for hardness in accordance with method 243.1 of Fed. Test Method Std. No. 151.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the packaging, packing, and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with table III. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

TABLE III—*Classification of preparation for delivery defects*

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing, or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.

5. PREPARATION FOR DELIVERY

(For civil agency procurement, the definitions and application of levels of packaging and packing shall be in accordance with Fed. Std. No. 102.)

5.1 Preservation, packaging, packing, and marking. Unless otherwise specified (see 6.1), the jointers shall be preserved, packaged, and packed in accordance with MIL-H-15424. The level of preservation and packaging shall be A or C and the level of packing, A, B, or C as specified (see 6.1).

5.1.1 As part of the requirements of section 5 of this specification, the following is considered as part of table I of MIL-H-15424:

Column 1	Column 2	Column 3	Column 4	Column 6	Column 7
Jointer: Brick	P-1	I	6	6	86

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

5.2 Marking.

5.2.1 *Civil agencies.* In addition to markings required by the contract or order, the unit packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 *Military activities.* In addition to markings required by the contract or order, the unit packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 **Ordering data.** Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.
(*b*) Applicable levels of preservation, packaging and packing (see section 5).
(*c*) Marking, if different (see 5.2).

6.2 **Transportation description.** Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Tools, not otherwise indexed by name.
Carload minimum weight 30,000 pounds.

Motor:

Tools, hand, not otherwise indexed, other than power.
Truckload minimum weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

DOD coordination has been waived.

Preparing Activity:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.