FEDERAL SPECIFICATION

RESPIRATOR ASSEMBLIES: AIR LINE, WITH FACEPIECE (SUPPLIED AIR)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal agencies.

The complete requirements for procuring the masks described herein shall consist of this document and the issue in effect of GGG-M-125/GEN.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the specific requirements for half-mask and full-mask facepieces designed for use with supplied air.

Type I - Air line respirator.

Model 1 - Constant flow valve regulator.
Model 2 - Pressure-demand valve regulator.
Model 3 - Demand valve regulator.

Style A - Half-mask facepiece.
Style B - Half Mask facepiece (for use under welder helmet).
Style C - Full-mask facepiece.

Type II - Air line respirator with 3-minute (minimum self-contained escape apparatus).

2. APPLICABLE DOCUMENTS

2.1 Latest issue of GGG-M-125/GEN and documents referenced therein, and the additional documents specified herein.

Federal Specification:

BB-A-1034 - Air, Compressed, for Breathing Purposes.

Military Standard:

MIL-STD-101 - Color Code for Pipelines and for Compressed Gas Cylinders.

FSC 4240

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:37Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Approval and certification. (See GGG-M-125/GEN.)

3.2 Design.

3.2.1 Type I, styles A, B, and C. Type I, styles A, B, and C masks shall consist of the following principal parts (see figures 1 and 2):

(a) An air line hose (see 3.2.1.8).
(b) A quick-release coupling (see 3.2.1.6).
(c) Air flow control device, models, 1, 2, or 3 as specified (see 3.2.1.5).
(d) When required, a filter cartridge assembly (see 3.2.1.9).
(e) A length of breathing tube (see 3.2.1.4).
(f) When required, a belt for attaching hose to wearer (see 3.2.1.7).
(g) A facepiece (see 3.2.1.1.1 through 3.2.1.1.3).
(h) A head harness (see 3.2.1.2).
(i) An exhalation valve in the facepiece (see 3.2.1.3).

3.2.1.1 Facepiece.

3.2.1.1.1 Type I, style A half-mask facepiece. Type I, style A facepiece shall be of a design that covers the mouth and nose, and forms a gas-tight seal with the face, leaving the eyes uncovered (see figure 1).

3.2.1.1.2 Type I, style B half-mask facepiece. Type I, style B facepiece shall be of a design that covers the mouth, and nose, and forms a gas-tight seal with the face, leaving the eyes uncovered (see figure 1). The design shall be such as to permit the wearer to work in a welder's helmet conforming to GGG-H-211.

3.2.1.1.3 Type I, style C full facepiece. Type I, style C facepiece shall be of a design that covers the entire face, and forms a gas-tight seal with the face (see figure 2). The facepiece shall be provided with one or two lenses conforming to GGG-M-125, and of sufficient size and shape to provide a satisfactory field of vision for persons of widely varying facial shapes and sizes. The lenses shall form a gas-tight seal with the facepiece, and shall be easily replaceable without the use of special tools and cements.

3.2.1.2 Head harness. The head harness shall be of the type supplied on the respirator when approved by the Bureau of Mines (BM) or when certified by BM/NIOSH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

3.2.1.3 Exhalation valve. The exhalation valves shall be securely mounted on the facepiece and shall be so designed as to permit passage of the exhaled air and prevent entrance of ambient air.

3.2.1.4 Breathing tube. A noncollapsing, flexible breathing tube of convenient length shall be furnished to connect the facepiece air inlet opening to the airflow control device when it is located at the wearer's waist. Tubes complete with fittings shall show no signs of leakage when subjected to the water immersion test specified in GGG-M-125/GEN.

3.2.1.5 Models 1, 2, and 3. Model 1 air flow control device shall be a fixed orifice valve. Model 2 air flow control device shall be a pressure-demand flow regulator valve, designed to be used where cylinders of compressed air serve as the air line source. Model 3 air flow control device shall be a demand valve regulator, designed to be used where air supplied to the wearer is from a compressor. The air flow control devices shall be provided with a quick-release coupling, and automatic shutoff mechanism as specified in 3.2.1.6 and equipped to attach to a belt (see 3.2.1.7). The valve shall have a safety adjustment so arranged that accidental bumping of the valve shall not result in a sudden flow of air or in a sudden stoppage of air flow.

3.2.1.6 Quick-release coupling and automatic shutoff mechanism. The quick-release coupling and automatic shutoff mechanism shall provide a manually operated means for severing the air line from the mask assembly, and at the same time cutting off the air supply automatically. The quick-release coupling shall function without the aid of tools and shall sustain a tight union not readily broken by normal handling. The automatic shutoff mechanism shall automatically open the air supply when the coupling is connected. The coupling shall be readily attachable to air line hose without recourse to fittings other than those supplied with the assembly.

3.2.1.7 Belt. When specified (see 6.2), each type I mask shall be furnished with a suitable belt. The belt shall have a slide for ready adjustment of belt size. The belt shall support the air flow control device and shall be furnished unattached as part of the assembly.

3.2.1.8 Air line hose. An air line hose, with a quick-release coupling attached to inlet end of the hose, shall be furnished to connect the respirator fixed orifice or air regulating valve to the air supply system. The hose assembly and quick-release coupling shall be of the type used on the respirator when it was approved by the BM or when it was certified by BM/NIOSH. Unless otherwise specified (see 6.2), the length of hose shall be a nominal 25 feet.

3.2.1.9 Filter cartridge assembly. When specified (see 6.2), a filter cartridge assembly shall be provided and equipped for fastening to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

the belt. The filter receptacle shall be readily opened or detached for ease in replacement of the filter cartridge without the use of tools. The filter receptacle shall be of such shape and dimensions as to accommodate a chemical cartridge specified in 3.2.1.9.1. One side of the filter receptacle shall be securely attached to the flexible breathing tube. To the other side of the filter receptacle shall be fastened an air flow control device, to which is attached a quick-release coupling combined with an automatic shutoff mechanism.

3.2.1.9.1 Chemical cartridge. When specified (see 6.2), the chemical cartridge shall provide protection against low concentration of organic vapors.

3.2.2 Type II. The type II air line respirator assembly shall be designed to provide the user with respirable atmosphere from a positive pressure air supply, and a minimum of 3 minutes emergency air supplied from an air cylinder which is an integral part of the respirator for escape purposes (see figure 3). Type II shall consist of the following principal parts:

(a) A facepiece (see 3.2.2.1).
(b) An air line hose (see 3.2.1.8).
(c) A pressure demand flow regulator valve when required (see 3.2.1.5).
(d) A quick-release coupling (see 3.2.1.9).
(e) A length of breathing tube (see 3.2.1.4).
(f) A harness for attaching apparatus to wearer (see 3.2.2.2).
(g) A compressed air cylinder and valve assembly with gage (see 3.2.2.3 and 3.2.2.3.1).

3.2.2.1 Facepiece. The facepiece shall be so designed to cover the entire face, and shall be so constructed to assure a gas-tight seal with the face. Unless otherwise specified (see 6.2), single lense or double lenses shall be used. The lens(es) shall be easily replaceable without special tools or cements. Lens(es) shall meet requirements on GGG-M-125/GEN.

3.2.2.2 Harness assembly. The apparatus shall be provided with an adjustable fit harness comfortably supporting the apparatus securely on the wearer. A certificate of compliance shall be submitted verifying that the straps meet the 175 pound requirement.

3.2.2.3 Compressed cylinders. An appropriate cylinder of compressed breathing air or compressed breathing oxygen conforming to BB-A-1034, having a shutoff valve and pressure gage attached, shall be furnished as a component part of the apparatus covered by this specification. Cylinders shall be marked with the words "Breathing Air - For Egress Only," and the quantity of breathing air contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

3.2.2.3.1 Color coding of cylinders. In addition to the requirements of 3.2.2.3, cylinders for military agencies shall be color coded for cylinder identification and titled to show the exact identification of the material contained in accordance with the provisions of MIL-STD-101.

3.3 Sanitization. Type I and type II shall conform to the requirements for masks specified in GGG-M-125/GEN.

3.4 Spare parts. When specified (see 6.2), spare parts or accessories shall be furnished.

3.5 Interchangeability.
3.6 Instruction.
3.7 Marking.
3.8 Workmanship.

} Requirements in accordance with GGG-M-125/GEN.

4. QUALITY ASSURANCE PROVISIONS

The quality assurance provisions shall conform to GGG-M-125/GEN, and the provisions specified herein.

4.1 Examination. Respirators sampled in accordance with GGG-M-125/GEN shall be examined to verify compliance with this specification. Assemblies shall be examined for defects listed in table I.

Table I. Classification of defects

Categories	Defects
Major	
101	Type and style not as specified.
102	BM/NIOSH approval number missing.
103	Principal parts missing.
104	Chemical cartridge not as specified when required.
105	Spare parts missing when specified.
106	Instruction missing.
107	Poor workmanship.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:37Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY. (In accordance with GGG-M-125/GEN)

6. NOTES

6.1 Intended use.

6.1.1 Type I air line respirators. Type I air line respirators styles A, B, and C will give protection to the respirator organs of the wearer from concentrations of toxic vapors, dusts, metal fumes, and mists in concentrations that are not immediately dangerous to life or health.

6.1.2 Type II respirators. Type II respirator is a hose line unit designed to give the wearer clean, respirable air from an air supply through a length of air line hose. It also includes a 3-minute minimum supply of air, from a portable air cylinder to enable the wearer to escape from a toxic atmosphere that is immediately dangerous to life when the respirable air from the air line is interrupted.

6.2 Ordering data. Purchasers should select the preferred options offered herein and include the following data in procurement documents:

(a) Title, number, and date of this specification.
(b) Title and date of general specification GGG-M-125.
(c) Type, model, and style of respirator required (see 1.2 and 3.2).
(d) If belt for type I mask is required (see 3.2.1.7).
(e) If length of air line hose 25 feet is different (see 3.2.1.8).
(f) If chemical cartridge is required (see 3.2.1.9 and 3.2.1.9.1).
(g) If a special lens configuration is required (see 3.2.2.1).
(h) If spare parts are required (see 3.4).
(i) If lot size is different (see GGG-M-125/GEN).
(j) Level of packing and packaging required (see GGG-M-125/GEN).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

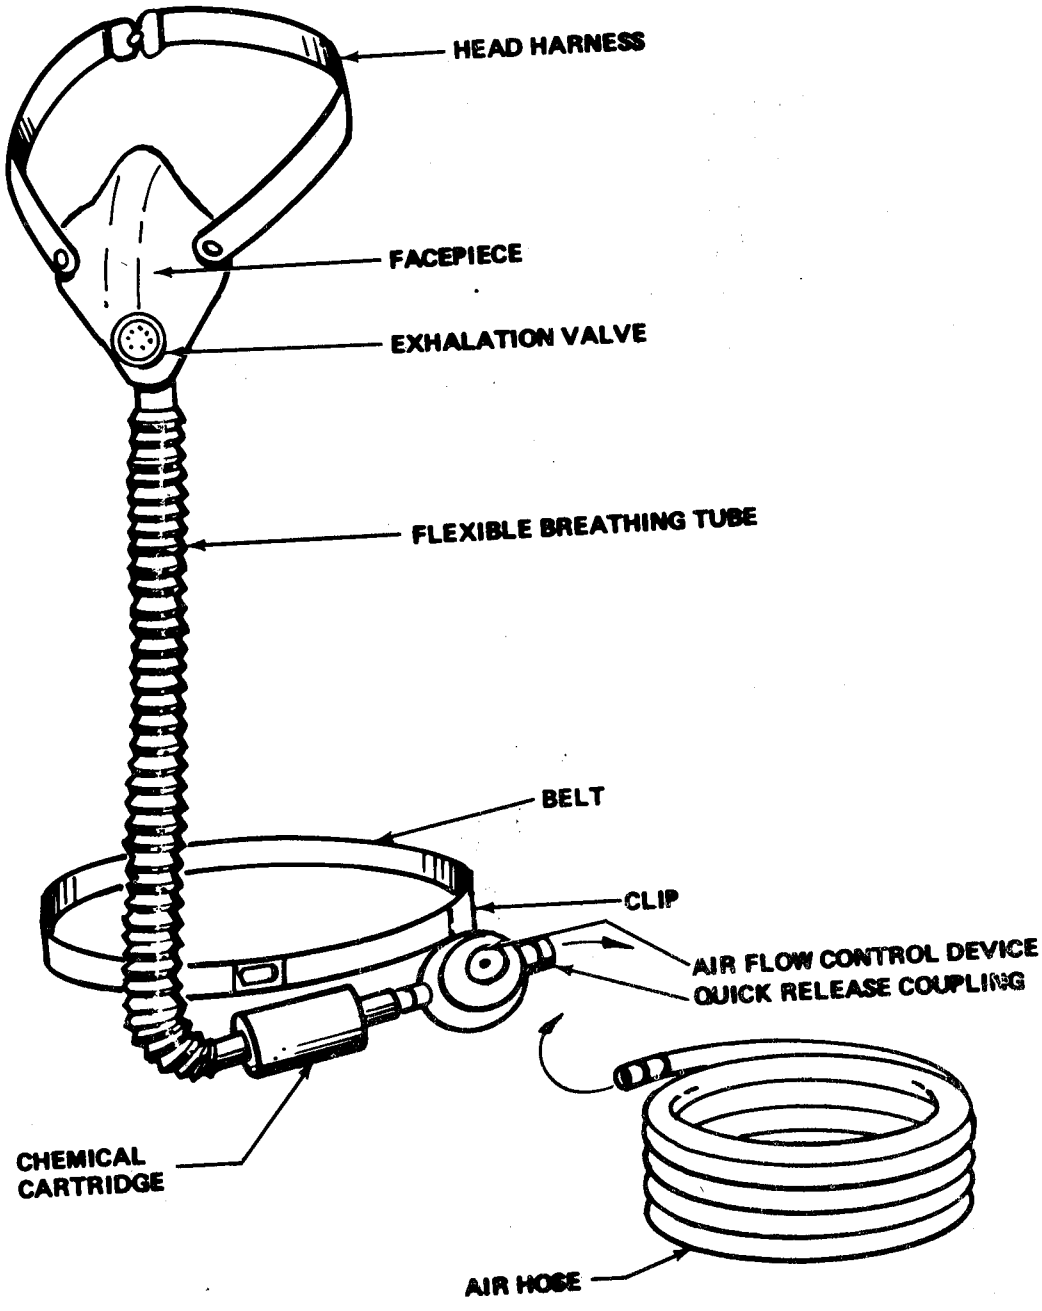


Figure 1. Type I, styles A and B airline masks.
(For illustrative purposes only.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

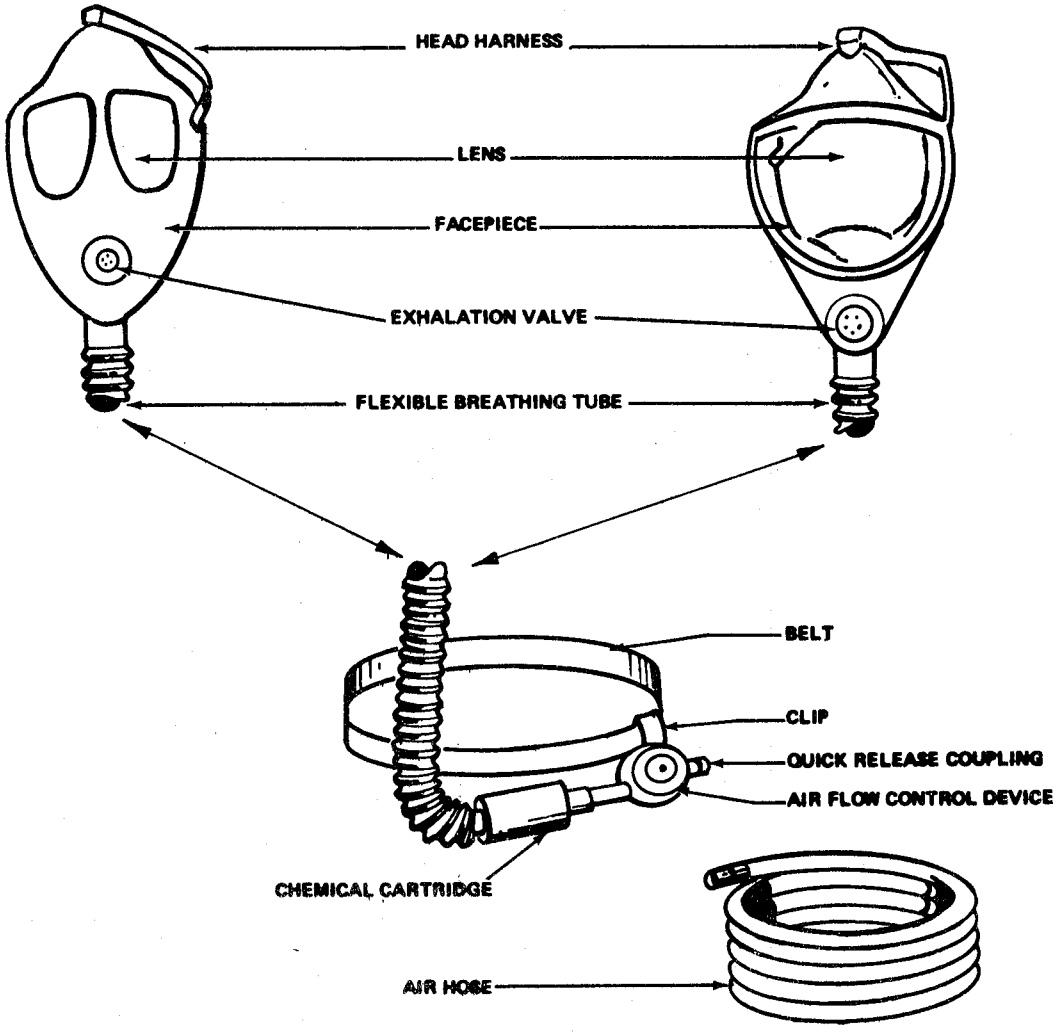


Figure 2. Type I, style C, airline mask.
(For illustrative purposes only.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

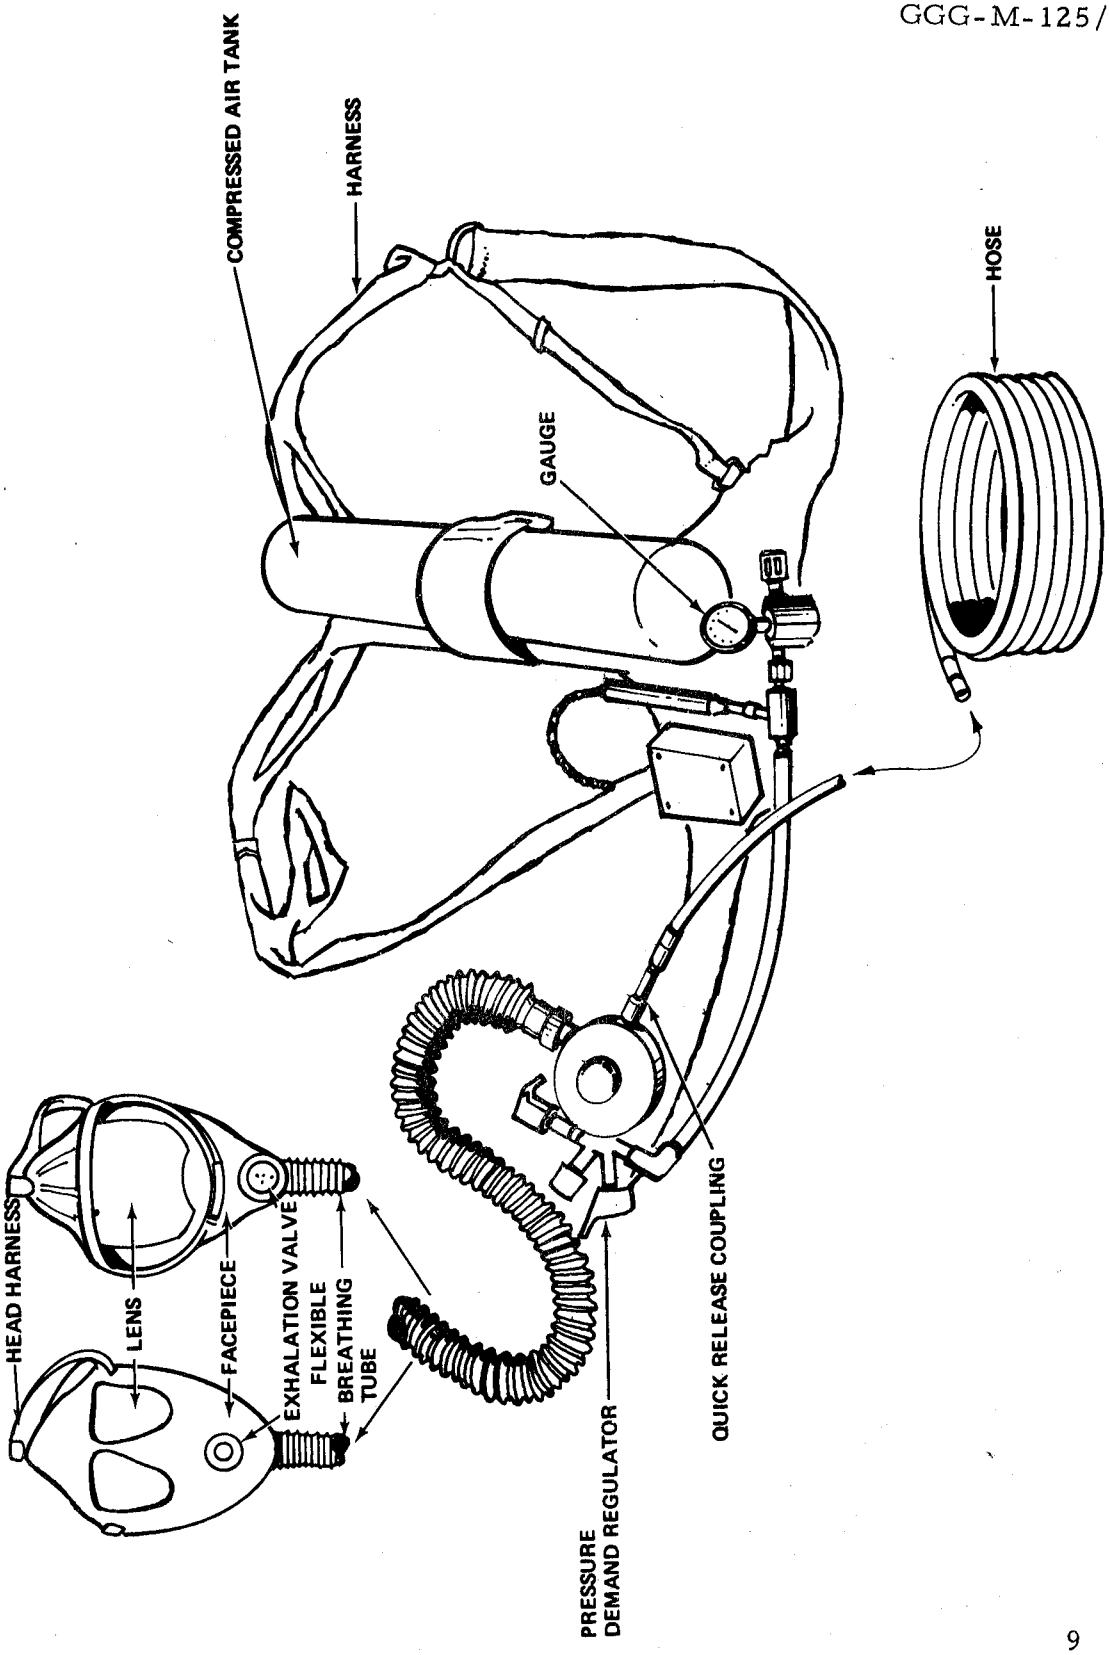


Figure 3. Type II respirator.
(For illustrative purposes only.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - MU
Navy - YD
Air Force - 84

Review activities:

Army - MD
Navy - MC

User activities:

Navy - SH, CG

Civil Agency Coordinationg Activity:

GSA - FSS

Preparing activity:

Navy - YD

Project No. 4240-0313

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.