FEDERAL SPECIFICATION

RESPIRATOR ASSEMBLIES: AIR LINE, WITH DISPOSABLE HOOD (SUPPLIED AIR)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal agencies.

This specification forms a part of the latest issue of GGG-M-125/GEN.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the specific requirements for a respirator with a disposable hood and designed for use with continuous flow of supplied air.

1.2 Classification.

1.2.1 Type and models. Respirator assemblies covered by this specification shall be one type with the following models as specified (see 6.2):

Model 1 - Respirable compressed air regulating control unit.
Model 2 - Respirable compressed air regulation control unit.
Model 3 - Respirable compressed air heating control unit.
Model 4 - Respirable compressed air cooling and heating control unit.

2. APPLICABLE DOCUMENTS

Latest issue of GGG-M-125/GEN, GGG-M-125/2, GGG-M-125/10, and applicable documents referenced therein.

3. REQUIREMENTS

3.1 Approval and certification. (See GGG-M-125/GEN)

3.2 Design. Models 1, 2, 3, and 4 vest and hood respirator assemblies shall be of such a size and design to provide protection to the neck, shoulders, and head when worn by a person of average features. The hood shall be a clear plastic of sufficient size to allow hard hat to be worn. Sound absorption control to reduce noise level to 80 dBA in accordance with 30 CFR, part 11, shall be provided.

FSC 4240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

3.3 Principal parts. Models 1, 2, 3, and 4 vest and hood respirator assemblies shall consist of the following principal parts (see figure 1):

(a) A positive pressure air supply system of respirable air (air supply source not covered by this detailed specification (see GGG-M-125/10)).
(b) An air line hose (see 3.3.3).
(c) A quick-release coupling (see 3.3.4).
(d) An air flow and temperature control unit (see 3.3.6).
(e) A breathing tube (see 3.3.2).
(f) An arrangement for attaching hose to an air regulator to wearer (see 3.3.5).
(g) An inflatable plastic disposable hood and synthetic nylon vest (see 3.3.1).

3.3.1 Vest and hood. The vest shall be made of vinyl-coated nylon, fabricated to cover the chest, back, and the upper part of arms. The opening for the arms and the chest shall be elasticized for a snug fit. The vest shall have a rigid ring around the neck opening for attaching the inflatable hood and a fitting for attaching a breathing tube. The disposable hood shall be made of a flexible plastic film with a 9-inch square polyester film facepiece sewn in the front for better visibility (see figure 1). The facepiece shall be capable of receiving a clear self-adhering protective shield to prolong the life of the hood. When inflated, the hood shall be of sufficient size to allow the average person to wear a hard hat without functional interference with either hard hat or hood.

3.3.2 Breathing tube. Breathing tube shall conform to the requirements of GGG-M-125/2.

3.3.3 Air line hose. Air line hose with quick-release couplings shall conform to the requirements for hose specified in GGG-M-125/2.

3.3.4 Quick-release coupling and automatic shutoff mechanism. Quick-release coupling and automatic shutoff mechanism shall conform to the requirements specified in GGG-M-125/2.

3.3.5 Belt. Belt for attaching air control assembly to waist shall conform to the requirements of GGG-M-125/2.

3.3.6 Air flow and temperature control unit. Models 1, 2, 3, and 4 air flow and temperature control units shall conform to models 1, 2, 3, and 4 specified in GGG-M-125/2 respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

3.4 Laundering. The vest part of the respirator assembly shall be capable of withstanding the laundering test specified in GGG-M-125/GEN, without any signs of damage or shrinking of material.

3.5 Spare parts.

3.5.1 Disposable hoods. Unless otherwise specified (see 6.2), 12 disposable hoods shall be furnished with each respirator assembly.

3.5.2 Protective shield. Unless otherwise specified (see 6.2), 20 self-adhering clear protective shields shall be furnished with each respirator assembly.

3.6 Interchangeability.

3.7 Instructions.

3.8 Marking.

3.9 Workmanship.

} In accordance with GGG-M-125/GEN.

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance provisions shall be in accordance with requirements of GGG-R-125/GEN and the additional requirements specified herein.

4.2 Examination. Respirators selected in accordance with GGG-M-125/GEN shall be examined for the defects listed in table I.

Table I. Examination of defects

Categories	Defects
Major	
101	Model not as specified.
102	BM/NIOSH approval number missing.
103	Principal parts missing.
104	Spare parts missing.
105	Marking not as specified.
106	Material not new.
107	Poor workmanship.

4.3 Tests. Respirators selected in accordance with GGG-M-125/GEN shall be subjected to the tests in 4.3.1, 4.3.2, and 4.3.3.

4.3.1 Performance. Sample respirator when worn and used with a continuous air supply, according to manufacturer's instructions, shall be checked to determine if the requirements of 3.3.1 have been met. Failure to conform shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

4.3.2 Air flow and temperature control test. Sample respirators of models 1, 2, 3, and 4 respirators as specified (see 6.2), shall conform to the respective tests for air flow and temperature control specified in GGG-M-125/2.

4.3.3 Laundering. The vest portion of the respirator shall be laundered in accordance with GGG-M-125/GEN

5. PREPARATION FOR DELIVERY. In accordance with GGG-M-125/GEN.

6. NOTES

6.1 Intended use. Respirators covered in the specification are intended to protect the respiratory organs of the wearer from toxic vapors, dusts, metal fumes, and mists in concentrations that are not immediately dangerous to life. The unit's hood will be disposed of when no longer usable. The inflatable disposable hood is intended to provide sufficient room for wearing of a hard hat.

6.2 Ordering data. Purchasers should select the preferred options offered herein and include the following data in procurement documents:

(a) Title, number, and date of this specification.
(b) Model respirator required (see 1.2.1).
(c) If number of disposable hoods required is different (see 3.5.1).
(d) If the number of protective shields is different (see 3.5.2).
(e) Level of packing and packaging required (see GGG-M-125/GEN).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

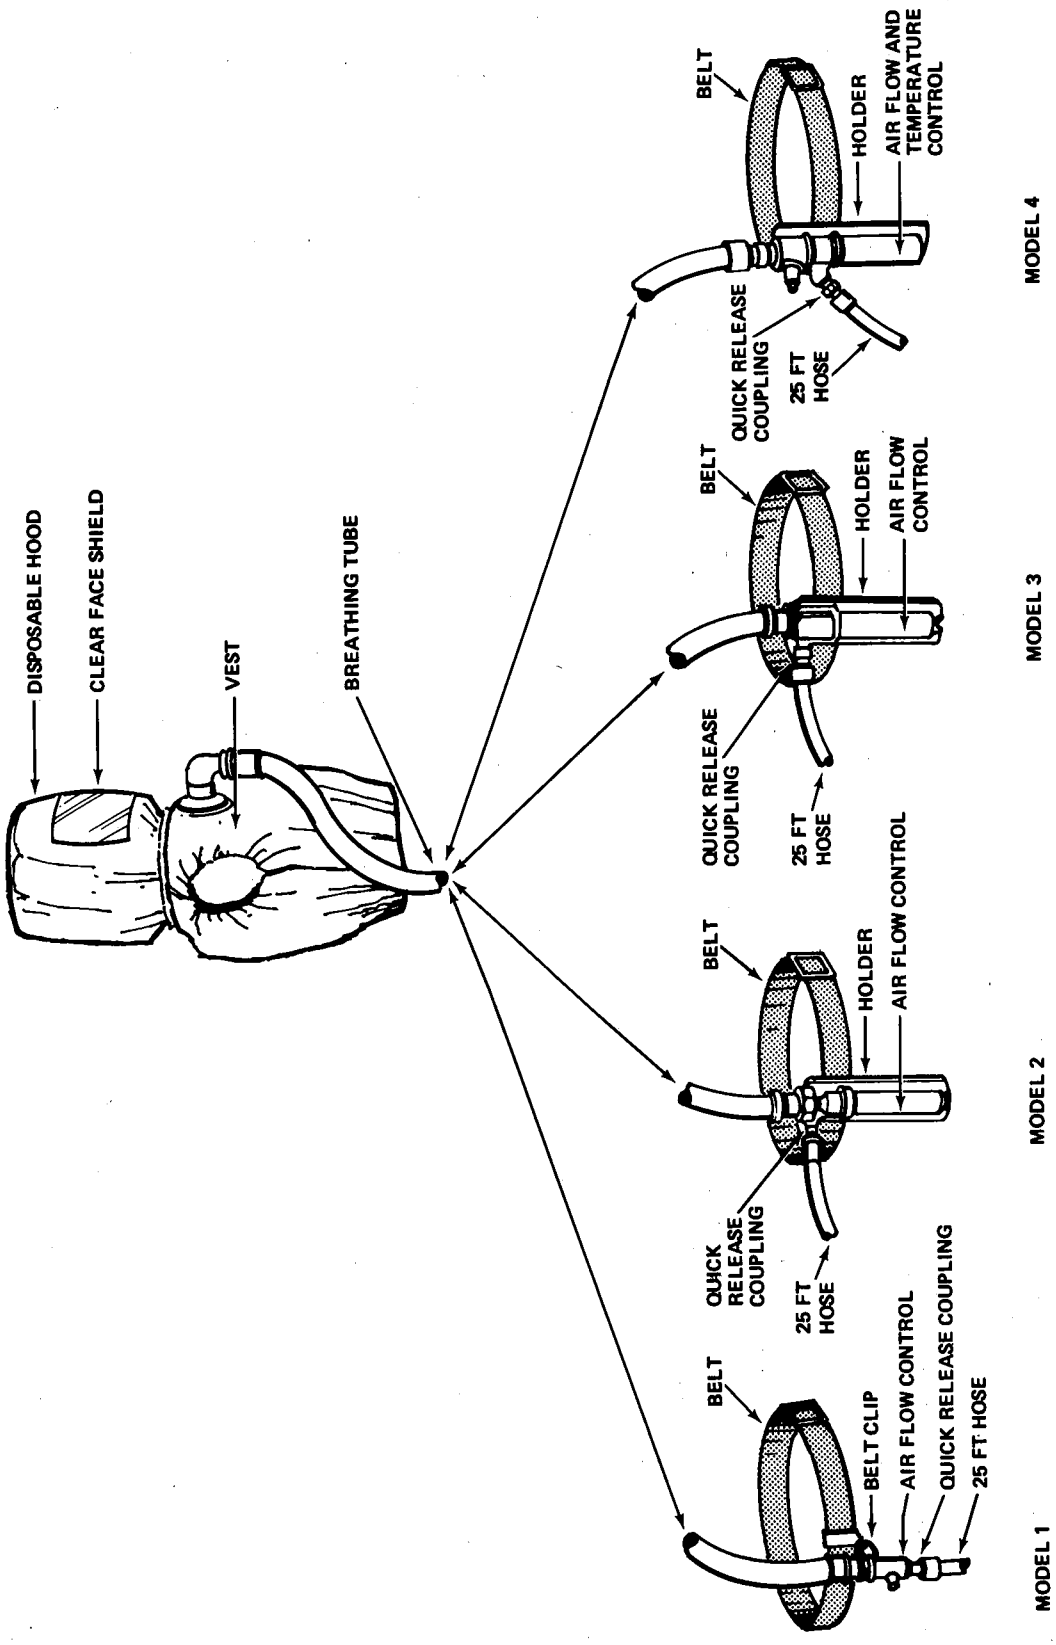


Figure 1. Airline vest respirator assemblies.
(For illustrative purposes only.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - MU
Navy - YD
Air Force - 84

Review activities:

Army - MD
Navy - MC

User activities:

Navy - SH, CG

Civil Agency Coordinating Activity:

GSA - FSS

Preparing activity:

Navy - YD

Project No. 4240-0313

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced hrein. Price cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.