GGG-S-0075a(GSA-FSS)
January 4, 1966
Interim Revision of
Fed. Spec. GGG-S-75
October 3, 1955

INTERIM FEDERAL SPECIFICATION

SAW SET, HAND

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers one type of saw set used for setting teeth on hand, band, panel, and back saws.

1.1.1 Federal specification coverage. This specification covers only those types of saw sets generally purchased by the Federal Government and is not intended to include all of the types that are commercially available.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications, standards, and publications of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Standards:
Fed. Std. No. 102 - Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 151 - Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:
MIL-H-15424 - Hand Tools; Packaging Of.

Military Standards:
MIL-Std-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-Std-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 5110

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:37Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following publication, of the issue in effect on date of invitation for bids, forms a part of this specification:

National Bureau of Standards Handbook:
H28 - Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402).

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are for the convenience of identification, and are not intended to preclude the purchase of saw sets which are otherwise in accordance with the requirements of this specification.

3.2 Material. The saw sets shall be of high-grade ferrous materials of such composition and quality as to produce tools conforming to the requirements hereinafter specified.

3.3 Design. The saw sets shall be of either a straight lever grip or pistol grip so designed and constructed that by the movement of the operating lever the saw teeth are set when the plunger is caused to move forward and impinge on an anvil located in the head of the tool. A spiral spring or other suitable means shall be provided for the return of the lever to the open position.

3.4 Screw Threads. The screw threads used with saw sets shall be in conformance with the current issue of the National Bureau of Standards Handbook H28.

3.5 Marking for identification. The saw sets shall be marked in a legible and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.6 Finish. The saw sets shall have a smooth even surface thoroughly cleaned and substantially free from scale, pits, nodules, burrs, cracks, sharp edges or other detrimental defects. Surfaces not usually ground or buffed shall have a surface finish conforming to good manufacturing practice.

3.7 Component parts. The saw sets shall be composed essentially of a body, lever handle, anvil, plunger, and gage screw, guide plate or guide plunger.

3.7.1 Body. The body shall be of steel, gray or malleable iron. The handle portion of the body shall be smooth, knurled, or impressed and so shaped to afford a comfortable handgrip. The head of the body shall be constructed in such a manner that the saw teeth are in plain view to enable the operator to properly adjust the tool to the tooth being set.

3.7.2 Lever handle. The lever handle shall be of steel or malleable iron smoothly finished to afford a comfortable handgrip in any position. The lever handle shall be hinged to the body in such a manner that positive pressure may be applied to the plunger.


3.7.3 Anvil. The anvil shall be of tool steel properly hardened to a Rockwell hardness value of not less than 50 or more than 60 on the C scale when tested as specified in 4.4.1. The anvil shall be graduated and numbered for setting saws with a pitch range of from 4 to 14 teeth per inch. The anvil shall be rigidly secured to the head of the body and be adjustable in order that the graduated numbers on the anvil may be indexed to correspond with the number of saw teeth per inch. The tooth contact surface of the angle or bevel shall be smoothly finished and so regulated as to prevent the saw tooth from being torn or distorted when set is made. A knurled thumb nut or other suitable means shall be provided for locking the anvil in any position of adjustment.

3.7.4 Plunger. The plunger shall be of tool steel properly hardened to a Rockwell hardness value of not less than 54 nor more than 60 on the C scale when tested as specified in 4.4.1. The tooth contact surface at the end of the plunger shall be smoothly finished to assure a smooth even bend of the saw tooth after set is made. The end of the plunger, when in normal position, shall be approximately 1/8 inch from the anvil. The plunger shall be capable of setting the cutting edges of saw teeth having a thickness of 0.049 inch or less. The plunger and the mating face of the anvil shall be either parallel or within 4 degrees of being parallel at the point of contact in any adjustable position of the anvil.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

3.7.5 Gage screw, guide plate or guide plunger. The gage screw, guide plate or guide plunger shall be of steel. Means shall be provided to retain the screw or plate in position when adjusted to the thickness of the saw. When the plunger is used, it shall provide sufficient pressure to guide the saw with each set of the tooth.

3.8 Saw sets shall be similar to figure 1.

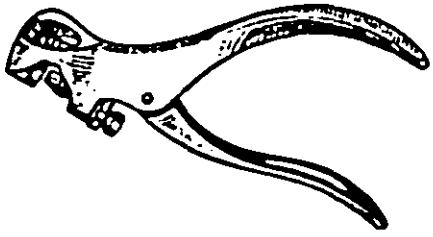

Straight lever grip.



Pistol grip.

Figure 1. Saw sets, hand

3.9 Workmanship. Workmanship shall be first class in every respect and in accordance with good commercial practice.

4. QUALITY ASSURANCE PROVISIONS

4.1 *Responsibility for inspection.* Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1 above, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as indicated in table I.

Table I. Sampling Data

Category	Sample Unit	Inspection Level	Acceptable Quality Level	AQL Expressed In Terms Of	Reference
Visual examination	1 ea.	II	4.0	Defects per hundred units	Paragraph 4.3.1
Dimensional examination	1 ea.	II	4.0	Same	Paragraph 4.3.2
Testing	1 ea.	S-3	1.5	Same	Paragraph 4.4
Preparation for delivery	One container	S-2	4.0	Same	Paragraph 4.5

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:37Z
Check the source to verify that this is the current version before use.

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any nonconformance in design, material, finish, coating, construction, workmanship, and marking.

4.3.2 Dimensional examination. Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1 and 4.4.2.

4.4.1 Hardness test. Each of the sample saw sets shall be tested in accordance with method 243.1 of Fed. Test Method Std. 151 to determine whether the anvil and plunger conform to the Rockwell hardness specified in 3.7.3 and 3.7.4.

4.4.2 Performance test. Each of the sample saw sets shall be tested in the following manner. Saw sets shall set teeth with a maximum of .049 inches thick on three separate saws having 4 to 6, 8 to 10, and 14 points per inch, respectively. The set of each of the teeth shall be uniform and the deflection or bend shall not extend more than one-half the depth of the tooth. Each individual saw set subjected to the test shall set at least ten teeth on each saw to determine compliance with the applicable requirements of this specification. At the conclusion of the test the component members shall show no evidence of mechanical defect.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with table II. For examination of interior packaging the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

Table II. Classification of preparation for delivery defects

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.
Contents (exterior and interior container)	Number per container is more or less than required. Net weight exceeds requirements.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging and packing. Unless otherwise specified (see 6.1) the saw sets shall be preserved, packaged, and packed in accordance with MIL-H-15424. The level of preservation and packaging shall be A or C and the level of packing shall be A, B, or C, as specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

5.1.1 As part of the requirements of section 5 of this specification the following is considered as part of table I of MIL-S-15424:

Column 1	Column 2	Column 3	Column 4	Column 6
Set: Saw, Hand	P-2, P-6	I	1	24

5.2 Marking.

5.2.1 Civil agencies. In addition to markings required by the contract or order, the unit packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 Military activities. In addition to markings required by the contract or order, the unit packages and shipping containers shall be marked in accordance with MIL-Std-129.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Applicable levels of preservation, packaging, and packing (see 5.1).
*(c) Preservation, packaging, and packing other than specified (see 5.1).
(d) Marking, if different (see 5.2).

6.2 Transportation description. - The applicable transportation description is as follows:

Tools, not otherwise indexed by name.
Carload minimum weight 30,000 pounds.

Mechanics' hand tools, not otherwise indexed.
Truckload minimum weight 30,000 pounds

* Civil agency procurements. When level B packaging is required for civil agency procurements, the level A requirements in 5.1 shall apply.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:37Z
Check the source to verify that this is the current version before use.