GGG-S-118a
November 22, 1963

SUPERSEDING
Fed. Spec. GGG-S-118
October 18, 1954

FEDERAL SPECIFICATION

SCRAPER, WOOD AND GLASS

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers scrapers generally used for wood and glass scraping.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Types, classes, and styles.* Scrapers shall be of the following types, classes, and styles as specified (see 6.2):

Type I.—Box (hinged handle).
Type II.—Floor (fixed handle).
Type III.—Wood (replaceable blade).
  Class 1.—Short grip.
    Style A.—Four-edged blade.
    Style B.—Two-edged blade.
  Class 2.—Long grip.
    Style A.—Four-edged blade.
    Style B.—Two-edged blade.
Type IV.—Window (holder and razor blade).
Type V.—Blade (blades only).
Type VI.—Shave hook (plumbers, painters, etc.).
Type VII.—Cabinet, double handled, adjustable blade.

1.2.2. *Size.* Scrapers shall be of the sizes shown for each type, and as specified.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, or request for proposal, form a part of this specification:

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Test Method Std. No. 151—Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

Military Specifications:

MIL-P-116—Preservation, Methods of.
MIL-H-15424—Hand Tools; Packaging of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-109—Inspection Terms and Definitions.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 **Illustrations.** The illustrations shown herein are for the convenience of identification and are not intended to preclude the purchase of scrapers which are otherwise in accordance with the requirements of this specification.

3.2 **Material.**

3.2.1 *Metal parts.* Blade materials and all other metal parts shall be as specified herein.

3.2.2 *Wooden parts.* Wooden parts shall be of clear, straight-grained, seasoned hardwood, such as maple, ash, hickory, or birch.

3.3 **Design.** The scrapers shall be suitable for use in scraping wood or glass; handles shall afford a comfortable and adequate handgrip. Scrapers shall be so constructed that, when assembled for use, no part shall become detached under normal service conditions.

3.4 **Replaceable blades.** Contractors supplying scrapers under this specification shall make available and furnish replaceable blades, when required (see 6.2.1). All blades having the same manufacturer's part number shall be constructed to definite standards, tolerances and clearances in order that such blades may be completely interchangeable and may be replaced or adjusted without requiring modification.

3.5 **Finish.**

3.5.1 *Metal parts.* Metal parts shall be smoothly finished, free from oxide scale, and shall have a lacquered or natural finish, except the scraping edges which shall be ground.

3.5.2 *Wooden parts.* Wooden parts shall be smoothly finished and have a protective coating of varnish, lacquer, or other equally suitable coating.

3.6 **Identification marking.** Scraper blades and holders shall be marked in a plain and permanent manner with the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined.

3.7 **Type I, box (hinged handle).** Type I scrapers shall be suitable for removing stencil markings, and shall consist essentially of a body, hinged handle, and blade. The overall length of the scraper shall be approximately 13 inches.

3.7.1 *Body.* The body shall be of metal construction designed to hold the scraping blade at a fixed angle and at a selected depth of cut. The body base shall have a slightly convex surface away from the center to both sides. Suitable means shall be provided in the body for the engagement of the pin holding the hinged handle to the body.

3.7.2 *Hinged handle.* The metal portion of the hinged handle shall be designed to hinge onto the pin engaged in the body. The wood grip shall be fitted and securely fastened to the metal portion of the handle.

3.7.2.1 *Ferrule.* A metal ferrule shall be fitted and securely fastened to the small end of the wood grip.

3.7.3 *Blade.* The blade shall be of high-grade steel and heat treated to a hardness of 54 to 56 on the Rockwell C scale (see 4.3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

The blade shall be slightly curved outward across the width of the scraping edge. The width of the blade shall be 2 inches, plus or minus 0.010 inch.

3.7.4 *Type I scrapers shall be similar to figure* 1.



FIGURE 1.—Type I, box (hinged handle).

3.8 **Type II, floor (fixed handle).** Type II scrapers shall be suitable for floor work, scraping in corners, and removing paint and shall consist essentially of a holding head, handle, and blade. The overall length of the scraper shall be approximately 13 inches.

3.8.1 *Holding head.* The holding head shall be designed to hold the blade at a fixed angle and at the desired depth of cut.

3.8.2 *Handle.* The small end shall be tapered into the neck of the holding head and securely fastened.

3.8.3 *Blade.* The blade shall be of high-grade steel and heat treated to a hardness of 54 to 56 on the Rockwell C scale (see 4.3.1). The width of the blade shall be 3 inches, plus or minus 1/32 inch.

3.8.4 *Type II scrapers shall be similar to figure* 2.




FIGURE 2.—Type II, floor (fixed handle).

3.9 **Type III, wood (replaceable blades).** Type III scrapers shall be of two classes and two styles, shall be suitable for scraping wood in preparation for refinishing, and shall consist essentially of a wood grip handle and blades.

3.9.1 *Wood grip handle.* The wood grip handle shall be designed to hold the blades rigidly in position.

3.9.2 *Blade.* The blade shall be of a good grade steel and heat treated on both ends to a hardness of 50 to 54 on the Rockwell C scale (see 4.3.1). The hardness shall be measured 1/8 inch back of scraping edge after grinding. The blade shall be slightly curved outward across the width of the scraping edges.

3.9.3 *Class* 1, *short grip.* The overall length of class 1 scraper shall be approximately 5 inches. Class 1, styles A and B scrapers shall conform to table I.

TABLE I. *Type III, class* 1, *styles A and B wood scraper (replaceable blades), short grip*

Size	Blade width ± 1/16 inch	Wood grip handle width ± 1/16 inch
	Inches	*Inches*
1	1-1/2	1-1/2
2	2-1/2	2-1/2

3.9.3.1 *Style A, four-edged blade.* Style A scrapers shall have four-edged blades neatly fitted into the wood grip handles, and shall be similar to figure 3.

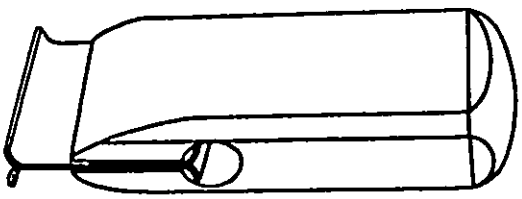


FIGURE 3.—Type III, class 1, style A wood scraper, short grip, four-edged blade.

3.9.3.2 *Style B, two-edged blade.* Style B scrapers shall have two-edged blades neatly fitted into the wood grip handle and be similar to figure 4.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:37Z
Check the source to verify that this is the current version before use.

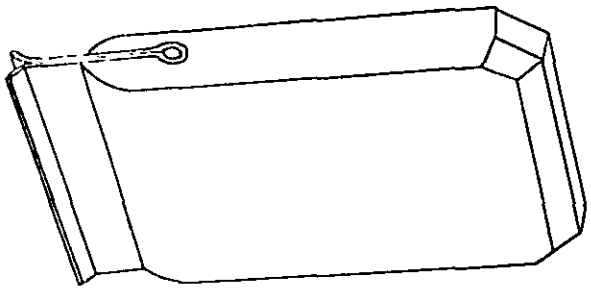


FIGURE 4.—Type III, class 1, style B wood scraper, short grip, two-edged blade.

3.9.4 *Class 2, long grip.* Class 2, styles A and B scrapers shall conform to table II.

TABLE II. *Type III, class 2, styles A and B wood scraper (replaceable blade), long grip*

Size	Blade width ± 1/16 inch	Handle width adjacent to blade ± 1/16 inch	Over-all length	
			Minimum	Maximum
	Inches	*Inches*	*Inches*	*Inches*
1	1-1/2	1-1/2	7	7-3/4
2	2-1/2	2-1/2	8-1/2	9-1/4

3.9.4.1 *Style A, four-edged blade.* Style A scrapers shall be in accordance with 3.9.3.1 and shall be similar to figure 5.

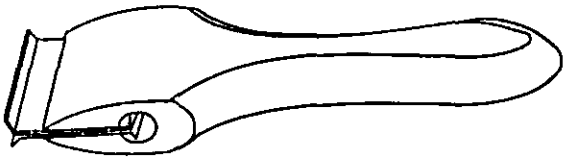


FIGURE 5.—Type III, class 2, style A wood scraper, long grip, four-edged blade.

3.9.4.2 *Style B, two-edged blade.* Style B scrapers shall be in accordance with 3.9.3.2, and shall be similar to figure 6.

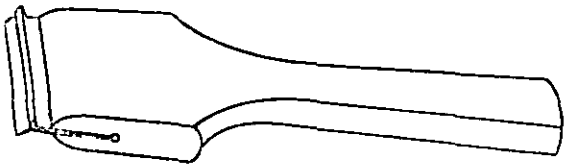


FIGURE 6.—Type III, class 2, style B wood scraper, long grip, two-edged blade.

3.10 **Type IV, window (holder and razor blade).** Type IV scrapers shall be suitable for glass scraping and shall consist essentially of a hinged holder and a single-or double-edged razor blade.

3.10.1 *Holder.* The hinged holder shall be of metal and shall be manufactured in two parts, a head and a body, with a screw and nut forming the pivot of the hinge. When the screw and nut are tightened, the action shall lock the head to the body in any position from closed, with no part of the razor blade exposed, to approximately 270 degrees open position exposing the razor blade edge. Means shall be provided to rigidly hold the razor blade in the head.

3.10.2 *Blade.* The razor or scraping blade, single- or double-edged, shall be of a commercial brand sold on the open market. At least one blade shall be furnished with each holder.

3.10.3 *Type IV scraper shall be similar to figure 7.*

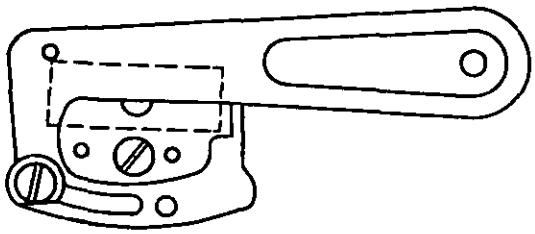


FIGURE 7.—Type IV window scraper (holder and razor blade).

3.11. **Type V blade (blade only).** Type V scrapers shall be of high-grade steel, heat treated to a hardness of 48 to 56 on the Rockwell C scale (see 4.3.1). The blades shall be ground on both sides, and the four edges ground at right angles to the sides. The blade shall conform to the dimensions of table III and be similar to figure 8.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:37Z
Check the source to verify that this is the currentversion before use.

TABLE III. *Type V, blade scraper (blade only)*

Blade dimensions		
Width ± 1/16	Length ± 1/16	Thickness ± 0.002 inch
Inches	*Inches*	*Inch*
2	4	0.035
2	6	.035
2-1/2	5	.035
2-1/2	6	.035
3	4	.035
3	5	.035
3	6	.035
4	6	.035




FIGURE 8.—Type V, blade scraper (blades only).

3.12 Type VI, shave hook (plumbers and painters). Type VI scrapers shall be suitable for use by plumbers, painters and so forth, and shall consist essentially of a shank, wood handle, and blade(s) (see 3.12.3.1). When specified (see 6.2), a leather sheath shall be furnished for the blade(s).

3.12.1 *Shank.* The shank shall be of either steel or malleable iron with suitable means provided on one end of the shank for accepting and holding the blade(s) in a fixed position and for engaging the nut or screw used in securing the blade(s) to the shank.

3.12.2 *Wood handle.* The wood handle shall be fitted and securely fastened to the shank.

3.12.2.1 *Ferrule.* The small end of the wood handle adjacent to the shank shall be fitted with a metal ferrule, securely fastened.

3.12.3 *Blades.* The blades shall be of good quality high-carbon steel and heat-treated to a hardness of 52 to 57 on the Rockwell C scale (see 4.3.1). The blades shall be ogive (oval), half ogive (half oval), and triangular in shape. The blades shall be designed to provide interchangeability of the blades on the shank. The blades along the cutting edge shall be ground to approximately 45 degrees.

3.12.3.1 *Shape.* When either the ogive (oval), half ogive (half oval), or the triangular shaped blade is required for use with type VI scraper, the shape of the blade or blades required shall be specified (see 6.2).

3.12.4 Type VI scrapers shall conform to table IV, and shall be similar to figure 9.

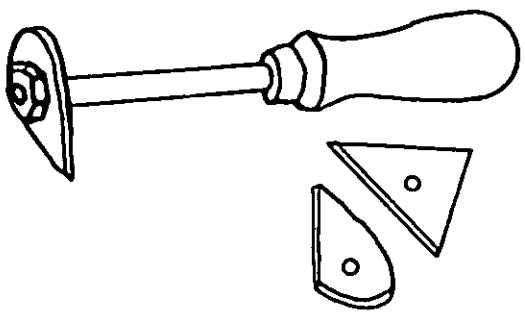


FIGURE 9.—Type VI, shave hook scraper (plumbers and painters).

TABLE IV. *Type VI, shave hook scraper (plumbers and painters)*

Size	Length overall ± 10 percent	Blade thickness ± 0.015 inch	Blade dimensions				
			Ogive (oval)		Half ogive (half oval)		Triangular all sides
			Width min.	Length max.	Width min.	Length max.	
	Inches	*Inch*	*Inches*	*Inches*	*Inches*	*Inches*	*Inches*
1	5	0.074	1-1/2	2-1/8	1-3/8	2-1/8	2-1/8
2	8-1/2	.093	1-3/8	2-9/32	1-1/4	2-1/4	2-1/2
3	6	.125	1-11/16	2-3/4	—	—	—

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

3.13 **Type VII, cabinet, double handled, adjustable blade.** Type VII scraper shall be suitable for smoothly scraping wood cabinets, removing slight ridges left by the plane, and shall consist essentially of a frame with raised handles and a blade. The scraper shall be provided with a suitable clamping arrangement for holding the blade securely in place under normal service and an adjusting screw to properly bow the blade.

3.13.1 *Frame.* The frame shall be of good quality cast gray iron or cast malleable iron. The casting shall be of uniform quality free from blowholes, porosity, hard spots, shrinkage defects, cracks, or other injurious defects. The frame shall be so designed as to provide suitable handles and suitable surface for support of the blade. The frame shall have a finish surface on that portion which comes in contact with the work. The overall length of the frame shall be approximately 11-1/2 inches. The unfinished portion of the frame shall be japanned or enameled.

3.13.1.1 *Handles.* The handles shall be of the raised type, well proportioned to afford a comfortable handgrip. A hole shall be provided near the end of the handles to enable the scraper to be hung out of the way when not in use.

3.13.2 *Blade.* The blade shall be of high-grade tool steel. The blade shall be hardened and tempered at least 1/2 the length of the blade, showing not less than 48 nor more than 56 on a Rockwell C scale 1/8 and 1/2 inch from the cutting edge (see 4.3.1). The blade shall be approximately 2-3/8 inches in length and 2-3/4 inches wide. The blade shall be ground and sharpened to a single bevel cutting edge ready for use and shall be capable of being flexed to a slight curve.

3.13.3 *Type VII scraper shall be similar to figure 10.*

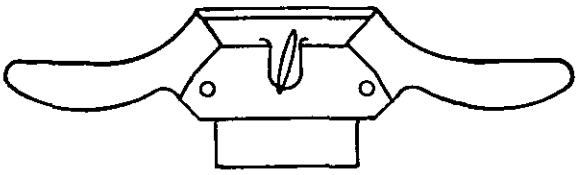


FIGURE 10.—Type VII cabinet scraper, double handled, adjustable blade.

3.14 **Workmanship.** The workmanship shall be first class throughout. Scrapers and blades shall be free from rust, burrs, fins, and any other imperfection which may impair their serviceability or durability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification, where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Sampling for quality conformance inspection.** Sampling for quality conformance inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, unless otherwise indicated herein. Inspection terms and definitions shall be interpreted in accordance with MIL-STD-109.

4.2.1 *Inspection of the end item.* Inspection of the scrapers shall be performed as specified in the following paragraphs. A lot shall consist of scrapers of the same type, class, and style. The sample unit shall be one completely fabricated scraper.

4.2.1.1 *Visual examination.* Each sample unit shall be visually examined in accordance with classification of defects set forth in table V. The inspection level shall be level II with an acceptable quality level of 2.5 for majors and 6.5 for total defects, expressed in defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

TABLE V.—*Classification of defects*

Examine	Defect	Major	Minor
Finish	Finish not smooth, not free from oxide scale, scraping edges not ground (metal parts only).	X	
	Finish not smooth, protective coating not provided (wooden parts only).	X	
Material	Not free from blowholes, hard spots, porosity, shrinkage, defects or cracks (metal parts only).	X	
	Not clear, straight grained, seasoned hardwood (wooden parts only.)	X	
Design	Not type, class or style specified.	X	
Construction and Workmanship	Scraper does not securely or rigidly hold scraper blade in proper position.	X	
	Wood grip not securely fastened to metal portion of handle (as applicable).	X	
	Metal ferrule not securely fastened to small end of wood grip (as applicable).	X	
	Blade edges not properly ground or sharpened (as applicable).	X	
	Handles do not afford comfortable and adequate hand grip (as applicable).		X
	Screws or nuts missing or loose (as applicable).	X	
	Screws or nuts missing or loose (as applicable).	X	
	Blade or blades missing.	X	
Marking	Missing, illegible, not permanent.		X

4.2.1.2 *Dimensional examination.* Each sample unit shall be examined for dimensions specified in applicable paragraphs and tables. Any deviation therefrom shall constitute a defect. The inspection level shall be level II with an acceptable quality level of 4.0 defects per hundred units.

4.2.1.3 *Testing.* Each sample unit shall be tested in accordance with 4.3. The inspection level shall be level L4 for items heat treated as a single batch. The inspection level shall be level L7 for items not identifiable as being heat treated as a single batch. The acceptable quality level shall be 1.5 defects per hundred units.

4.3 **Test procedure.**

4.3.1 *Hardness test.* Hardness testing shall be performed in accordance with method 243.1 of Fed. Test Method Std. No. 151 to determine compliance with the hardness requirements specified in applicable paragraphs of section 3.

4.4 **Inspection of preparation for delivery.** Inspection to determine compliance with preparation for delivery requirements shall be accomplished in accordance with MIL-H-15424.

5. PREPARATION FOR DELIVERY

(Civil agencies should refer to Fed. Std. No. 102 for definitions of the various levels of packaging and packing protection for supplies and equipment.)

5.1 **Cleaning, preservation and packaging.**

5.1.1 *Level A.* Scrapers shall be preserved and packaged in accordance with level A of MIL-H-15424.

5.1.2 *Level C.* Cleaning, preservation, and packaging shall be in accordance with the supplier's commercial practice.

5.2 **Packing.**

5.2.1 *Level A.* Scrapers, packaged as specified (see 6.2), shall be packed in ac-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

cordance with level A requirements of MIL-H-15424.

5.2.2 *Level B.* Scrapers, packaged as specified (see 6.2), shall be packed in accordance with level B requirements of MIL-H-15424.

5.2.3 *Level C.* Scrapers, packaged as specified (see 6.2), shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with rules or regulations of carriers as applicable to the mode of transportation.

5.3 **Marking.**

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order marking for shipment shall be in accordance with Fed. Std. No. 123.

5.3.2 *Military agencies.* In addition to any special marking required by the contract or order or herein, interior and exterior shipping containers shall be marked in accordance with MIL-H-15424.

6. NOTES

6.1 **Intended use.** The scrapers are intended to be used for scraping and finishing wooden, glass, or metal surfaces.

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Type, class, style, and size of scraper required (1.2).

(*c*) Whether leather sheath is required (3.12).

(*d*) What shape of blade or blades are required for type VI scraper (3.12.3.1).

(*e*) Applicable levels of preservation, packaging and packing (5.1 and 5.2).

(*f*) Marking, if different (5.3).

6.2.1 When ordering replaceable blades (see 3.4), specify the following:

(*a*) The manufacturer's name or trademark of the scraper for which replaceable blades are required.

(*b*) Type, class, style, and size required, if applicable (see 1.2).

(*c*) Manufacturer's tool number, if applicable.

(*d*) Quantity of replaceable blades required.

6.3 **Transportation description.** Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Floor scrapers, other than power.
Carload minimum weight 30,000 pounds.

Motor:

Tools, hand, other than power.
Truckload minimum weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY CUSTODIANS:

Army—GL

Navy—Sh

Air Force—MOA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.