GGG-S-118B
May 11, 1992
SUPERSEDING
GGG-S-118A
November 22, 1963

FEDERAL SPECIFICATION

SCRAPER, WOOD AND GLASS

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers scrapers generally used for wood and glass scraping.

1.1.1 Federal specification coverage. Federal specifications do not cover all varieties of the commodity indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types, classes, and styles. Scrapers shall be of the following types, classes, and styles as specified (see 6.2):

Type I - Box (hinged handle)
Type II - Floor (fixed handle)
Type III - Wood (replaceable blade)
  Class 1 - Short grip
    Style A - Four-edged blade
    Style B - Two-edged blade
  Class 2 - Long grip
    Style A - Four-edged blade
    Style B - Two-edged blade
Type IV - Window (holder and razor blade)
Type V - Blade (blades only)
Type VI - Shave hook (plumbers, painters, etc.)
Type VII - Cabinet, double handled, adjustable blade

1.2.2 Size. Scrapers shall be of the sizes shown for each type, and as specified.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-P-40 - Preservation and Packing of Hand Tools; Tools and Tool Accessories for Power Driven, Metal and Woodworking Machinery

Federal Standards:

FED-STD-376 - Preferred Metric Units for General Use by the Federal Government

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and Commercial Item Descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification, and other Federal specifications and Commercial Item Descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:37Z
Check the source to verify that this is the current version before use.

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

(Copies of military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM):

E 18 - Metallic Materials Rockwell Hardness and Rockwell Superficial Hardness of

(Applications for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are illustrative and not restrictive provided the scrapers are otherwise in accordance with this specification.

3.2 Material.

3.2.1 Metal. Blade materials and all other metal parts shall be as specified herein.

3.2.2 Wood. Wooden parts shall be of clear, straight-grained, seasoned hardwood, such as maple, ash, hickory, or birch.

3.3 Design. The scrapers shall be suitable for use in scraping wood or glass; handles shall afford a comfortable and adequate handgrip. Scrapers shall be so constructed that, when assembled for use, no part shall become detached under normal service conditions.

3.4 Replaceable blades. Contractors supplying scrapers under this specification shall make available and furnish replaceable blades, when required (see 6.2.1). All blades having the same manufacturer's part number shall be constructed to definite standards, tolerances, and clearances in order that such blades may be completely interchangeable and may be replaced or adjusted without requiring modification.

3.5 Finish.

3.5.1 Metal parts. Metal parts shall be smoothly finished, free from oxide scale, and shall have a lacquered or natural finish, except the scraping edges which shall be ground.

3.5.2 Wooden parts. Wooden parts shall be smoothly finished and have a protective coating of varnish, lacquer, or other equally suitable coating.

3.6 Marking. The scraper shall be marked with the manufacturer's name or identifying symbol and the state or country of manufacture. The marking shall be engraved, molded, etched, or stamped in such a manner that it will be permanent to the extent that it will remain clear and legible throughout the life of the item.

3.7 Type I, box (hinged handle). Type I scrapers shall be suitable for removing stencil markings, and shall consist essentially of a body, hinged handle, and blade. The overall length of the scraper shall be approximately 13 inches. Type I scrapers shall be similar to figure 1.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:37Z
Check the source to verify that this is the currentversion before use.



Figure 1. Type I, box (hinged handle).

3.7.1 Type I body. The body shall be of metal construction designed to hold the scraping blade at a fixed angle and at a selected depth of cut. The body base shall have a slightly convex surface away from the center to both sides. Suitable means shall be provided in the body for the engagement of the pin holding the hinged handle to the body.

3.7.2 Hinged handle. The metal portion of the hinged handle shall be designed to hinge onto the pin engaged in the body. The wood grip shall be fitted and securely fastened to the metal portion of the handle.

3.7.2.1 Hinged handle ferrule. A metal ferrule shall be fitted and securely fastened to the small end of the wood grip.

3.7.3 Type I blade. The blade shall be of high-grade steel and heat-treated to a hardness of 54 to 56 on the Rockwell C scale (see 4.4.1). The blade shall be slightly curved outward across the width of the scraping edge. The width of the blade shall be 2 inches ± 0.010 inch.

3.8 Type II, floor (fixed handle). Type II scrapers shall be suitable for floor work, scraping in corners, and removing paint and shall consist essentially of a holding head, handle, and blade. The overall length of the scraper shall be approximately 13 inches. Type II scrapers shall be similar to figure 2.




Figure 2. Type II, floor (fixed handle).

3.8.1 Holding head. The holding head shall be designed to hold the blade at a fixed angle and at the desired depth of cut.

3.8.2 Type II handle. The small end shall be tapered into the neck of the holding head and securely fastened.

3.8.3 Type II blade. The blade shall be of high-grade steel and heat-treated to a hardness of 54 to 56 on the Rockwell C scale (see 4.4.1). The width of the blade shall be 3 inches ± 1/32 inch.

3.9 Type III, wood (replaceable blade). Type III scrapers shall be of two classes and two styles, shall be suitable for scraping wood in preparation for refinishing, and shall consist essentially of a wood grip handle and blade.

3.9.1 Wood grip handle. The wood grip handle shall be designed to hold the blade rigidly in position.

3.9.2 Blade. The blade shall be of a good grade steel and heat-treated on both ends to a hardness of 50 to 54 on the Rockwell C scale (see 4.4.1). The hardness shall be measured 1/8 inch back of scraping edge after grinding. The blade shall be slightly curved outward across the width of the scraping edges.

3.9.3 Class 1, short grip. The overall length of class 1 scraper shall be approximately 5 inches. Class 1, styles A and B scrapers shall conform to table I.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:37Z
Check the source to verify that this is the currentversion before use.

TABLE I. Type III, class 1, styles A and B wood scraper (replaceable blade), short grip

Size	Blade width ± 1/6 inch	Wood grip handle width ± 1/16 inch
	Inches	Inches
1	1-1/2	1-1/2
2	2-1/2	2-1/2

3.9.3.1 Class 1, style A, four-edged blade. Class 1, style A scrapers shall have four-edged blades neatly fitted into the wood grip handles, and shall be similar to figure 3.

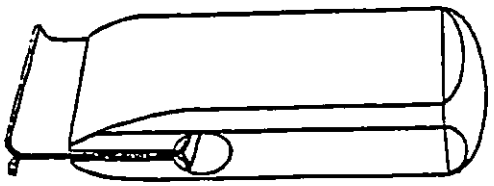


Figure 3. Type III, class 1, style A wood scraper, short grip, four-edged blade.

3.9.3.2 Class 1, style B, two-edged blade. Class 1, style B scrapers shall have two-edged blades neatly fitted into the wood grip handle and be similar to figure 4.

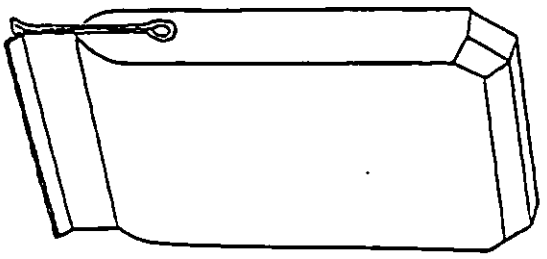


Figure 4. Type III, class 1, style B wood scraper, short grip, two-edged blade.

3.9.4 Class 2, long grip. Class 2, styles A and B scrapers shall conform to table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

TABLE II. Type III, class 2, styles A and B wood scraper (replaceable blade), long grip

Size	Blade width ± 1/16 inch	Handle width adjacent to blade ± 1/16 inch	Overall length	
			Minimum	Maximum
	Inches	Inches	Inches	Inches
1	1-1/2	1-1/2	7	7-3/4
2	2-1/2	2-1/2	8-1/2	9-1/4

3.9.4.1 Class 2, style A, four-edged blade. Class 2, style A scrapers shall be in accordance with 3.9.3.1 and shall be similar to figure 5.

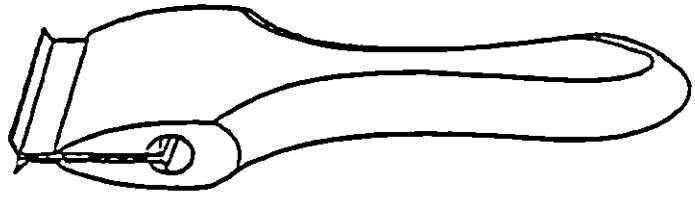


Figure 5. Type III, class 2, style A wood scraper, long grip, four-edged blade.

3.9.4.2 Class 2, style B, two-edged blade. Class 2, style B scrapers shall be in accordance with 3.9.3.2, and shall be similar to figure 6.

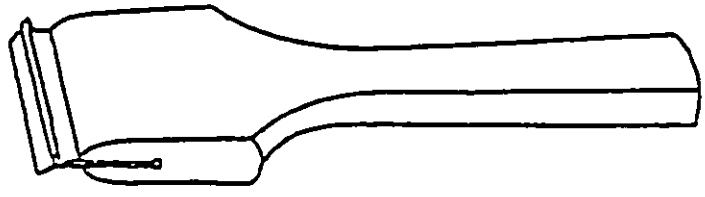


Figure 6. Type III, class 2, style B wood scraper, long grip, two-edged blade.

3.10 Type IV, window (holder and razor blade). Type IV scrapers shall be suitable for glass scraping and shall consist essentially of a hinged holder and a single- or double-edged razor blade. Type IV scrapers shall be similar to figure 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

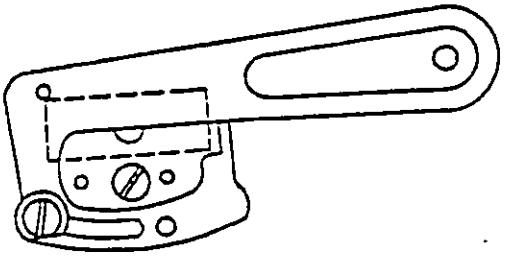


Figure 7. Type IV window scraper (holder and razor blade).

3.10.1 Holder. The hinged holder shall be of metal and shall be manufactured in two parts, a head and a body, with a screw and nut forming the pivot of the hinge. When the screw and nut are tightened, the action shall lock the head to the body in any position from closed, with no part of the razor blade exposed, to approximately 270 degrees open position exposing the razor blade edge. Means shall be provided to rigidly hold the razor blade in the head.

3.10.2 Type IV blade. The razor or scraping blade, single- or double-edged, shall be of a commercial brand sold on the open market. At least one blade shall be furnished with each holder.

3.11 Type V blade (blades only). Type V scrapers shall be of high-grade steel, heat-treated to a hardness of 48 to 56 on the Rockwell C scale (see 4.4.1). The blades shall be ground on both sides, and the two edges ground at right angles to the sides. The blade shall conform to the dimensions of table III and be similar to figure 8.

TABLE III. Type V blade scraper (blades only)

Blade dimensions		
Width ± 1/16	Length ± 1/16	Thickness ± 0.002 inch
Inches	Inches	Inch
2	4	0.035
2	6	0.035
2-1/2	5	0.035
2-1/2	6	0.035
3	4	0.035
3	5	0.035
3	6	0.035
4	6	0.035




Figure 8. Type V blade scraper (blades only).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

3.12 Type VI, shave hook (plumbers, painters, etc.). Type VI scrapers shall be suitable for use by plumbers, painters, etc., and shall consist essentially of a shank, wood handle, and blade(s). When specified (see 6.2), a leather sheath shall be furnished for the blade(s). Type VI scrapers shall conform to table IV and shall be similar to figure 9.

TABLE IV. Type VI, shave hook scraper (plumbers, painters, etc.)

Size	Length overall ± 10%	Blade thickness ± 0.15 inch	Blade dimensions				
			Ogive (oval)		Half ogive (half oval)		Triangular (all sides)
			Width (Min.)	Length (Max.)	Width (Min.)	Length (Max.)	
	Inches	Inch	Inches	Inches	Inches	Inches	Inches
1	5	0.074	1-1/2	2-3/16 ± 1/8	1-3/8	2-1/8	2-1/8
2	8-1/2	0.093	1-3/8	2-9/32	1-1/4	2-1/4	2-1/2
3	6	0.125	1-11/16	2-3/4	-	-	-

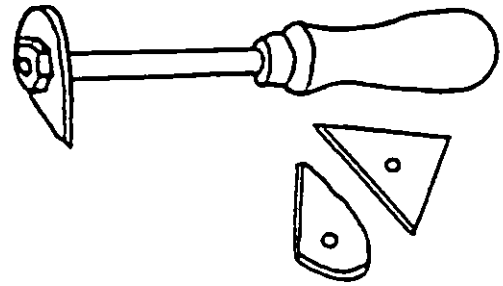


Figure 9. Type VI, shave hook scraper (plumbers, painters, etc.).

3.12.1 Shank. The shank shall be of either steel or malleable iron with suitable means provided on one end of the shank for accepting and holding the blade(s) in a fixed position and for engaging the nut or screw used in securing the blade(s) to the shank.

3.12.2 Wood handle. The wood handle shall be fitted and securely fastened to the shank.

3.12.2.1 Wood handle ferrule. The small end of the wood handle adjacent to the shank shall be fitted with a metal ferrule, securely fastened.

3.12.3 Type VI blades. The blades shall be of good quality high-carbon steel and heat-treated to a hardness of 52 to 57 on the Rockwell C scale (see 4.4.1). The blades shall be ogive (oval), half ogive (half oval), and triangular in shape. The blades shall be designed to provide interchangeability of the blades on the shank. The blades along the cutting edge shall be ground to approximately 45 degrees.

3.12.3.1 Shape. When either the ogive (oval), half ogive (half oval), or the triangular shaped blade is required for use with type VI scraper, the shape of the blade or blades required shall be specified (see 6.2).

3.13 Type VII, cabinet, double handled, adjustable blade. Type VII scraper shall be suitable for smoothly scraping wood cabinets, removing slight ridges left by the plane, and shall consist essentially of a frame with raised handles and a blade. The scraper shall be provided with a suitable clamping arrangement for holding the blade securely in place under normal service and an adjusting screw to properly bow the blade. Type VII scrapers shall be similar to figure 10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

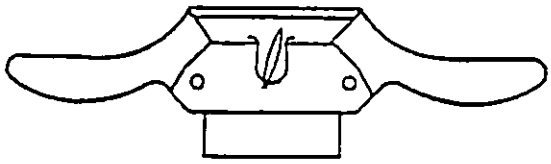


Figure 10. Type VII cabinet scraper, double handled, adjustable blade.

3.13.1 Frame. The frame shall be of good quality cast gray iron or cast malleable iron. The casting shall be of uniform quality free from blowholes, porosity, hard spots, shrinkage defects, cracks, or other injurious defects. The frame shall be so designed as to provide suitable handles and suitable surface for support of the blade. The frame shall have a finish surface on that portion which comes in contact with the work. The overall length of the frame shall be approximately 11-1/2 inches. The unfinished portion of the frame shall be japanned or enameled.

3.13.1.1 Type VII handles. The handles shall be of the raised types, well proportioned to afford a comfortable handgrip. A hole shall be provided near the end of the handles to enable the scraper to be hung out of the way when not in use.

3.13.2 Type VII blade. The blade shall be of high-grade tool steel. The blade shall be hardened and tempered at least 1/2 the length of the blade, showing not less than 48 nor more than 56 on the Rockwell C scale. Hardness shall be measured 1/8 and 1/2 inch from the cutting edge (see 4.4.1). The blade shall be approximately 2-3/8 inches in length and 2-3/4 inches wide. The blade shall be ground and sharpened to a single bevel cutting edge ready for use and shall be capable of being flexed to a slight curve.

3.14 Workmanship. The workmanship shall be first class throughout. Scrapers and blades shall be free from rust, burrs, fins, and any other imperfection which may impair their serviceability or durability.

3.15 Metric product. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this Federal Specification are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specification and standards to the extent specified, or, if none, in accordance with this specification.

4.2 Sampling procedures. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.3 Examination.

4.3.1 Visual examination. The end items shall be examined for the defects listed in table V. The lot size shall be expressed in terms of scrapers of the same type, class, and style. The sample unit shall be one scraper. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major and 6.5 for total (major and minor combined) defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of defects

Examine	Defect	Major	Minor
Construction and workmanship	Scraper does not securely or rigidly hold scraper blade in proper position	101	
	Wood grip not securely fastened to metal portion of handle (as applicable)	102	
	Metal ferrule not securely fastened to small end of wood grip (as applicable)	103	
	Blade edges not properly ground or sharpened (as applicable)	104	
	Handles do not afford comfortable and adequate hand grip (as applicable)		201
	Screws or nuts missing or loose (as applicable)	105	
	Blade or blades missing	106	
Material	Not free from blowholes, hard spots, porosity, shrinkage, defects or cracks (metal parts only)	107	
	Not clear, straight grained, seasoned hardwood (wooden parts only)	108	
Design	Not type, class, or style specified	109	
Finish	Finish not smooth, not free from oxide scale, scraping, edges not ground (metal parts only)	110	
	Finish not smooth, protective coating not provided (wooden parts only)	111	
Marking	Missing, illegible, not permanent		202

4.3.2 Dimensional examination. The end items shall be examined for conformance to dimensions specified herein. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in terms of scrapers of the same type, class, and style. The sample unit shall be one scraper. The inspection level shall be II and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.3.3 Testing. The end items shall be tested for the characteristic specified in 4.4.1. The lot size shall be expressed in units of scrapers of the same type, class, and style. The sample unit shall be one scraper. The inspection level shall be S-2, and the AQL, expressed in terms of defects per hundred units, shall be 4.0. Any test failures shall be classified as a defect.

4.4 Test methods.

4.4.1 Hardness test. Hardness testing shall be performed in accordance with ASTM E 18 to determine compliance with the hardness requirements specified in applicable paragraphs in section 3.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with table VI. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of preparation for delivery defects

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling Distortion of container
Contents	Number per container is more or less than required Net weight exceeds requirements

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking shall be in accordance with PPP-P-40. The level of preservation, packaging, and packing shall be A, B, or Commercial, as specified (see 6.2).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The scrapers are intended to be used for scraping and finishing wooden, glass, or metal surfaces.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Type, class, style, and size of scraper required (see 1.2).
c. Whether leather sheath is required (see 3.12).
d. What shape of blade or blades are required for type VI scraper (see 3.12.3.1).
e. Applicable levels of preservation, packaging, and packing required (see 5.1).

6.2.1 When ordering replaceable blades (see 3.4), specify the following:

a. The manufacturer's name or trademark of the scraper for which replaceable blades are required.
b. Type, class, style, and size required, if applicable (see 1.2).
c. Manufacturer's tool number, if applicable.
d. Quantity of replaceable blades required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Military Coordinating Activity

Army - GL

Custodians

Army - GL
Navy - SH
Air Force - 99

Review Activity

Air Force - 84

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.