[INCH-POUND]
GGG-S-65C
November 25, 1992
SUPERSEDING
GGG-S-0065B (GSA-FSS)
June 5, 1967 and
GGG-S-65A (See 6.2)
April 5, 1961

FEDERAL SPECIFICATION

SAWS, HAND

This Federal specification was approved by the Commissioner, Federal Supply Service, General Services Administration, Washington, DC 20406, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers manually-operated hand saws for cutting wood, metal, plastics and like materials. The saws consist of a flat blade with teeth on one or two edges, a handle and attaching screws. Frame-type saws and blades, and one and two-man crosscut saws are not included.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types and styles. Hand saws shall be of the following types and styles as specified (see 6.1):

Type I. Back.
Type III. Cable.
Type IV. Compass.
Type V. Crosscut.
Type VII. Dovetail.
Type VIII. Keyhole.
  Style A. Woodcutting.
  Style B. Metal-cutting
Type IX. Metal-cutting.
Type X. Miter box.
Type XI. Nested.
Type XIII. Pruning.
Type XIV. Rip.
Type XV. Adjustable handle.
  Style A. Compass blade
  Style B. Keyhole blade.
  Style C. Nail-saw blade.

1.2.2 Sizes. Hand saws shall be of the sizes shown in tables I through XII for each type and style, as specified (see 6.1).

AMSC N/A FSC 3750, 5110
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

Federal specification:
PPP-P-40 - Preservation and Packing of Hand Tools; and Tool Accessories for Power Driven, Metal and Woodworking Machinery.

Federal Standards:
FED-STD-123 - Marking for Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Commercial Item Descriptions as outlined under General Information in the index of Federal Specifications, Commercial Item Description and Standards. The index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.

(Single copies of this specification and other Federal specifications and Commercial Item Descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, D.C.; Atlanta, GA; Chicago, Il; Kansas City, MO; Fortworth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

Military standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Material (ASTM) Standards:

E 18 - Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations herein are for the convenience of identification and are not intended to preclude the purchase of blades that are otherwise conforming to this specification. All dimensions are in inches unless otherwise specified.

3.2 Material.

3.2.1 Blades. Saw blades shall be made of rolled saw steel which shall be heat-treated to the specified hardness requirements and perform the specified bending tests. The steel shall be free from cracks, segregation, inclusions, seams, hammer marks, high spots or other imperfections that may affect serviceability, durability, or safety. When specified, except for types III, VIII, style B, IX, and XV (see 6.1), saw blades shall be of alloy steel containing chromium and nickel. The chromium plus nickel content shall be 16% or greater to prevent corrosion.

3.2.2 Handles.

3.2.2.1 Wooden handles. Wooden handles shall be made of thoroughly seasoned (not over 12 percent moisture) straight-grained, clear hardwood, free from any imperfections which may affect serviceability, durability or safety. Handles of types I, III, V, IX, X, XIII and XIV saws shall have a hand-hole opening of not less than 3-3/4 inches in length by 1-1/8 inches in width.

3.2.2.2 Metal handles. Metal handles shall be of corrosion-resistant metal or shall have a corrosion-resistant finish that prevents corrosion.

3.2.2.3 Plastic handles. Plastic handles shall be of a suitable fire-resistant or self-extinguishing plastic (see 4.4.4).

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the currentversion before use.

3.2.3 Fastening devices. Fastening devices (e.g., screws, medallions, nuts, rivets, and pins) shall be made of hardened ferrous metals treated, plated or coated for rust resistance or may be of hardened corrosion resistant, or of non-ferrous metals.

3.3 Nominal length. The nominal length of all saws, except type X, shall be the distance between the teeth nearest the ends of the saw blade. The thickness of the cutting edge shall be measured next to but not including the teeth.

3.4 Spring set teeth. Saws with spring set teeth shall have every tooth the same degree; alternate teeth shall be set to the same side of the saw. Ample clearance shall be provided on each side of the blade of all saws to prevent binding under service conditions.

3.5 Points and teeth per inch. Points and teeth per inch shall be measured as shown on figure 1 (see 6.1).




Figure 1. Points and teeth per inch.

3.6 Tolerances. When no tolerances are specified, a plus or minus tolerance of 10 percent will be permitted; a plus or minus tolerance of 0.003 inch will be permitted in uniform thickness; and a plus or minus one point per inch will be permitted in points per inch.

3.7 Thickness. Unless otherwise specified, the blades shall be of uniform thickness.

3.8 Finish.

3.8.1 Wood handles. Wood handles shall have polished and rounded edges. All exposed surfaces including the inside of the handgrip shall be finished smooth, stained and either wax-coated or lacquered with a durable weather-resistant lacquer or varnish.

3.8.2 Metal and plastic handles. Metal and plastic handles shall have smooth grips and be free from sharp edges and projections.

3.9 Marking for identification. Each saw (including all items within a set or kit) shall be marked with the manufacturer's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All marking shall be engraved, etched, molded, or stamped directly on the saw's surface in such a manner that the marking will be permanent to the extent that it remains clearly legible throughout the life of the saw.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.9.1 Special marking. When specified in the contract or purchase order (see 6.1), special marking shall be permanently applied in accordance with the specified specifications. Special marking shall not damage or adversely impact the serviceability, durability, or safety of the saw.

3.10 Type I, back saw. The type I saw blade shall be securely held in a "U" shaped reinforcing steel back 1/2 to 3/4 inch wide with a minimum thickness of 0.060 inch. The reinforcing steel back shall extend the full length of the back of the blade. The blade shall be hardened and tempered to a Rockwell "C" hardness of 43 to 52. The teeth shall be spring set, bevel-filed, and adapted for both crosscutting and ripping. The handle shall be of hardwood and secured to the blade by means of three screws and nuts. The saws shall be similar to figure 2 and shall conform to the dimensions shown in table I for the length specified (see 6.1).

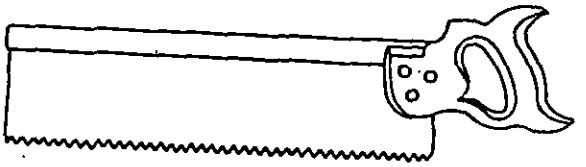


Figure 2. Type I, back saw.

TABLE I. Type I, back saw.

Length of cutting edge (Inch)	Width under back (Inches)		Points per inch	Thickness of blade (Inch)	
	min.	max.		min.	max.
12	2-3/4	3-7/8	13	0.025	0.038

3.11 Type III, cable saw. The type III saw shall consist of a flat tapered saw blade toothed on two edges for cutting cables. The coarse-pitch edge shall have a normal set for fast woodcutting and the fine-pitch edge may be set or un-set. The handle shall be of hardwood or durable plastic and shall be secured by not less than three screws and nuts. The blade shall be heat treated and tempered to a Rockwell "C" hardness of 42 to 58. Cable saws shall be similar to figure 3 and shall conform to the dimensions shown in table II.




Figure 3. Type III, cable saw

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

TABLE II. Type III, cable saw

Length of cutting edge (Inches)	Width of blade (Inches)		Points per inch	Thickness of blade (Inch)	
	Point	Handle		min.	max.
12	1-1/2	2	8 and 13	0.039	0.058

3.12 Type IV, compass saw. The type IV saw blade shall be tapered in width and of uniform thickness throughout the length of the cutting edge. The blade shall be either of uniform thickness or tapered. The blade shall be hardened and tempered to a Rockwell "C" hardness of 43 to 49. The teeth shall be spring set, filed, and adapted for both cross-cutting and ripping. The handle shall be made of thoroughly seasoned, straight-grain hardwood, or of plastic conforming to 3.2.2, and shall be secured to the blade by either two screws and nuts or one screw and nut and one pin. The handle shall provide for interchangement of blades. The saw shall be similar to figure 4 and conform to the dimensions shown in table III.

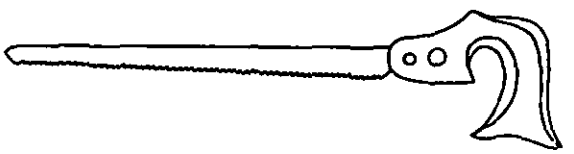


Figure 4. Type IV, compass saw.

TABLE III. Type IV, compass saw.

Length of cutting edge (Inches)	Points per inch	Thickness of cutting edge (Inch)		Blade width at handle (Inch)	
		min.	max.	min.	max.
12	9	0.042	0.065	1	1-3/8

3.13 Type V, crosscut saw. The type V saw blade shall be of the skew or straight back type as specified (see 6.1), and taper ground. Blades at the tooth edge shall be 0.032 inch to 0.044 inch, and of the same thickness along this entire length. Blades shall be uniformly tapered along the back edge. Blade thickness at the back edge shall be a minimum of 0.002 inch less than the tooth edge. The teeth shall be alternately spring set in accordance with the manufacturer's standard practice, and bevel filed for cross-cutting. The blade shall be hardened and tempered to a Rockwell

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:36Z
Check the source to verify that this is the current version before use.

"C" hardness of 43 to 52. The handle on 24 and 26 inch saws shall be secured by at least 4 screws, or 3 screws and one medallion. The handles on saw sizes smaller than 24 inches shall be secured by at least 3 screws, or 2 screws and one medallion. The handles shall be firmly secured to the blade so as not to rock or show other signs of looseness under actual or simulated service conditions. Type V saws shall be similar to either figure 5 or 6 and conform to the dimensions shown in table IV for the length specified (see 6.1). The crosscut saws shall be capable of withstanding the bending test of 4.4.3.




Figure 5. Type V, crosscut, skew back.

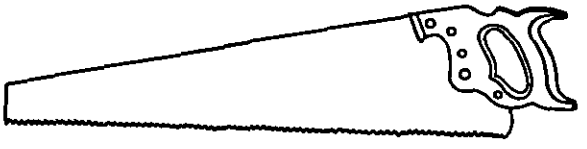


Figure 6. Type V, crosscut, straight back.

TABLE IV. Type V, crosscut saw.

Length of cutting edge (+ 1-3/8 or - 1/2) (Inches)	Points per inch	Width (min.) (Inches)	
		Butt	Point
20	10	4-1/2	1-1/4
24	10	5-3/8	1-1/4
26	6 or 8	5-3/4	1-1/2

3.14 Type VII, dovetail saw. The type VII saw blade shall be securely held in a "U" shaped reinforcing steel back 1/2 to 3/4 inch wide with a minimum thickness of 0.060 inch. The reinforcing steel back shall extend the full length of the back of the blade. The blade shall be hardened and tempered to a Rockwell "C" hardness of 46 to 52. The teeth shall be spring set, bevel-filed, and adapted for both cross-cutting and ripping. A handle of the straight grip type shall be securely fastened to the reinforcing back. The dovetail saw shall be similar to figure 7 and shall conform to the dimensions shown in table V for the length specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.




Figure 7. Type VII, dovetail saw.

TABLE V. TYPE VII, dovetail saw

Length of blade (+ 1-3/8 or - 1/2) (Inches)	Width under back (Inch)	points per inch	Thickness of blade (Inch)	
			Min.	Max.
8	1-5/8	16	0.018	0.025
10	1-5/8	16	0.018	0.025

3.15 Type VIII, Keyhole saw.

3.15.1 Style A, woodcutting. The type VIII, style A saw blade shall be of tapered width and uniform thickness through out the length of the cutting edge. The blade shall be either of uniform thickness throughout or tapered. The blade shall be hardened and tempered to a Rockwell "C" hardness of 44 to 49. The teeth shall be spring set, and adapted for both cross-cutting and ripping. The handle shall be made of thoroughly seasoned, straight-grain hardwood or of plastic conforming to 3.2.2.3, and shall be secured to the blade by means of either two screws and nuts, or one screw and nut and one pin. The handle shall provide for interchangement of blades. Saws shall be similar to figure 8 and conform to the dimensions shown in table VI.




Figure 8. Type VIII, Style A, Keyhole saw, woodcutting.

TABLE VI. Type VIII, style A, keyhole saw. woodcutting.

Length of cutting edge (Inches)	Points per inch	Thickness of cutting edge (Inch)		Blade width at handle (Inch)	
		min.	max.	min.	max.
10	10	0.042	0.060	1/2	13/16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.15.2 Style B, metal-cutting. The type VIII, style B, saw shall consist of a pistol-grip type handle and detachable metal-cutting blade. Blade teeth shall have a Rockwell "C" hardness of 58 to 62. The saw shall be capable of passing the metal cutting test of 4.4.2.2. The pistol grip handle shall be designed to position, lock and cut with the blade in each of four different cutting positions (up, down, right, and left). The saw shall be similar to figure 9. All blades shall conform to the dimensions of figure 10 and table VII.

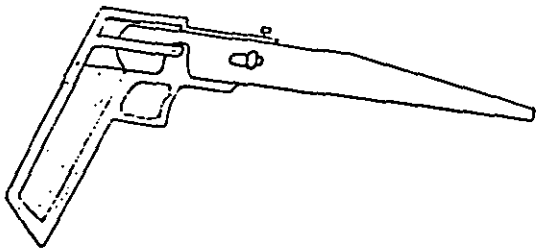


Figure 9. Type VIII, style B, keyhole saw, metal-cutting.

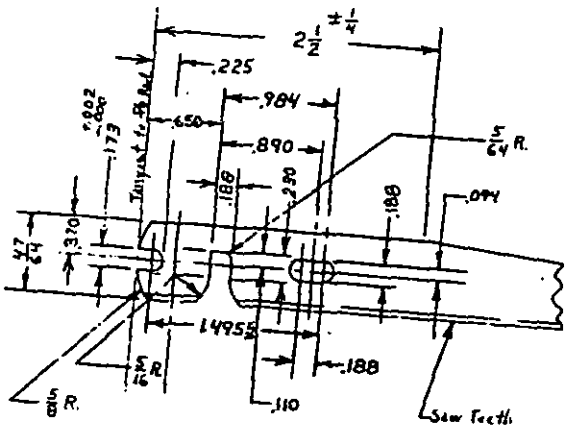


Figure 10.- Type VIII, Style B, standard blade dimensions.

TABLE VII, Type VIII, style B, keyhole saw, metal-cutting.

Overall length of blade (+ or - 1/8) (inches)	Length of cutting edge, beyond handle (min.) (inches)	Points per inch	Blade thickness (inch)		Width of heel (inch)
			min.	max.	
7-1/2	5-1/2	19	0.025	0.040	3/4
7-1/2	5-1/2	25	0.025	0.040	3/4

3.16 Type IX, metal-cutting. The type IX saw blade shall be of the straight back type and either taper-ground or taper and hollow ground. The blade shall be of uniform thickness throughout the length of the cutting edge. The back of the saw shall be of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

thickness throughout or tapered from the handle to the point. The blade shall be hardened and tempered to a Rockwell "C" hardness of 52 to 58. The saw shall be capable of withstanding the metal-cutting test of 4.4.2.1. The teeth shall not be set, but shall be milled straight across. The handle shall be made of hardwood and shall be securely fastened to the blade by means of either three or four screws and nuts. The type IX saw shall be similar to figure 6 and conform to the dimensions shown in table VIII.

TABLE VIII. Type IX, metal-cutting saw.

Length of cutting edge (+1-3/8 or -1/2) (Inches)	points per inch	Thickness of cutting edge (Inch)		Thickness of back at handle (Inch)		Thickness of back at point (Inch)		Width (Inches)	
		min	max	min	max	min	max	min	max
18	15	0.038	0.049	0.032	0.049	0.022	0.025	5-1/4	1-9/16

3.17 Type X, miter box saw. The type X saw blade shall be securely held in a "U" shaped reinforcing steel back 3/4 to 1 inch wide with a minimum thickness of 0.109 inch. The reinforcing steel back shall extend the full length of the back. The blade shall be hardened and tempered to a Rockwell "C" hardness of 46 to 52. The teeth shall be spring set, bevel-filed and adapted for both crosscutting and ripping. The handle shall be of hardwood and securely fastened to the blade by not less than three screws and nuts. Unless otherwise specified (see 6.1), the saw shall be similar to either figure 11(a) or 11(b), and conform to the dimensions shown in table IX. The functional length of the saw shall be at least 23-inches in two places measured as follows: (1) along the cutting edge, and (2) from the far end of the saw, up to the start of the wooden handle.




Figure 11(a). Type X, miter box saw.



Figure 11(b). Type X, miter box saw.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

TABLE IX. Type X, miter box saw blade.

Full length of blade (+ 2 or - 3/4) (Inches)	Width under back (Inches)	Points per inch	Thickness of blade (Inch)	
		min.	min.	max.
26	4	11	0.037	0.043

3.18 Type XI, nested saw. The type XI saw shall consist of three blades and detachable hardwood or plastic handle similar to figure 12. The saw shall be provided with a device for quickly and securely attaching the handle to the blade. The nest shall consist of a handle and a keyhole saw blade, compass saw blade, and nail-cutting saw blade. The handle end of each blade shall be designed to fit the handle. The keyhole saw blade shall conform to the 10-inch type VIII keyhole saw (see 3.15.1), and the compass saw blade to the 12-inch type IV compass saw (see 3.12). The nail-cutting saw blade shall be hardened and tempered to a Rockwell "C" hardness of 46 to 52. The nail-cutting blade shall be capable of withstanding the metal-cutting test of 4.4.2.2. The blade shall be of uniform thickness throughout or tapered. The teeth shall be set and milled straight across. The nail-cutting saw blade shall conform to the dimensions shown in table X.

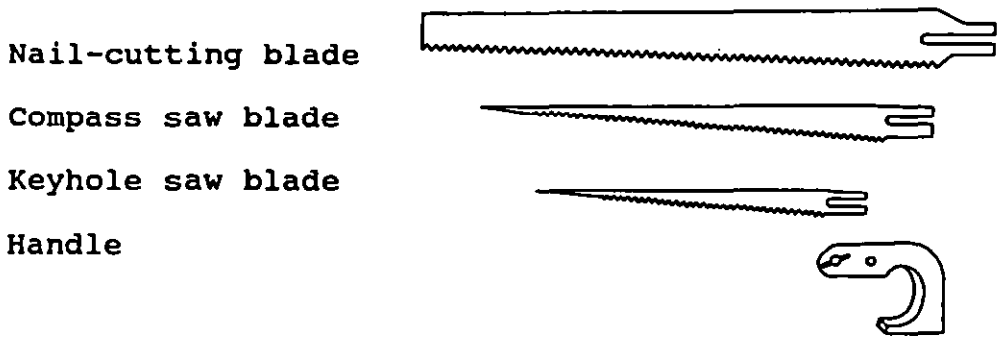


Figure 12. Type XI, nested saw (nail-cutting, keyhole and compass blades with handle).

TABLE X. Type XI, nail-cutting blade for nested saw.

Length of cutting edge (Inches)	Points per inch	Thickness of cutting edge (uniform or tapered) (Inch)		Thickness of back at point (tapered only) (Inch)		Blade width at handle (Inches)	
		min.	max.	min.	max.	min.	max.
14 to 18	11	0.042	0.048	0.032	0.035	1-7/8	2-3/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

3.19 Type XIII, pruning saw. The type XIII saw shall have a straight tapering blade with a double horn hardwood handle secured by three screws and nuts. The blade shall have teeth on both edges and shall be of uniform thickness throughout its length. The teeth on one edge shall be bevel-filed and spring set for crosscutting with eight points per inch. The other edge shall have teeth known as lumberman style. The blades shall be hardened and tempered to a Rockwell "C" hardness of 46 to 52. The type XIII saw shall be similar to figure 13 and conform to the dimensions shown in table XI.




Figure 13. Type XIII, pruning saw.

TABLE XI. Type XIII, pruning saw blade.

Length of blade (+ 1-3/8 or - 1/2) (Inches)	Thickness of cutting edge (Inch)		Width at point (Inch)		Width at handle end (Inches)	
	min.	max.	min.	max.	min.	max.
18	0.040	0.046	3/4	1	2-3/8	3

3.20 Type XIV, rip saw. The type XIV saw shall conform to type V, crosscut saws (see 3.13) except the blade dimensions shall be as specified in table XII. The teeth shall be filed straight across and adapted for ripping. The saw shall be similar to either figure 5 or 6, and the blade shall conform to the dimensions shown in table XII. The rip saw shall be capable of withstanding the bending test of 4.4.3.

TABLE XII. Type XIV, rip saw blade.


Length of cutting edge (+ 1-3/8 or - 1/2) (Inches)	Points per inch	Width (min.) (Inches)	
		Butt	Point
26	5-1/2	5	1-1/2

3.21 Type XV, adjustable handle saw. Unless otherwise specified (see 6.1), each adjustable handle saw shall be furnished with three blades (one each of styles A, B, and C, see 3.21.4, 3.21.5, and 3.21.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

Each blade shall have a cutting edge not less than 11-inches long, beyond the handle. The type XV saw shall be similar to figure 15.

3.21.1 Type XV handles. The blade-holding device of the handles shall be designed to securely hold either of the blade ends shown in figure 14 without any blade movement in any direction when the thumb-nut is tightened. Handles shall be of plastic or cast metal. The handles shall be of the pistol-grip design with a swiveling chuck and locking pin which permits the blade to be rotated through 360 degrees and securely locked in at least eight positions at equal intervals of 45 degrees. The chuck shall be designed to accommodate styles A, B, and C blades. The chuck shall be of metal or plastic with a natural finish. The finished surfaces of the clutch, locking pin and knurled nut shall be made of noncorrosive metal, or shall have a corrosive-resistant finish. The plastic handle shall pass the flammability test of 4.4.4. The handles shall be similar to that shown in figure 15.

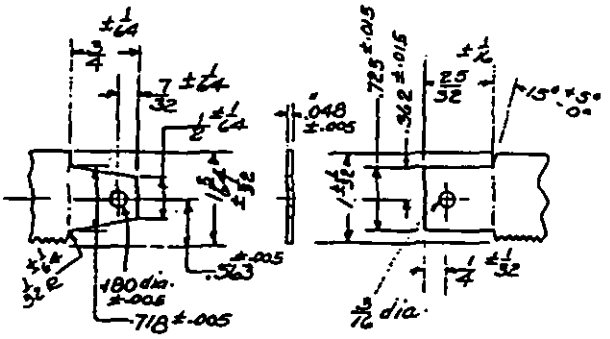

(dimensions are in inches)
Figure 14. Type XV, blade handle ends.

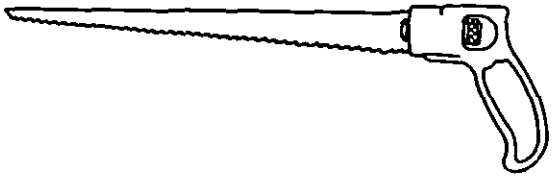


Figure 15. Type XV, adjustable handle.

3.21.2 Styles A, B and C blades. Styles A, B, and C blades shall be of uniform thickness throughout the length of the cutting edge and back.

3.21.3 Handle end of the blades. The handle end of the style A, B, and C blades shall be interchangeable between the plastic and

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

cast metal handle and shall be capable of being securely held in the blade-holding device of either handle without blade movement in any direction. The handle end of the style A, B, and C shall conform to either of the ends shown in figure 14, or may be of a different style, or may vary from the dimensions shown, provided the handle end can be securely held in either the plastic or metal handle.

3.21.4 Style A, compass blade. The style A adjustable handle saw blade shall have a Rockwell "C" hardness of 44 to 49. The teeth shall be formed, set and filed. The blade shall have 7 teeth (8 points) per inch.

3.21.5 Style B, Keyhole blade. The style B adjustable handle saw blade shall have a Rockwell "C" hardness of 58 to 62 and shall contain 24 teeth (25 points) per inch. The blade shall be capable of withstanding the cutting test specified in 4.4.2.1.

3.21.6 Style C, nail saw blade. The style C adjustable handle saw blade shall have a Rockwell "C" hardness of 58 to 62 and shall contain 10 teeth (11 points) per inch. The blade shall be capable of withstanding the metal cutting test specified in 4.4.2.2.

3.22 Workmanship. The saw blades shall be true and straight throughout their length and width. The teeth shall be sharp, suitable for cutting, and uniform in (depth) height or set as applicable. Except for the teeth, blades shall be free from burrs, pits, discoloration, sharp edges, rust or any blemishes that might impair appearance, durability, safety or serviceability. Handles shall afford a secure but comfortable hand-grip for sawing.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that material and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or, if none, in accordance with this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

4.2 Sampling Procedures. Sampling procedures shall be in accordance with MIL-STD-105.

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any non-conformance in design, construction, material, finish, coating, workmanship, and marking. Defects are listed in table XIV. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 percent defective. The sample unit shall be one saw.

TABLE XIV. Classification of defects.

Categories	Defects
Major:	
101	Type, style and (if applicable) number of points per inch of saw not as specified.
102	Blade defective; evidence of cracks, segregation, inclusion, seams, high spots, or hammer marks; blade crimped or warped.
103	Teeth not spring set, teeth not uniformly set, not adapted for both cross-cutting and ripping, or teeth fail to provide ample clearance on either side of blade, or tooth set extends too deep causing broken teeth, cracked teeth, or other defects.
104	Teeth not sharpened as specified; evidence of nicks, burrs, dull or incompletely formed teeth; teeth improperly formed or not even and of uniform height.
105	Reinforcing back not required material, not secured to blade, fails to extend the full length of the blade.
106	Blade width not tapered (types III, IV, VIII, and XIII).
107	Handle defective, fails to securely hold the saw blades, saw blades not readily interchangeable, or handle not the required style or material; evidence of cracks, checking, soft spots, heavy knots; wood not straight-grained.
108	Blade not corrosion resistant (if applicable)
Minor:	
201	Marking, manufacturer's name or trade mark missing, illegible, or not permanent.

4.3.2 Dimensional examination. Each sample unit shall be examined for any non-conformance with dimensional requirements. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 percent defective. The sample unit shall be one saw.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1 through 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

4.4.1 Hardness. Each sample unit shall be subjected to a hardness test in accordance with ASTM E-18 to determine conformance with the applicable specified requirements. Except for type XV, style C, the nail saw blade shall be subject to a hardness test at the cutting edge only. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 percent defective. The sample unit shall be one saw blade.

4.4.2 Metal-cutting.

4.4.2.1 Types IX and XV, style B. Types IX and XV, style B, metal-cutting hand saws shall be subjected to a performance test as follows: The saw shall make a 24-inch cut in No. 16 gage (0.058) hot rolled sheet steel ASTM A 569 freely and shall show no damage to the teeth after completion of the cut. The inspection level shall be S-1 with an acceptable quality level (AQL) of 4.0 percent defective. The sample unit shall be one saw.

4.4.2.2 Type VIII, style B, type XI, and type XV, style C. Type VIII, style B, type XI, and type XV, style C saws shall be subjected to the following test: The saw shall cut through a piece of 2- by 4-inch lumber and four 16-penny common wire nails driven into it at a 45 degrees angle to the cut without damage to the blade. The inspection level shall be S-1 with an acceptable quality level (AQL) of 4.0 percent defective. The sample unit shall be one saw.

4.4.3 Bending test (types V and XIV). The blades of type V and XIV saws shall be subjected to the following test: The saw blades shall be bent slowly around a wooden mandrel 12-inches in diameter until the handle end of the saw is at 90 degrees with the point end; the bend shall be made half-way from the point to the handle. The saw shall be bent alternately through three cycles and shall show no permanent set greater than 1/8-inch in the length of the blade. After the bending test has been successfully completed, the teeth of the saw shall be brought to lie adjacent to the edge of a straight metal test bar of at least 28-inches long. The saw blade shall be clamped (using a C clamp) to the test bar within one inch of the butt end of the blade having the bowed side (if any) of the blade outwardly from the test bar. The permanent set shall then be measured at the point end of the saw blade, and if the permanent set exceeds 1/8-inch, or if there are cracks, the saw shall be considered as non-conforming. The inspection level shall be S-4 with an acceptable quality level (AQL) of 2.5 percent defective. The sample unit shall be one saw.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

4.4.4 Flammability test. The test handle shall be clamped in a support with the handle extended outward in a horizontal position. Under the handle, a piece of 10-mesh Bunsen burner gauze approximately 5 inches square shall be clamped, in a horizontal position, 1/4-inch below the bottom of the handle. An efficient flame 1/2 to 3/4-inch in height, shall be adjusted so that the flame tip will just contact the specimen when placed under the free end of the handle. At the end of 30 seconds the flame shall be removed and the sample allowed to burn. The rate of travel of the flame shall be determined from the time required for the flame to travel the length of the handle after the removal of the bunsen burner. In case the handle does not continue to burn after the first ignition, the burner shall be replaced under the free end for a period of 30 seconds immediately following the extinction of the flame. If the handle does not continue to burn until the flame has reached the blade end of the handle after the second ignition, the sample shall be considered self extinguishing. If the sample continues to burn, the burning rate shall not exceed 2-inches per minute. The inspection level shall be S-1 with an acceptable quality level (AQL) of 4.0 percent defective. The sample unit shall be one saw.

4.5 Inspection and preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in this specification. Defects shall be scored in accordance with table XIV. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 with an acceptable quality level (AQL) of 2.5 per hundred units. The sample unit shall be one container.

TABLE XIV. Classification of preparation for delivery defects.

Examine	Defects
Marking (exterior and interior)	Omitted; incorrect; illegible; improper, size, location, sequence, or method of application.
Materials	Any component missing, or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing. Unless otherwise specified (see 6.1), the saws shall be preserved, packaged, and packed in accordance with PPP-P-40. The level of preservation and packaging shall be A or C and the level of packing shall be A, B, or C as specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.

5.2 Marking.

5.2.1 Civil agencies. In addition to markings required by the contract or order, the unit packages and shipping containers shall be marked in accordance with FED-STD-123.

5.2.2 Military activities. In addition to markings required by the contract or order, the unit packages and shipping containers shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options herein and include the following information in procurement documents.

(a) Title, number and date of this specification.
(b) Type, style, and length of saws required (see 1.2.1, 1.2.2 and applicable table of dimensions).
(c) State when saw blades, except for types III, VIII style B, IX and XV, shall be corrosion resistant chrome-nickel alloy steel (see 3.2.1).
(d) Special markings of saws, if required (see 3.9.1).
(e) Whether skew or straight back type saw required (see 3.13 and 3.20)
(f) Specify if preference of (a) or (b) style saw is required (see 3.18 and figure 11).
(g) When other than specified, style of blade required with each type XV saw handle (see 3.21).
(h) Levels of preservation, packaging, and packing required (see 5.1).

6.2 Supersession data. The classification of saws covered in this specification corresponds to those covered in Federal Specification GGG-S-0065b (GSA-FSS) as follows:

GGG-S-0065b (GSA-FSS)	GGG-S-65C
Type I.- Back.	Type I.- Back.
Type III.- Cable.	Type III.- Cable.
Type IV.- Compass.	Type IV.- Compass.
Type V.- Crosscut.	Type V.- Crosscut.
Type VI.- Docking.	Type VI.- Deleted.
Type VII.- Dovetail.	Type VII.- Dovetail.
Type VIII.- Keyhole.	Type VIII.- Keyhole.
Style A.- Woodcutting.	Style A.- Woodcutting.
Style B.- Metal-cutting.	Style B.- Metal-cutting.
Type IX.- Metal-cutting.	Type IX.- Metal-cutting.
Type X.- Miter Box.	Type X.- Miter Box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:36Z
Check the source to verify that this is the current version before use.

Type XI.- Nested.	Type XI.- Nested.
Type XII.- Plumbers'.	Type XII.- Deleted.
Type XIII.- Pruning.	Type XIII.- Pruning
Type XIV.- Rip.	Type XIV.- Rip.
Type XV.- Adjustable handle.	Type XV.- Adjustable handle.
Style A.- Compass blade.	Style A.- Compass blade.
Style B.- Keyhole blade.	Style B.- Keyhole blade.
Style C.- Nail-saw blade.	Style C.- Nail-saw blade.

MILITARY INTEREST:

Military Coordinating Activity
Army - GL

Custodians
Army - GL
Air Force - 99

Review Activity
Air Force - 84

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing Activity
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:36Z
Check the source to verify that this is the current version before use.