MIL-C-40008D
19 November 1984
SUPERSEDING
MIL-C-40008C
30 July 1974

MILITARY SPECIFICATION

CABINET, SAW AND FILE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of cabinet used for storage of band saw supplies.

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-P-17802	-	Padlock and Padlock Sets, Low Security, Key Operated, Regular (Open) Shackle.
MIL-B-45977	-	Bins, Cabinets, Shelving, and Worktables, Packaging of.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Center, ATTN: SMCAR-ETS (R), Rock Island, IL 61299-7300 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 3460

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-H28	-	Screw Thread Standards for Federal Services.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-130	-	Identification Marking of US Military Property.
MIL-STD-889	-	Dissimilar Metals.
MS35647	-	Padlock, Key Operated.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DOD adopted shall be the issue listed in the current DODISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A366	-	Steel Sheets, Carbon, Cold Rolled, Commercial Quality.
ASTM A569	-	Steel, Carbon (0.15 Maximum Percent), Hot Rolled Sheet and Strip, Commercial Quality.
ASTM D3951-82	-	Standard Practice for Commercial Packaging.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

* (Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2.1), the contractor shall furnish one complete storage cabinet for first article inspection. The first article may be either a preproduction model or an initial production item which conforms to the requirements of this specification. In either case, the approved first article and the production items shall be identical and in accordance with the terms of the contract. Approval of the first article shall not relieve the contractor of the responsibility to furnish equipment in accordance with the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

3.2 Design. The cabinet shall be new and of the manufacturer's current design meeting the requirements specified herein. The general appearance of the cabinet shall be as shown in Figure 1. All dimensions shown are in inches.

* 3.3 Material. Materials not specifically designated herein or in the contract shall be of a quality commensurate with commercial practice within the producing industry, shall be suitable for the intended purpose in the design of the end item, and shall meet all requirements specified herein. Materials shall be free from defects which would adversely affect the performance or maintainability of the individual components or the overall assembly. When dissimilar metals are used in contact with each other, suitable protection against galvanic corrosion shall be applied in accordance with MIL-STD-889.

* 3.3.1 Reclaimed materials. The contractor is encouraged to use reclaimed materials for fabricating new parts without jeopardizing the chemical and physical properties, design integrity, and intent of the materials originally selected or specified. The reclaimed materials shall have been reprocessed, remanufactured, or recycled in a manner that shall restore them to the same chemical composition and physical properties as the materials originally selected for use. It shall not be permissible to use reclaimed parts as is, or rebuilt from scrap or other used equipment.

* 3.3.2 Steel. Sheet and strip steel shall conform to ASTM A366 or ASTM A569. Cold rolled or hot rolled steel, pickled and oiled, shall be used for the tops. Stretcher or roller-leveled steel shall be used for the back, side panels, and doors. The minimum gage for the steel used in construction of the cabinet components shall be as specified in Table I.

TABLE I. Gage numbers.

Part	Manufacturers Standard Gage No.
Bottom and top	18
Back and side panels	18
Doors	18
Door stiffening panels	20
Door frame side member	18
Door frame top and bottom member	16
Rack side members	18
Rack shelves	18
Rack shelf partitions	18
Rack top support	18

* 3.4 Construction. The cabinet shall be furnished assembled or unassembled as specified (see 6.2.1). When assembled construction is specified, the parts shall be assembled by either welding or bolting. Spot welding shall not exceed three inch intervals except, when restricted by cabinet design, the welds may vary up to five inch intervals. When unassembled shipment is specified, the parts shall be assembled with bolts. All bolt holes shall align with those in mating parts. Bolts shall be spaced at not more than 12 inch intervals on all vertical joints. Bolts, screws, and welds shall not show on the front of the cabinet, whether assembled or unassembled. The top, bottom, and shelves shall be level and parallel within 1/64 of an inch. The sides, back, and front shall be vertical and parallel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

* 3.4.1 Welding, brazing, and soldering. Welding, brazing, and soldering shall be of a quality which shall sustain all requirements of the welded, brazed, or soldered parts. These operations shall not be employed as repair measures for defective parts.

3.4.2 Fastening devices. All screws, pins, bolts, and fastening devices shall be provided with means for preventing loss of tightness and adjustment. All parts subject to removal or adjustment shall not be swaged, peened, staked, or otherwise deformed.

3.4.3 Protective finish. All fastening devices shall be made rust resistant by metal plating or phosphate treatment.

* 3.4.4 Interchangeability. All parts shall be manufactured to definite standards, clearances, and tolerances in order that any such parts of a particular type or model may be replaced, interchanged, and adjusted without modification of the replacement parts or any other parts of the unit. When practical, all parts shall be permanently and legibly marked in accordance with MIL-STD-130.

3.4.5 Surfaces. All castings, molded parts, stampings, and welded parts shall be clean and free of sand, dirt, fins, sprues, scale, flux, and other harmful or extraneous materials. External surfaces shall be smooth and all edges shall be rounded or beveled.

* 3.4.6 Threads. Threads shall conform to FED-STD-H28 and the applicable Detailed Standard section referenced therein.

* 3.5 Product characteristics. The cabinet shall provide storage for band saw supplies and accessories, both in the original packages and as removed from the machine. The cabinet shall support a total load of 1,200 pounds without damage or distortion of any component. The bottom shelf shall support a minimum load of 240 pounds. The other five shelves shall support a minimum of 160 pounds each. The band hanger at the top of the rack shall support a minimum of 160 pounds. The maximum capacity of each shelf shall be stamped, embossed, or etched in bold numerals and letters, not less than 1/4 inch in height, so the maximum capacity of each shelf shall remain permanently legible on the face of each shelf flange. The maximum capacity of each shelf shall be located on the flange to be easily noticeable during use of the cabinet.

3.5.1 Cabinet dimensions. The minimum over-all cabinet dimensions shall be 30 inches in width, 15 inches in depth, and 78 inches in height.

3.6 Components. The storage cabinet shall consist of the principal components specified in 3.6.1 thru 3.6.7.

3.6.1 Rear panel. The vertical edges shall be offset to fit under the rear vertical flanges of the side panels. The rear panel shall be provided with a means of supporting the bottom securely without the use of bolts and nuts.

3.6.2 Side panels. The side panels shall be flanged inward not less than 3/4 inch at the top and the back. The front vertical edge shall be flanged not less than 1/2 inch. The side panels shall be provided with means of supporting the bottom securely without using bolts and nuts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

3.6.3 Door frame. The door frame side members shall be steel angles or pilasters formed from sheet steel. The top and bottom tie members shall be formed into channels, with the bearing ends offset by turning back the extended channel web and attaching it securely to each side member with at least two countersunk rivets or by welding. The bottom flanges of the top tie member shall be formed downward not less than 1/2 inch and shall serve as a doorstop. The bottom tie member shall not be less than 2-1/4 inches high and shall serve as the base plate. The top of the tie member shall be formed upward not less than 1/2 inch and shall fit behind the front flange of the bottom.

3.6.4 Top. The top shall be flanged downward 1/2 inch at the back for rigidity and shall be completely concealed under flanges of the sides, back, and the front frame.

3.6.5 Bottom. The bottom shall be flanged downward not less than 1/2 inch on all four edges for rigidity. The bottom shall be supported at the sides and at the back with bolts and nuts. The front flange shall rest on the base plate and shall be secured by not less than two countersunk bolts with nuts. The front flange shall serve as the doorstop.

3.6.6 Doors. Double doors shall be used on the cabinet. Each door shall be reinforced with flanged edges. A stiffening panel shall be welded to the back of each door and shall extend from the top to the bottom of the door. The left-hand door shall be provided with a rigid lever handle and a suitable means for securely interlocking with the right-hand door. The two vertical edges of the right-hand and the hinged edge of the left-edge of the left door shall be flanged to form a 1/2 inch folded door strike for the right door.

3.6.6.1 Hinges. Not less than three hinges shall be provided for each door. One leaf of each hinge shall be secured to the door frame by not less than two countersunk rivets, ground smooth, or by continuous welding on three sides of the hinges. The other leaf shall be secured to the door flange. The hinges shall hold the doors rigidly in alignment. The leaves shall be formed from not less than Manufacturers Standard 16 gage steel and shall be of the full loop, tight-pin, flush-butt type.

3.6.6.2 Door handles. The doors of the cabinet shall be provided with a metal latching device making positive engagement at three points. The latching mechanism shall be controlled by a handle of the automobile or vault type (single wing). Each door shall be provided with one handle. The door handles shall be of either die-cast aluminum, brass, bronze, or zinc alloy.

3.6.6.3 Lock. The doors shall be provided with a means to accommodate a padlock. The padlock shall be furnished with the cabinet and shall conform to the requirements of MIL-P-17802 and MS35647, size 1-3/4 inch width. Each padlock shall be furnished with two keys.

3.6.7 Stock rack. The stock rack shall have a minimum over-all width of 24 inches $\pm$1/4 inch, a minimum depth of 12 inches, and a minimum side height of 53 inches $\pm$1 inch. The stock rack shall be provided with five shelves arranged and partitioned as shown in Figure 1. The partitions shall be equally spaced. The spacing tolerance of each partition and shelf shall be a maximum of $\pm$1/8 inch, non-cumulative. All shelves shall be flanged downward not less than 3/4 inch on all four edges. The front edge of the shelf shall have a double return flange

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

formation. The side members shall extend a minimum of 3/4 inch above the top shelf. A lower extension shall provide support from the floor. A sheet metal hanger for extended bands shall be provided on the top of the rack. The hanger shall be approximately five inches high and have a width and length equal to the top shelf. The ends shall be rounded to a radius approximately equal to its height. Two short flanges in line, approximately 1-1/2 inches high, shall be turned up at the near edge to hold loose bands when hung over the support. Optionally, an angle may be welded to serve the same purpose. The near side only of the support shall be closed in.

* 3.7 Painting. Unless otherwise specified (see 6.2.1), painting and finishing shall be in accordance with the best commercial practice in the industry. Before painting, all surfaces shall be clean and be free of all foreign matter detrimental to painting. At least one coat of primer (or a phosphate or chromate base) and one coat of enamel, or equivalent (i.e., epoxy enamel), shall be applied.

3.8 Product identification. The cabinet shall be marked for product identification in accordance with MIL-STD-130 and, unless otherwise specified (see 6.2.1), shall include the National Stock Number.

3.9 Assembly instructions. When disassembly of the cabinet is specified in the contract, the contractor shall furnish two copies of assembly instructions and parts list with each cabinet. The instructions shall clearly and accurately describe the procedure to follow in assembling and disassembling the cabinet. All major components shall be legibly marked, by stenciling or similar means, on the back surface with the contractor's part number for identification during assembly. The assembly instructions and parts list shall be securely fastened to a component of the cabinet.

* 3.10 Workmanship. Standards of workmanship shall be such as to assure equipment with characteristics found in the best standard commercial units. The cabinet shall be free from all imperfections which could adversely affect appearance, function, and serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. First article inspection shall be applied to the preproduction model or initial production item (see 3.1). Unless otherwise specified (see 6.2.1), first article inspection shall consist of the examination in 4.5 and the test under 4.6. Failure of the first article to pass the examination or the test shall be cause for rejection.

* 4.4 Quality conformance inspection. Unless otherwise specified (see 6.2.1), quality conformance inspection shall be applied to production items offered for acceptance under the contract. Unless otherwise specified (see 6.2.1), quality conformance inspection shall consist of (a) through (c) below. Failure of any item to pass an examination or test shall be cause for rejection of the item.

(a) Product examination (see 4.5).
(b) Test (see 4.6).
(c) Packaging inspection (see 4.7).

* 4.4.1 Sampling. Unless otherwise specified (see 6.2.1), sampling shall be as specified in MIL-STD-105. For product examination (see 4.5) and test (see 4.6), general inspection level II and an AQL of 1.0 percent defective shall be used. For packaging inspection (see 4.7), special inspection level S-4 shall be used with an AQL of 4.0 percent defective. Failure of any sample to pass inspection shall be cause to reject the lot represented.

4.5 Product examination. The cabinets shall be examined to determine compliance with the requirements of Section 3 and the contract. As a minimum, the following characteristics shall be examined:

CHARACTERISTICS	REQUIREMENT PARAGRAPH
Design	3.2
Materials	3.3
Galvanic corrosion protection	3.3
Reclaimed materials when applicable	3.3.1
Steel gage	3.3.2
Construction	3.4
Welding, brazing, and soldering	3.4.1
Fastening devices	3.4.2
Protective finish	3.4.3
Interchangeability	3.4.4
Surfaces	3.4.5
Threads	3.4.6
Cabinet dimensions	3.5.1 and Figure 1
Components	3.6
Rear panel	3.6.1
Side panels	3.6.2
Door frame	3.6.3
Top	3.6.4
Bottom	3.6.5
Doors	3.6.6
Hinges	3.6.6.1
Handles	3.6.6.2
Padlock and keys	3.6.6.3
Stock rack	3.6.7
Painting and finishing	3.7

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

Product identification	3.8
Instructions and parts list	3.9
Workmanship	3.10

A certificate of conformance may be used to satisfy examination requirements when more than a visual or dimensional verification would be required.

4.6 Test.

4.6.1 Capacity test. The cabinet shall be loaded with a total of 1,200 pounds to determine compliance with 3.5. The bottom compartment of the cabinet shall be loaded with 240 pounds of material. The five shelves shall be loaded with 160 pounds (each), distributed as evenly as practicable. The file band hanger at the top of the cabinet shall be loaded with 160 pounds of file bands or similar equipment. The doors shall be closed and the cabinet shall be allowed to stand undisturbed for a period of 24 hours. At the end of this period the cabinet shall be carefully examined. Any malfunction of the latch or doors, or any distortion of the cabinet or shelves, shall be cause for rejection of the cabinet. Any welding failure shall be cause for rejection of the cabinet.

* 4.7 Packaging inspection. Packaging inspection shall be conducted before and after packaging to determine compliance with the requirements of Section 5.

5. PACKAGING

* 5.1 Military preservation, packing, and marking. When specified (see 6.2.1), requirements for Level A preservation and for Levels A and B packing and marking shall be in accordance with MIL-B-45977.

* 5.2 Industrial preservation, packing, and marking. Unless otherwise specified (see 6.2.1), preservation, packing, and marking shall be in accordance with ASTM D3951-82.

6. NOTES

6.1 Intended use. This specification covers a special supply cabinet intended for use in base and field maintenance shops for storage of band saw blades, file bands, polishing bands, band saw accessories, and other supplies. The cabinet compartments provide storage of band saw blades in the original containers as opposed to bulk storage.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number, and date of this specification.
(b) First article when required (see 3.1).
(c) Assembled or unassembled cabinet as required (see 3.4).
(d) Painting and finishing if different (see 3.7).
(e) Product identification if different (see 3.8).
(f) First article inspection if different (see 4.3).
(g) Quality conformance inspection if different (see 4.4).
(h) Sampling when required (see 4.4.1).
(i) Level of preservation, packing, and marking if different (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

6.3 Contract data requirements. Required technical data such as operator's manuals, parts lists, and other instructions for operation and maintenance, as identified on a numbered DD Form 1664, should be specified on a DD Form 1423 incorporated in the contract.

6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:

Army - AL
Air Force - 99

Review activities:

Air Force - 84
DLA-GS

User activities:

Navy - YD

Preparing activity:

Army - AL

Project No. 3460-0076

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

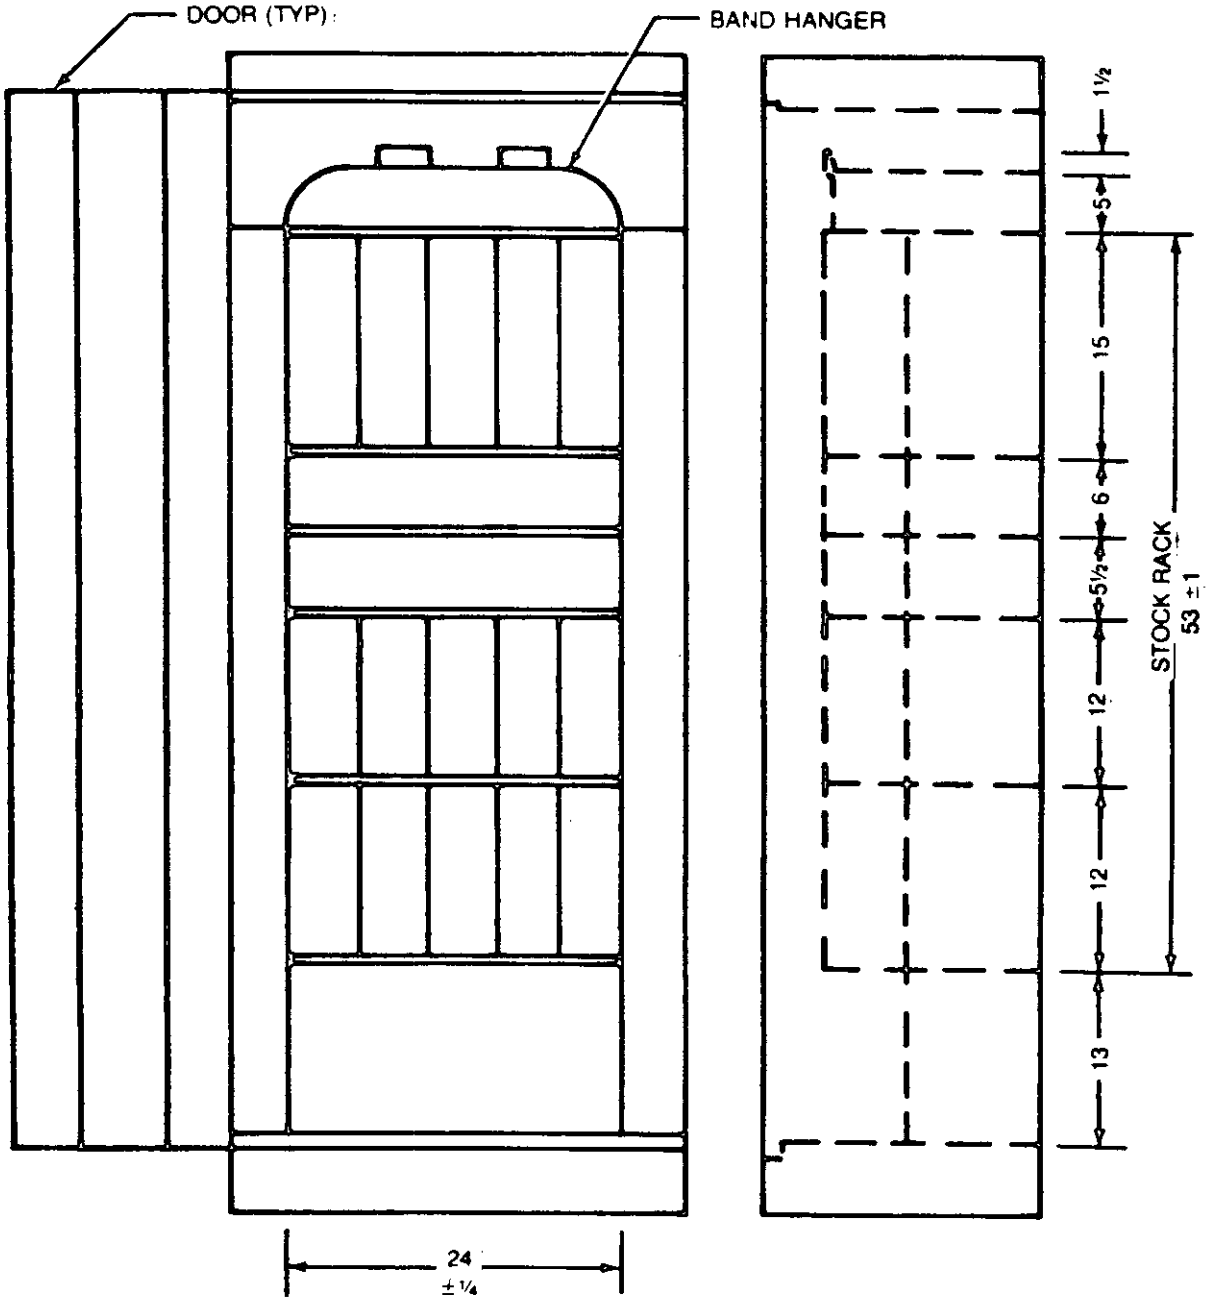


FIGURE 1. Cabinet, saw and file.

☆U.S. GOVERNMENT PRINTING OFFICE: 1984-500-000/40002

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.