
MILITARY SPECIFICATION SHEET

# DUMMY LOADS, ELECTRICAL, TYPE XIV (TAB CONTACT), STRIPLINE, MEDIUM POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the dummy loads described herein shall consist of this document and the latest issue of the Specification MIL-D-39030.

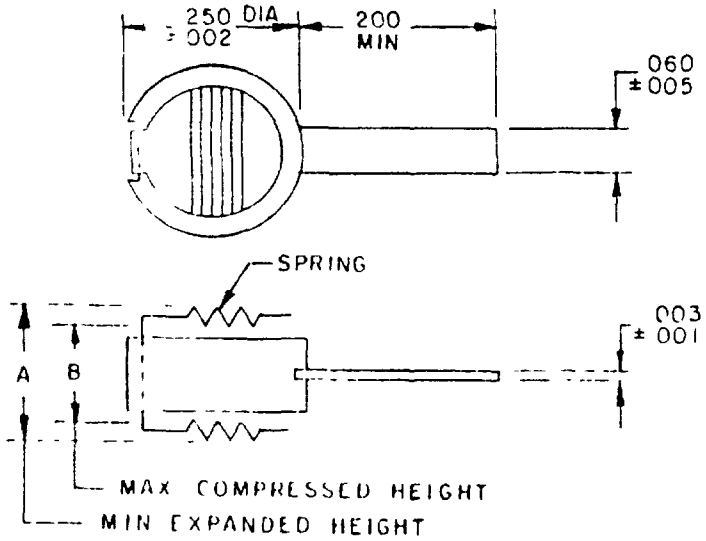


| INCHES | MM |
|---|---|
| 001 | 03 |
| .002 | 05 |
| 003 | .08 |
| 005 | 13 |
| 060 | 1.52 |
| .121 | 3 07 |
| 140 | 3.56 |
| 200 | 5 08 |
| 246 | 6.25 |
| 250 | 6.35 |
| 265 | 6.73 |

| Dash number | A | B |
|---|---|---|
| 01 | 265 | .246 |
| 02 | .140 | 121 |
| 03 | 265 | 246 |

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only and are based upon 1 00 inch = 25.4 mm


FIGURE 1 Dimensions and configuration, part numbers M39030/21-01, -02, and -03



FSC 5985

* U.S. GOVERNMENT PRINTING OFFICE 1981 - 703 023 859

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:55Z
Check the source to verify that this is the current version before use.

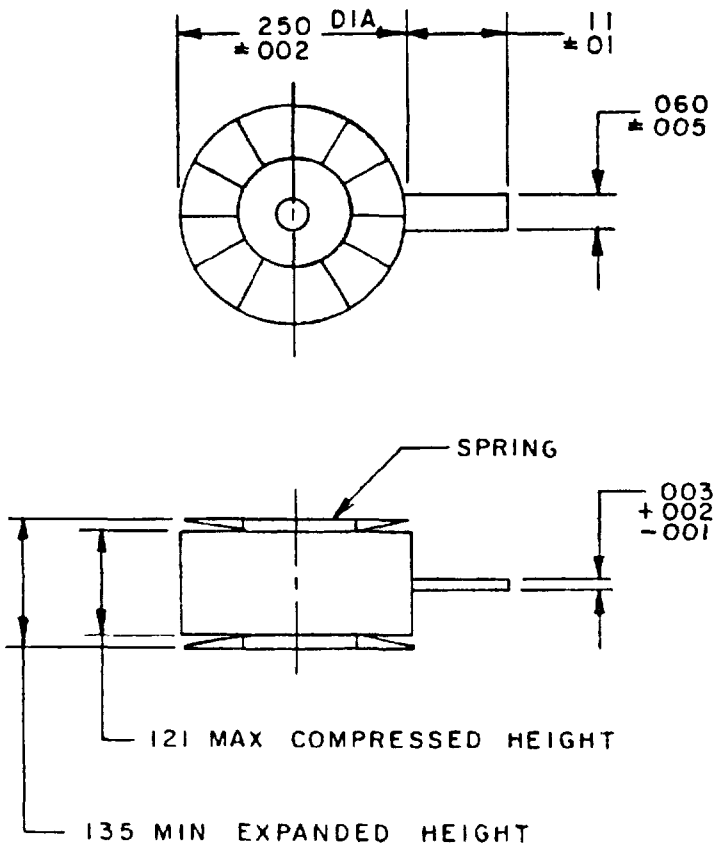


| INCHES | MM |
|---|---|
| 001 | 03 |
| .002 | 05 |
| 003 | .08 |
| 005 | 13 |
| 01 | .3 |
| .060 | 1 52 |
| .11 | 2.8 |
| 121 | 3 07 |
| 135 | 3 43 |
| .250 | 6 35 |

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only and are based upon 1 00 inch = 25.4 mm

FIGURE 2 Dimensions and configuration, part number M39030/21-04



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:55Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

| Dash number | Operating frequency | VSWR (max) | Power handling capability (max) | | Nominal characteristic impedance | Weight (max) | Figure number |
|---|---|---|---|---|---|---|---|
| | | | Average | Peak | | | |
| | GHz | | Watts | Watts | Ohms | Oz | |
| 01 | DC to 3.0 | 1.15 1 1/ | 3 | .1K | 50 | .053 | 1 |
| 02 | DC to 6.0 | (1.20 +.025f) 1 2/ | | .1K | | .053 | 1 |
| 03 | DC to 12.0 | (1.10 +.025f) 1 2/ | | .1K | | .021 | 1 |
| 04 | DC to 12.4 | 1.10 1 (DC to 10.0 GHz) 1.25.1 (10.1 to 12.4 GHz) | 3/ | 3K 3/ | | .021 | 2 |

1/ VSWR is specified at 1.8 and 3.0 GHz.
2/ Where f is the frequency in GHz.
3/ Input power is derated linearly from 100 percent at +75°C to 10 percent at +142°C

REQUIREMENTS.

Dimensions and configurations See figures 1 and 2

Electrical characteristics See table I.

Materials

Body: Brass per QQ-B-626, QQ-B-637, QQ-B-639, or QQ-B-613.

Finish Gold plated per MIL-G-45204, type II, class 2.

Tab contact Brass per QQ-B-626, QQ-B-637, or QQ-B-639 (dash numbers 01 thru 03) or beryllium copper per QQ-C-530 (dash number 04).

Finish Gold plated per MIL-G-45204, type II, class 2

Spring Beryllium copper per QQ-C-530.

Finish Gold plated per MIL-G-45204, type II, class 2.

Weight See table I.

Ambient temperature range

Operating

Dash numbers 01 and 04 - -55°C to +125°C.
Dash numbers 02 and 03 - -65°C to +150°C.

Nonoperating (storage)

Dash numbers 01 and 04 - -55°C to +125°C.
Dash numbers 02 and 03 - -65°C to +150°C.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:55Z
Check the source to verify that this is the current version before use.

Solderability Method 208 of MIL-STD-202, the following details and exception shall apply:

a. Number of terminations of each part to be tested - One contact
b. Special preparation of terminations - No wiping, cleaning, scraping, or abrasive cleaning of the contact shall be performed
c. Depth of immersion - The entire surface of the contact shall be covered
d. Method of mounting - The dummy load shall be mounted onto a heat sink
e. Examination of terminations - There shall be no evidence of pinholes and blistering.

NOTE. This test shall be performed after the visual and mechanical inspection in qualification.

Part number M39030/21-(dash number from table I).

NOTE Dummy loads covered by this specification sheet are substitutable for the following manufacturers' part numbers. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

| Dash number | Manufacturer's code | Manufacturer's part number | FSN |
|---|---|---|---|
| 01 | 05869 | 723873-4 | |
| 01 | 95077 | 100-0030 | |
| 02 | 05869 | 723873-5 | |
| 02 | 24602 | 02-250-TP | 5985-01-032-0107 |
| 02 | 95077 | 100-0031 | |
| 03 | 05869 | 723873-3 | |
| 03 | 24602 | 02-125-TP | |
| 03 | 95077 | 100-0029 | |
| 04 | 14590 | 3449-0711 | |
| 04 | 95077 | 100-0044 | |

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities
Army - ER, MI
Navy - OS, SH
Air Force - 11, 17, 85
DLA - ES

User activities
Army - AV
Navy - AS
Air Force - 19

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5985-0926-9)



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:55Z
Check the source to verify that this is the current version before use.

# RDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

IONS The purpose of this form is to solicit beneficial comments which will help achieve procure- rabl lucts at reasonable cost and minimum delay or will otherwise enhance use of the document ictors vernment activities, or manufacturers/vendors who are prospective suppliers of the product to submit comments to the government Fold on lines on reverse side staple in corner and send to ctivity Comments submitted on this form do not constitute or imply authorization to waive any he referenced document(s) or to amend contractual requirements Attach any pertinent data which se in improving this document. If there are additional papers, attach to form and place both in an ddressed to preparing activity

DENTIFIER AND TITLE

MIL-D-39030/21

GANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT

PARAGRAPH NUMBER AND WORDING

IMMENDATIONS FOR CORRECTING THE DEFICIENCIES

ITS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

DOCUMENT RESTRICTIVE?

YES ☐ NO *(If "Yes", in what way?)*

CS

D BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

ORM 1426
AN 72

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:55Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

**BUSINESS REPLY MAIL**

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department Of The Navy
Washington, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:55Z
Check the source to verify that this is the current version before use.