
MILITARY SPECIFICATION SHEET

DUMMY LOAD, ELECTRICAL, TYPE XIV (TAB CONTACT), STRIPLINE, HIGH POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dummy load described herein shall consist of this document and the latest issue of Specification MIL-D-39030.

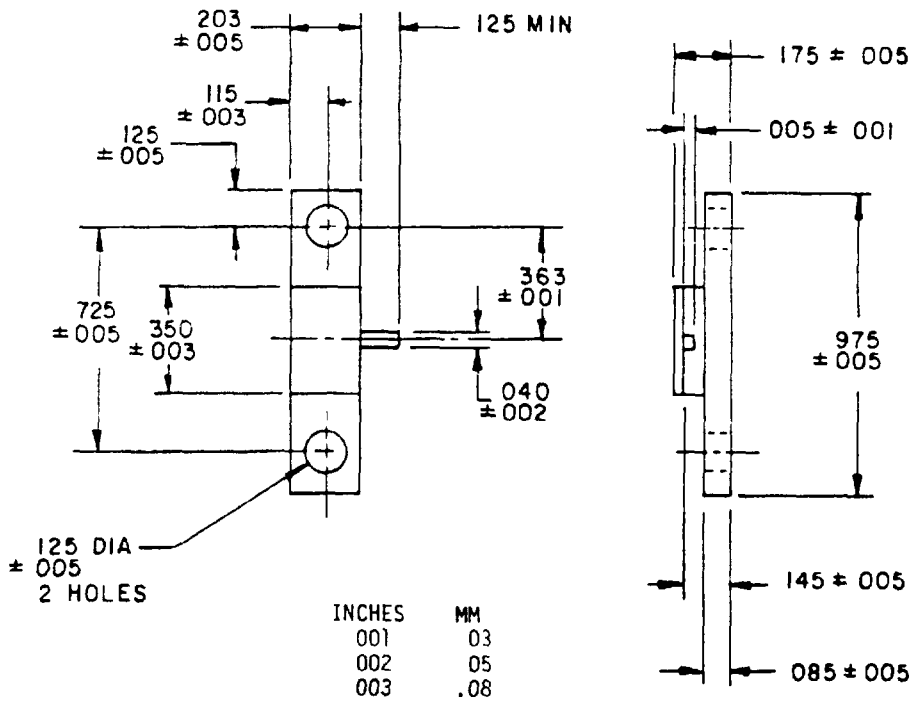

INCHES	MM
001	03
002	05
003	.08
.005	13
.040	1.02
085	2 16
115	2 92
.125	3.18
145	3.68
175	4 44
.203	5 16
350	8.89
363	9.22
.725	18.42
975	24.76

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm

FIGURE 1 Dimensions and configuration

Source: http://assist.dla.mil -- Downloaded: 2026-10-21T18:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1.

Electrical characteristics

Operating frequency DC to 4.0 GHz

Voltage standing wave ratio (VSWR) 1.25:1, maximum

Power

Average 40 watts.

Peak 300 watts maximum at 10 microsecond pulse with a 1 percent duty cycle. Average power during peak power application shall not exceed maximum average power

NOTE: At a maximum body temperature of +200°C

Nominal characteristic impedance 50 ohms.

Materials

Body Corrosion-resistant steel per QQ-S-763

Finish Gold plated per MIL-G-45204, type II, class 2

Tab contact Beryllium copper per QQ-C-530

Finish Gold plated per MIL-G-45204, type II, class 2.

Weight Not applicable

Ambient temperature range

Operating 0°C to +65°C

Nonoperating (storage) 0°C to +200°C

Solderability Method 208 of MIL-STD-202, the following details and exception shall apply

a. Number of terminations of each part to be tested - One contact
b. Special preparation of terminations - No wiping, cleaning, scraping, or abrasive cleaning of the contact shall be performed
c. Depth of immersion - The entire surface of the contact shall be covered
d. Method of mounting - The dummy load shall be mounted onto a heat sink.
e. Examination of terminations - There shall be no evidence of pinholes and blistering

NOTE: This test shall be performed after the visual and mechanical inspection in qualification

Part number M39030/22-01.

NOTE: The dummy load covered by this specification sheet is substitutable for the following manufacturers' part numbers. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number

Dash number	Manufacturer's code	Manufacturer's part number	FSN
01	10001	3271507	
	50155	CR1012	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:55Z
Check the source to verify that this is the current version before use.

Custodians.
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - ER, MI
Navy - OS, SH
Air Force - 11, 17, 85
DLA - ES

User activities:
Army - AV
Navy - AS
Air Force - 19

Preparing activity.
Navy - EC

Agent:
DLA - ES

(Project 5985-0926-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side staple in corner and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE
MIL-D 39030/22

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?
☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:55Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PE· ·LTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department Of The Navy
Washington, D.C. 20360

LD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:55Z
Check the source to verify that this is the current version before use.