INCH-POUND

MIL-DTL-39030/22A
19 June 2013
SUPERSEDING
MIL-D-39030/22
22 December 1980


DETAIL SPECIFICATION SHEET

DUMMY LOAD, ELECTRICAL, TYPE XIV (TAB CONTACT), STRIPLINE, HIGH POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-39030.

Inches	mm
.001	0.03
.002	0.05
.003	0.08
.005	0.13
.040	1.02
.085	2.16
.115	2.92
.125	3.18
.145	3.68
.175	4.44
.203	5.16
.350	8.89
.363	9.22
.725	18.42
.975	24.76

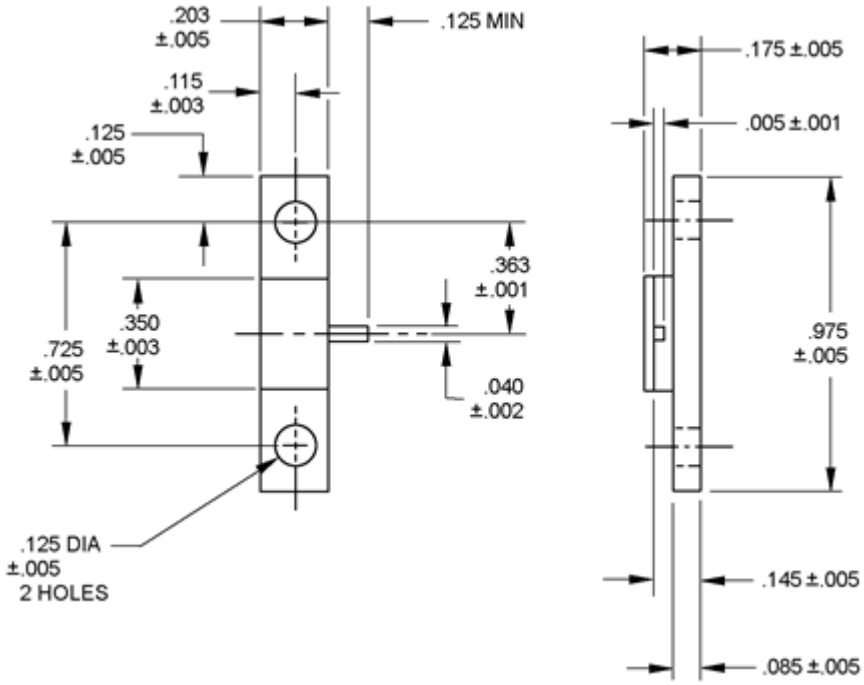

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1.

Electrical characteristics:

Operating frequency: DC to 4.0 GHz.

Voltage standing wave ratio (VSWR): 1.25:1, maximum.

Power:

Average: 40 watts.

Peak: 300 watts maximum at 10 microsecond pulse with a .1 percent duty cycle. Average power during peak power application shall not exceed maximum average power.

Note: At a maximum body temperature of +200°C.

Nominal characteristic impedance: 50 ohms.

Materials:

Equivalent industry standards may be used with the approval of the qualifying activity.

Body: Corrosion-resistant steel in accordance with SAE-AMS-QQ-S-763.

Finish: Gold plated in accordance with ASTM B488, type 3, grade C, class 1.27 over copper flash.

Tab contact: Beryllium copper in accordance with ASTM B196/B196M, ASTM B197/B197M and ASTM B194.

Finish: The male pin shall be a minimum gold thickness of 50 micro inches (1.27μm) in accordance with ASTM B488, type 3, grade C, class 1.27, over 50 micro inches (1.27 μm) minimum of nickel in accordance with SAE-AMS-QQ-N-290, class 1, measured anywhere along the mating surface, for all series. The socket contact shall be a minimum of 50 micro inches (1.27μm) of gold in accordance with ASTM B488, type 3, grade C, class 1.27, over 50 micro inches (1.27 μm) minimum of nickel in accordance with SAE-AMS-QQ-N-290, class 1, including the ID, measured at a depth of .040 inch minimum. The plating on non-significant surfaces in the ID shall be of sufficient thickness to ensure plating continuity and uniform utility and protection. This plating may consist of an underplate only. A silver underplate shall not be permitted.

Weight: Not applicable.

Ambient temperature range:

Operating: 0°C to +65°C.

Nonoperating (storage): 0°C to +200°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:55Z
Check the source to verify that this is the current version before use.

Solderability: Method 208 of MIL-STD-202, the following details and exception shall apply:

a. Number of terminations of each part to be tested: One contact.

b. Special preparation of terminations: No wiping, cleaning, scraping, or abrasive cleaning of the contact shall be performed.

c. Depth of immersion: The entire surface of the contact shall be covered.

d. Method of mounting: The dummy load shall be mounted onto a heat sink.

e. Examination of terminations: There shall be no evidence of pinholes and blistering.

Note: This test shall be preformed after the visual and mechanical inspection is qualification.

Part or Identifying Number (PIN): M39030/22-01.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents: In addition to MIL-DTL-39030, this document references the following:

ASTM B488
MIL-STD-202
SAE-AMS-QQ-N-290
SAE-AMS-QQ-S-763
ASTM B196/B196M
ASTM B197/B197M
ASTM B194

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5985-2013-020)

Review activities:
Army - AV, MI
Navy - AS, OS, SH
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:55Z
Check the source to verify that this is the current version before use.