MILITARY SPECIFICATION

BUCKLE, GENERAL OFFICERS' BELT, GOLD PLATED

This amendment forms a part of Military Specification MIL-B-40006C (IH), dated 31 March 1977, and is approved for use by all Departments and Agencies of the Department of Defense.

Page 2

Para. 3.3.2 Delete in its entirety and substitute. "3.3.2 Screw post and thumb nut. The screw post and thumb nut shall be fabricated from any type brass and shall conform to the details and dimensions of Drawing B-6-3.

Page 3

Paragraph 3.5 - 4th 5th 6th and 7th sentences - Delete in their entirety and substitute the following sentences: "Two screw posts specified in 3.3.6 shall be soldered, or fused, to the back of the coat of arms. The screw posts shall be soldered on the vertical centerline equidistant from the top and the bottom and 9/16 inch, plus or minus 1/64 inch on centers. After finishing, the coat of arms shall be mounted on the tongue buckle by means of two thumb nuts specified in 3.3.6. The embossed wreath shall be dapped to fit the contour of the slotted body and shall have five screw posts soldered or fused to the back of the wreath. One post shall be located on the intersection of the vertical centerline and center of ring of the slotted body. The remaining four posts shall be located at the intersections of the center line of the ring and two horizontal lines 13/32 (plus or minus) 1/64 inch above and below the horizontal center line. The areas to receive the thumb nut farthest away from the belt loop shall be counter sunk."

Paragraph 3.5.3 - Delete in its entirety.

Page 4

Paragraph 3.6.1 - Delete in its entirety and substitute. "3.6.1 Coat of Arms. The coat of arms for the buckle shall have a gold plated, satin finish with polished highlights."

Paragraph 3.6.2 - Delete in its entirety and substitute. "3.6.2 Buckle Tongue. The tongue of the buckle shall have a mirror-like polish on the obverse face and the back shall have a bright, or satin, gold plated finish."

FSC 8315

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

Paragraph 3.6.3 - Delete in its entirety and substitute. "3.6.3 Wreath. The wreath for the buckle shall have a gold plated, satin finish with polished highlights."

Paragraph 3.6.4 - Delete in its entirety and substitute. "3.6.4 Slotted body. The slotted body of the buckle shall have a mirror-like gold plated polished finish."

Page 6

Paragraph 4.3.1.1.1 - Delete the first requirement and substitute the following:

Components	Characteristics	Rqm't para
"Screw post and thumb nut	Material Identification	3.3.2

Paragraph 4.3.1.2 - Delete second requirement and substitute the following:

Requirement, operation or assembly	Rqm't para
"Soldering of screw post to the back of the coat of arms and wreath	3.5

Page 8

Paragraph 4.3.2.1.1 - Under assembly add the following defects after the last listed defect.

Examine	Defect	Classification Major	*	Minor
	Coat of arms or wreath not securely mounted on the tongue buckle, i.e., one or more thumb nuts missing	x		
	Thumb nuts not securely tightened			x

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

Paragraph 4.3.2.1.1 - Under workmanship, delete the following defects:

Examine	Defect	Classification Major	*	Minor
	Coat of arms or wreath is not securely riveted to buckle, i.e., rivet is missing, loose poorly or insufficient peened.	x	-	-
	Any rivet not tubular, ragged edges, split or not concentric.	-	-	x

Page 9

Table III - Under "#determ per sample units" delete "Coat of arms/wreath only."

Page 13

Delete "Figure 1" and substitute new "Figure 1."

Custodians:
Army - IH

Review activities:
Army - GL
Other - CT


Preparing activity:
Army - IH

(Project No. 8315 - A313)

FSC 8315

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

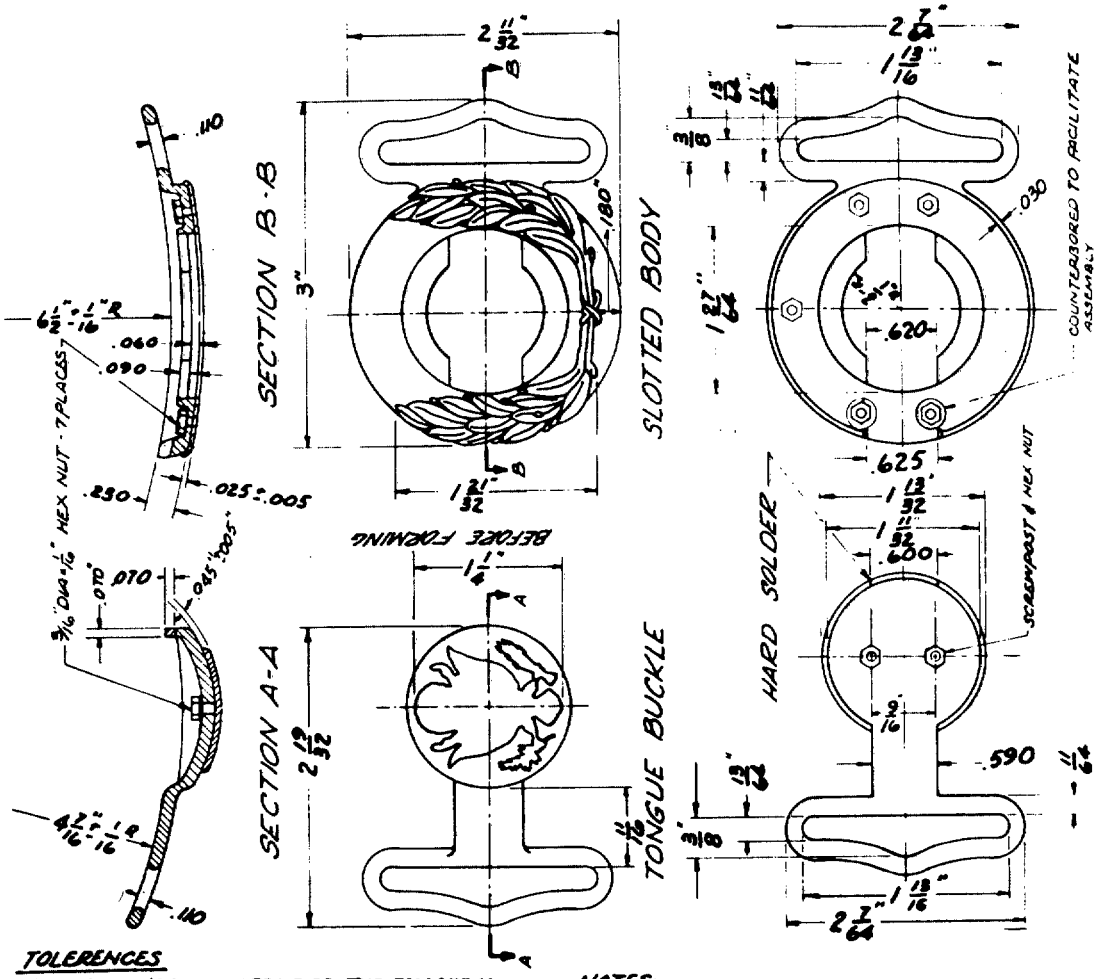

TOLERENCES

UNLESS OTHERWISE SPECIFIED THE FOLLOWING TOLERENCES SHALL APPLY:
MATERIAL THICKNESS ±.010
ALL OTHER DECIMAL DIMENSIONS ±.015
FRACTIONAL DIMENSIONS ARE REFERENCE DIMENSIONS CONTROLLED BY GOVERNMENT FURNISHED HUBS AND DIES AND ARE INCLUDED FOR REFERENCE PURPOSES ONLY.

NOTES:

FOR ILLUSTRATION OF EAGLE SEE TIOH DWG № B-6-6

TO BE MANUFACTURED IN ACCORDANCE WITH LATEST REVISION OF SPECIFICATION MIL-B-40006

This is a miniature copy of THE INSTITUTE OF HERALDRY Drawing No. B-6-3, dated 13 DEC '79. This copy is for information only. The dwg referenced in para 2.1 governs.

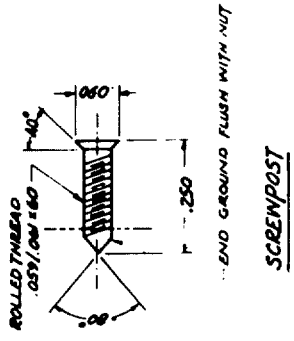


FIGURE 1

BUCKLE, GENERAL OFFICER BELT, GOLD PLATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.