NOT MEASUREMENT SENSITIVE

MIL-DTL-40006E
30 July 2026
SUPERSEDING
MIL-B-40006D
29 September 1992

MILITARY SPECIFICATION

BUCKLE, GENERAL OFFICERS BELT, GOLD PLATED

This specification is approved for use by all,
Departments and agencies of the Department of Defense

1. SCOPE

1.1 Scope. This specification covers one type of belt buckle used by general officer's (see 6.1).

2. APPLICABLE PUBLICATIONS

2.1 General. The documents listed in this section are specified in section 3, and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, and 4 of this specification, whether they are listed.

2.2 Government publications.

2.2.1 Specification, standard and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents cited in the solicitation or contract.

SPECIDFICATION FEDERAL
NN-P-71 – Pallet Material Handling Wood Stringer Construction 2 -Way and 4-Way (Partials)
PPP-B-676 – Boxes, Setup
A-A-1249 – Paper, Wrapping, Tissue

Comments, suggestions, or questions on this document should be addressed to The Institute of Heraldry, ATTN: Technical and Production Division, 9325 Gunston Road, Room S-108, Fort Belvoir, VA 22060-5579 or email to usarmy.belvoir.hqda.mil.tioh-webmaster@mail.mil. You may verify the currency of this specification using the ASSIST Online database at https://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS MILITARY
MIL-DTL-1462 – Belt, General Officer

STANDARD MILITARY
MIL-STD-1916 - DOD Prepared Method for Acceptance of Product
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 – Palletized Unit Loads

(Copies of these documents are available online at https://quicksearch.dla.mil).

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

STANDARD CHIP SETS
THE INSTITUTE OF HERALDRY
Standard Hard Enamel Color Chip Set
DoD Standard Metal Finish Chip Set

DRAWINGS
THE INSTITUTE OF HERALDRY
B-6-3 - Buckle, Belt, General Officers, Gold Plated

(Copies of standards, drawings and Chip sets are available from The Institute of Heraldry, ATTN: Technical and Production Division, 9325 Gunston Road, Room S-108, Fort Belvoir, VA 22060-5579 or usarmy.belvoir.hqda.mi.tioh-webmaster@Army.mil.)

(Figures 1, 2, 3, 4, and5 are miniature reproductions of the referenced drawings and are attached for information only.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents are those cited in the solicitation or contract.

ASTM INTERNATIONAL

ASTM-B568 - Standard Test Method for Measurement of Coating Thickness by X-Ray Spectrometry
ASTM-D2240 - Standard Test Method for Rubber Property – Durometer Hardness
ASTM-D1974/D1974M – Fiberboard Boxes, Methods of Closing Sealing and Reinforcing Standard Practice For
ASTM-B86 - Zinc and Zinc -Aluminum (ZA) Alloy Foundry and Die Casting
ASTM- B487 - Metal and Oxide Coating Thickness by Microscopical of a cross Section Measurement of
ASTM- D3951 – Packaging Commercial

(Copies for these documents are available online at https://www.astm.org)

ASTM INTERNATIONAL
ANSI/ASQ Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

(Copies for this document are available online at https://acq.org)

2.4 Order of precedence. Unless otherwise noted herein or in the contract. In the event of a conflict between the text of this document and the references cited herein (except for related specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard Sample. Unless otherwise specified (see 6.2), a standard sample shall be furnished by the contracting officer to be used for guidance. Information and as a standard for design and workmanship. Variation from this specification may appear in the guide sample in which event the specification shall govern.

3.2 First article. When specified (see 6.2) a sample shall be subjected to first article inspection (see 6.5) in accordance with 4.3.

3.3 Materials. Materials shall be as specified herein.

3.3.1 Copper base alloy. The copper base alloy shall be roll polished, free from pits, scale (including red oxide), dents, nicks, cracks, scratches, segregation, and foreign inclusions that cannot be removed in later processing. When tested as specified in 4.5.1, the chemical composition of the copper content of the copper base alloy shall be as specified in Table I.

TABLE I. Unified Numbering System and Copper content of copper base alloys.

UNS ALLOY NUMBER	ALLOY NAME	COPPER
C210	Gilding Metal	94.0%-96.0%
C220	Bronze	89.0%-91.0%
C230	Red Brass	84.0%-86.0%
C240	Low Brass	78.5%-81.5%
C268	Yellow Brass	64.0%-68.5%
C280	Free Cutting Brass	59.0%-63.0%
C745	Nickel Brass	63.0%-66.5%
C752	Nickel Silver (65-18)	63.0%-66.5% 2/
C770	Nickel Silver (55-18)	53.5%-56.5% 1/

1/ Copper content for the nickel silver pin only may be 53.5% to 56.5% (C770).

2/ When nickel silver is used as a base material, the nickel content shall be not less than 18% (C752).

3.3.2 Screw post and thumb nut. The screw post and thumb nut shall be fabricated from any type of brass and shall conform to the details and dimension of drawing B-6-3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

3.3.3 Soft solder. Soft solder shall be a lead-tin alloy having a melting point of not less than 375 °F (190.55 °C).

3.3.4 Gold for plating. Gold for plating shall be 24 karats.

3.3.5 Lacquer. Lacquer shall be a semi-gloss, clear, synthetic lacquer. The use of a pigmented lacquer shall not be permitted.

3.4 Design. The embossed design of the buckle shall be an exact replica of the design on the Government Furnished hub (see 3.7), from which the contractors working dies shall be extracted. The contractor's working die shall be tooled and polished to remove any dents, nicks, scratches, or other imperfections.

3.5 Construction. The buckle shall be constructed in accordance with the drawing B-6-3 (see Figure 1). The buckle shall be made from red brass specified in 3.3.1, The coat of the arms shall be pierced as shown on Figure 2 and shall be dapped to fit the contour of the buckle tongue. Two screw post specified in 3.3.2 shall be soldered or fused to the back of the coat of arms on the vertical center line, equidistant from the top and the bottom and 9/16 inch ± 1/64 inch apart. After finishing the coat of arms shall be mounted on the tongue buckle by means of two thumb nuts specified in 3.3.2. The embossed wreath shall be dapped to fit the contour of the allotted body and shall have five screw posts soldered or fused to the back of the wreath. One post shall be located on the intersection of the vertical center line and center of the ring of the slotted body. The remaining four posts shall be located at the intersection of the center line of the ring and two horizontal lines 13/32 inch ± 1/64 inch above and below the horizontal center line. The areas to receive the thumb nut farthest away from the belt loop shall be counter sunk. The coat of arms shall be centered on the buckle tongue and the embossed wreath shall be centrally aligned on the slotted body. When the tongue is engaged into slotted body, the tongue buckle shall lie flush within the slotted body and be located I this position. The center lines of the coat of the arms and this wreath shall be align.

3.5.1 Stamping, trimming, and piercing. The embossed areas shall have a well-defined die struck edge. When applicable, embossed areas shall be trimmed and, when applicable, pierced to the die struck edge. All edges shall be clean, smooth, and free from burrs, drag, step, and rough edges. The stamping, piercing, and trimming operations shall not damage or distort the design or alter the shape of the item.

3.5.2 Soldering. All soldering shall be accomplished using solder specified in 3.3.3. Joint shall be clean, smooth, strong, and free from burned or reduced areas. There shall be no excess solder and all excess flux shall be removed, when tested as specified in 4.6.4, the soldered parts shall be separate.

3.6. Finish.

3.6.1 Coat of arms. The coat of arms shall be a gold plated with a matte finish and polished highlights.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

3.6.2 Buckle tongue. The tongue of the buckle shall be gold plated. The obverse shall be mirror – like polished finish on the obverse side and the reverse shall be matte finish.

3.6.3 Wreath. The wreath shall be gold plated with matte finish and polished highlights.

3.6.4 Slotted body. The slotted body of the buckle shall be gold plated with mirror – like polished finish.

3.6.5 Gold plating. Gold plating shall be accomplished using gold specified in 3.3.4. Prior to plating, all surfaces shall be cleaned of all matter which might affect the gold plating. Unless otherwise specified, the use of white metal as an undercoating shall not be permitted. When tested as specified in 4.6.1 no visible chemical reactions, such as evolution of gases, shall appear. When tested as specified in 4.6.1 the average quantity of gold on buckle within a lot shall not be less than the amount specified. In addition, any buckle tested shall contain not less than 90 percent.

3.6.6 Lacquering. The obverse and reverse of finish buckles shall be lacquered with lacquer specified in 3.3.5, The dry lacquer film shall be continuous, level, adherent and free from lint, dust and other foreign matters. When tested as specified in 4.6.2, there shall be no change in appearance of the lacquered surface except the following will be permitted:

(a) A slight overall yellowing of the highlights.
(b) Not more than 2 dark spots, no larger than 1/16 inch, widely distributed on the buckle and not more than three such additional spots shall be permitted on the edge of the buckle.

3.7 Government loaned property. Hubs for the wreath and the coat of arms shall be furnished by the Government and shall be used to make the contractor's working dies necessary for one contract or order (see 3.4). Unless otherwise specified (see) 6.2), forming dies for the tongue and slotted body shall be furnished by the Government.

3.8 Marking. The contractor shall stamp his trademark or other identifying mark legibly and inconspicuously on the back of the buckle tongue. There shall be no sign of penetration or unevenness on the surface opposite the marked area. The marking shall not distort any part of the buckle.

3.9 Workmanship. Buckle shall be clean, well made, and shall meet the acceptable quality level established by the specification.

4. VERIFICATIONS

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:
a. First article inspection (see 4.3).
b. Conformance inspection (see 4.4).

4.2 Inspection conditions. Unless otherwise specified, all inspection shall be performed in accordance with the test conditions specified in 4.3 and 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. Inspection and testing of the first article (see 3.2) shall be made of a completely finished item for all provisions of this specification applicable to the end product examination and tests.

4.4 Conformance inspection. Inspection of components and materials shall be in accordance with the subsidiary specifications and drawings. Sampling for inspection shall be performed in accordance with ASQ/ANSI Z1.4.

4.4.1 Testing of components. Inspection shall be performed on components and materials listed in Table II for the test characteristics shown therein. Material listed in Table II may be accepted on a contractor's certificate of compliance for requirements specified in applicable paragraphs of this specification. The government reserves the right to test samples of the gold and silver (without additional charge) to verify the contractor's certification.

TABLE II. Testing of components.

Component and lot expressed in terms of	Charac-teristic	Rqm't Para	Test method	Rqm't Applicable To lot Average	#determ Per Sample unit	Results Reported as	Sample Unit
Cooper Base alloy (1 lb)	Chemical Composition	3.3.1	4.6.5	X	2 for each element	Nearest 0.1% for each element	4 oz of material

4.4.2 Certification of compliance. Material listed below may be accepted on the basis of the contractor's certificate of compliance for requirements specified in applicable paragraphs of this specification.

COMPONENTS	CHARACTERISTIC	RQM'T PARA
Screw post & thumb nut	Material identification	3.3.2
Hard solder	Material identification and melting point	3.3.3
Gold for plating	Material identification	3.3.4
Lacquer	Material identification	3.3.5

4.4.3 In-process inspection. In-process inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance. In-process inspection shall be conducted to see that accomplishment of the following is in accordance with the specification requirements:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

REQUIREMENT, OPERATION OR ASSEMBLY	REQUIREMENT PARAGRAPH
Gold plating of coat of arms	3.6.1
Soldering of screw post to the back of the coat of arms and wreath	3.5
Gold plating of wreath	3.6.3

4.5 End item inspection.

4.5.1 Visual examination of end item. Visual examination of decorations and medals for defect in finish, design, material, construction, workmanship, and marking shall be made using Table III. Examination shall be made at a distance of approximately 16 to 22 inches with illumination equal to average daylight and arranged so as to avoid as much reflected light possible. Defects designated by an asterisk (*) shall be classified as major when seriously affecting appearance or serviceability and minor when affecting appearance or serviceability but not seriously. The product unit for the examinations shall be one completely fabricated decoration or medal. Any dimension which is not within specified tolerance shall be classified as a defect.

TABLE III. DEFECTS.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	(*)	MINOR
Color & Finish	Poor match to the TIOH DoD Standard Metal Finish Chip Set ……	X		
	The oxidized finish, when required, has not been sufficiently relieved, or has been excessively relieved ……		*	
	Not highlighted to the same extent as the TIOH Metal Finish Chips Set ……		*	
	Background or recessed area not finished as specified ……	X		
	Jump rings and suspension links as applicable are not finished as specified …….	X		
	Surface contains pits, scale, nick, scratch, crack, machine mark, pin hole, segregation, rupture, foreign matter, or another blemish …….		*	
	Buff, drag, blushed, or cloudy finish. …….		*	
	Foreign matter embedded ……..			X
	Discoloration, spot, stain, or speck affecting appearance ……..		*	
	Not clean ……..			X
Plating	Not plated (when required) ……	X		
	Not type specified ……..	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

	Plating not smooth, continuous, or adherent ….	X		
	Foreign matter imbedded …….		*	
	Not nickel under plated when required ……	X		
	Nickel under plated when not required ……	X		
Hard enamel	Not enameled (when required) ……..	X		
and epoxy	Incorrect color or shade ……..	X		
	Enamel not contained within the prescribed outline of the design ……	X		
	Cracked, chipped, or crazed ……..		*	
	Bubbles, blisters, holes lumps, or foreign inclusion ……		*	
	Not stoned smoothly (when required), i.e., is coarse, uneven , or has drag marks ..…….		*	
	Not level with the dikes, i.e., contains high or low spots ……..		*	
	Not convex within dikes (when required) ……		*	
	Laps, overruns, or skips ……		*	
	Burned areas, specking, discoloration, lack of gloss ……..	X	*	
Soft Enamel	Not Enameled or area of no enamel ……...			
	Area of thin epoxy……			X
	Not adherent, i.e., blistered, flaking, or peeling .		*	
	Foreign matter imbedded ……..		*	
	Discolored ……		*	
	Coating not continuous and level, i.e., runs, drips, or drops ……..		*	
Color & finish	Poor match to the standard ……..	X		
of plastic	Pit, nick, scratch, pin hole, crack, or other			
insert (as	blemish ……..		*	
applicable)				
	Not uniform in color ……		*	
	Surface discolored or not clean, e.g., spot, stain, speck ……..		*	
Design	Construction or design details do not conform to Government hub ……..	X		
	Not dapped (when required) ……..	X		
	Any significant detail not clear, altered, reduced, distorted, or missing ……..……	X		
	Any detail struck over resulting in a double impression ……	X		
	Any warp, twist or distortion, irregular surface contour or outline ……..		*	
	Any area not pierced (when required) ……	X		
	Hole in lug is missing or not completely drilled through when applicable ……	X		
	Lugs not of specified design and type ……..	X		
	Design not as specified ……..	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

	Any operation not in accordance with the specified requirements, i.e., lug, loop, design is not integral part of the pendant when required; or hole is drilled through the lug in the Purple Heart or the Soldiers' Medal pendant ……..	X		
Workmanship	Metal marks on exposed surface (such as nick, dent, dig, gouge, or scratch) ……..		*	
	Not trimmed to die-struck edge ……		*	
	Design or shape altered by piercing ……		*	
'	Any component (including jump rings) missing, twisted, bent out of shape, malformed, or deformed, e.g., swivel bar does not revolve as specified ……..		*	
	Not connected or joined as specified or operation is poorly accomplished, e.g., ends of jump rings not closed (when required) or not in alignment or flange of frame tab not securely bent around ribbon clip and bar ……		*	
	Piercing not clean and smooth, e.g., any burrs or cutter, drill, or file marks …..……..		*	
	Any solder spatter on front exceeding 1/32 inch, exposed, or plated over ……...	X		
	Flux or excess solder not removed ……..		*	
	Any area burned or reduced in soldering or acid cleaning……..		*	
	Incorrect type of solder used ……	X		
	Surface or edge not clean, not smooth or not free from burrs, roughness, drag, step or tool marks ……		*	
	Superimposed design, when applicable, not centered or not positioned on medal as required ……		*	
	Superimposed design is not securely riveted to medal (when applicable), i.e., rivet is loose, poorly or insufficiently peened or swaged ….	X	–	
Assembly	Centerline of coat of arms and wreath out of alignment……	X		
	Tongue buckle does not lie flush within the slotted body or tongue buckle not locked in slotted body……	X		
	Coat of arms or wreath not securely mounted on the tongue buckle, i.e., one or more thumbs nuts missing……	X		
	Thumb nuts not securely tightened…….	-		X
Marking	Missing illegible, incorrect or incomplete……	-		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

4.4.4.2 End item testing. Testing of the completely fabricated decorations and medals shall be performed in accordance with Table IV for the characteristics shown therein. The sample unit shall be one gold plated, one lacquered, one enameled decoration or medal as applicable. The sample unit for the test for hard soldered or fused joints shall be one finished item. All items shall be tested, and one defect shall be scored regardless of how many prongs on that item failed. For other than the test for fused prongs, the requirements shall be applicable to the individual unit. Individual tests are detailed in 4.5.

TABLE IV. Testing of end item.

CHARACTERISTIC	REQUIREMENT PARAGRAPH	TEST METHOD	#DETERM PER SAMPLE UNIT	RESULTS REPORT AS
Acid test for gold plating	3.3.4	4.6.1	1	Pass or Fail
Test for lacquer: liver sulfur	3.3.5	4.5.8	1	Pass or Fail
Tackiness test	3.5.2	4.6.3	1	Pass or Fail
Test for soldered joints	3.5.2	4.5.3	3	Pass or Fail

4.5 End item tests.

4.5.1 Copper content test for copper base alloy. Copper content shall be determined by standard commercial testing. Results shall be evaluated to determine compliance with the requirements specified in 3.4.1.

4.5.2 Test for soldered joints.

4.5.2.1 Hard solder. Hard soldered items shall be placed in an oven maintained at 1075 ± 5 °F for 15 minutes. While at this temperature the item shall be lifted by the attaching device and shall be inspected to determine compliance with the requirements specified in 3.6.2.

4.5.2.2 Soft solder. Soft soldered items shall be placed in an oven maintained at 365° ± 5 °F for 15 minutes. While at this temperature the item shall be lifted by the superimposed design and shall be inspected to determine compliance with the requirements specified in 3.6.3.

4.5.3 Test for electronically fused joints. Item to be tested shall be anchored on a horizontal surface. Each prong shall be grasped at least 1/3 its length above the fused joint and bent through an angle of 90 degrees (45 degrees to each side of the vertical) until the prong breaks. The fused joint shall then be examined to determine compliance with 3.6.2. A bending tool in the form of a 45-degree template may be used for this test provided the prong is gripped at least 1/3 its length above the fused joint.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

4.5.4 Test for shore hardness of epoxy resin. Shore hardness shall be determined in accordance with ASTM D-2240. Results shall be evaluated to determine compliance with the requirements of 3.8.1.2.

4.5.5 Acetone test for soft enamel. The enameled surface shall be wiped five times with a piece of cotton saturated with acetone. The cotton and enamel shall then be examined to determine compliance with 3.8.1.4.

4.5.6 Test for pins, joints, and safety catches. Safety catches and pins shall be opened and closed ten times, after which the pins, joints, and safety catches shall be inspected to determine compliance with the requirements specified in 3.7.6.1.

4.5.7 Test for clutch type attaching device. The clutches shall be removed and replaced ten times from the prong using the clutch release mechanism. An attempt shall then be made to remove the clutch by hand without first depressing the release mechanism or pulling out on the back. An inspection shall be made at this time of the clutch to determine compliance with the requirements specified in 3.7.6.2.

4.5.8 Test for lacquer. At room temperature (60 to 80 °F), press a piece of tissue paper against the lacquered surface for 15 seconds, using any pressure capable of being exerted between thumb and two fingers, after which the pressure shall be released and the item inspected to determine compliance with 3.8.4.

4.6.1 Acid test for gold plating. The teat acid shall be applied as follows: Place a drop of acid of not less than 1/16 inch (0.16 cm) in diameter on three different spots on the front face of the buckle allowing the drops to remain for not less than two (2) minutes during which time the surface of the buckle shall be inspected to determine compliance with the requirements of 3.6.5. A minimum of two spots must withstand the acid test. The test acid shall be applied at room temperature (60 to 80 degrees Fahrenheit) and shall consist of a solution containing 50 percent by volume of chemically pure nitric acid (specific gravity 1.42) and an equal volume of distilled water. If the test buckle has been lacquered, the lacquer shall be removed prior to testing.

4.6.2 Liver of sulfur test. Buckles shall be immersed in a 2 percent by weight CHEMICALLY PURE liver of sulfur (potassium sulfide) water solution at a temperature of 100 degrees Fahrenheit ~ 10 degrees Fahrenheit for a period of 3 minutes. The buckles shall then be removed and rinsed in warm, then cold, then hot water, after which it shall be wiped gently with an absorbent cellulose material or whirled to remove residual moisture, allowed to dry at room temperature (60 to 80 degrees Fahrenheit) for one (1) hour and then be examined to determined compliance with 3.6.6.

4.6.3 Tackiness test. At room temperature (60.to 80 degrees Fahrenheit), press a Piece of tissue Paper a9ainst the lacquered surface for 15 seconds, using any pressure capable to being exerted between thumb and two fingers, after which the pressure shall be released and the buckle inspected to determine compliance with 3.6.6.

4.6.4 Tests for hard soldered joints. Hard soldered joints to be tested shall be placed in an oven maintained at 1075 degrees Fahrenheit ± 5 degrees Fahrenheit for not less than 15 minutes. While at this temperature, the items shall be lifted by the coat of arms, wreath or soldered edge and the joints examined for compliance with 3.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

4.6.5 Chemical composition test. Chemical composition shall be determined in accordance with Method Number 111.1 of FED-STD-151. Results shall be evaluated to determine compliance with the requirements specified on 3.3.1.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD or in- house contractor personnel these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. Decorations and medals covered by this specification are intended to be worn by Government or military personnel to provide tangible evidence of public recognition of personal acts of heroism performed or valuable service rendered.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. The title, number, and date of the applicable specification sheet (See 1.2 and 2.2.1).
c. When first article is required (see 3.2).
d. Ribbon required (See 3.4.8).
e. Type and style service ribbon required (See 3.4.13).
f. Selection of applicable presentation packaging of decorations and medals (See 3.9.1 and 3.9.2).
g. When special marking is required (see 3.11.1).
h. Packaging requirements (See 5.1)

6.3 Government-loaned property. The contracting officer should arrange to loan the property listed in 3.5.

6.4 Subject term (key word) listing.

Acetone
Awards
Enamel, hard
Enamel, soft
Epoxy
Lacquering
Lead
Medal of Honor

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

Neck ribbon
Nitric Acid
Plating
Ribbon drapes
Service ribbons
Silver
Soldering

6.7 CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

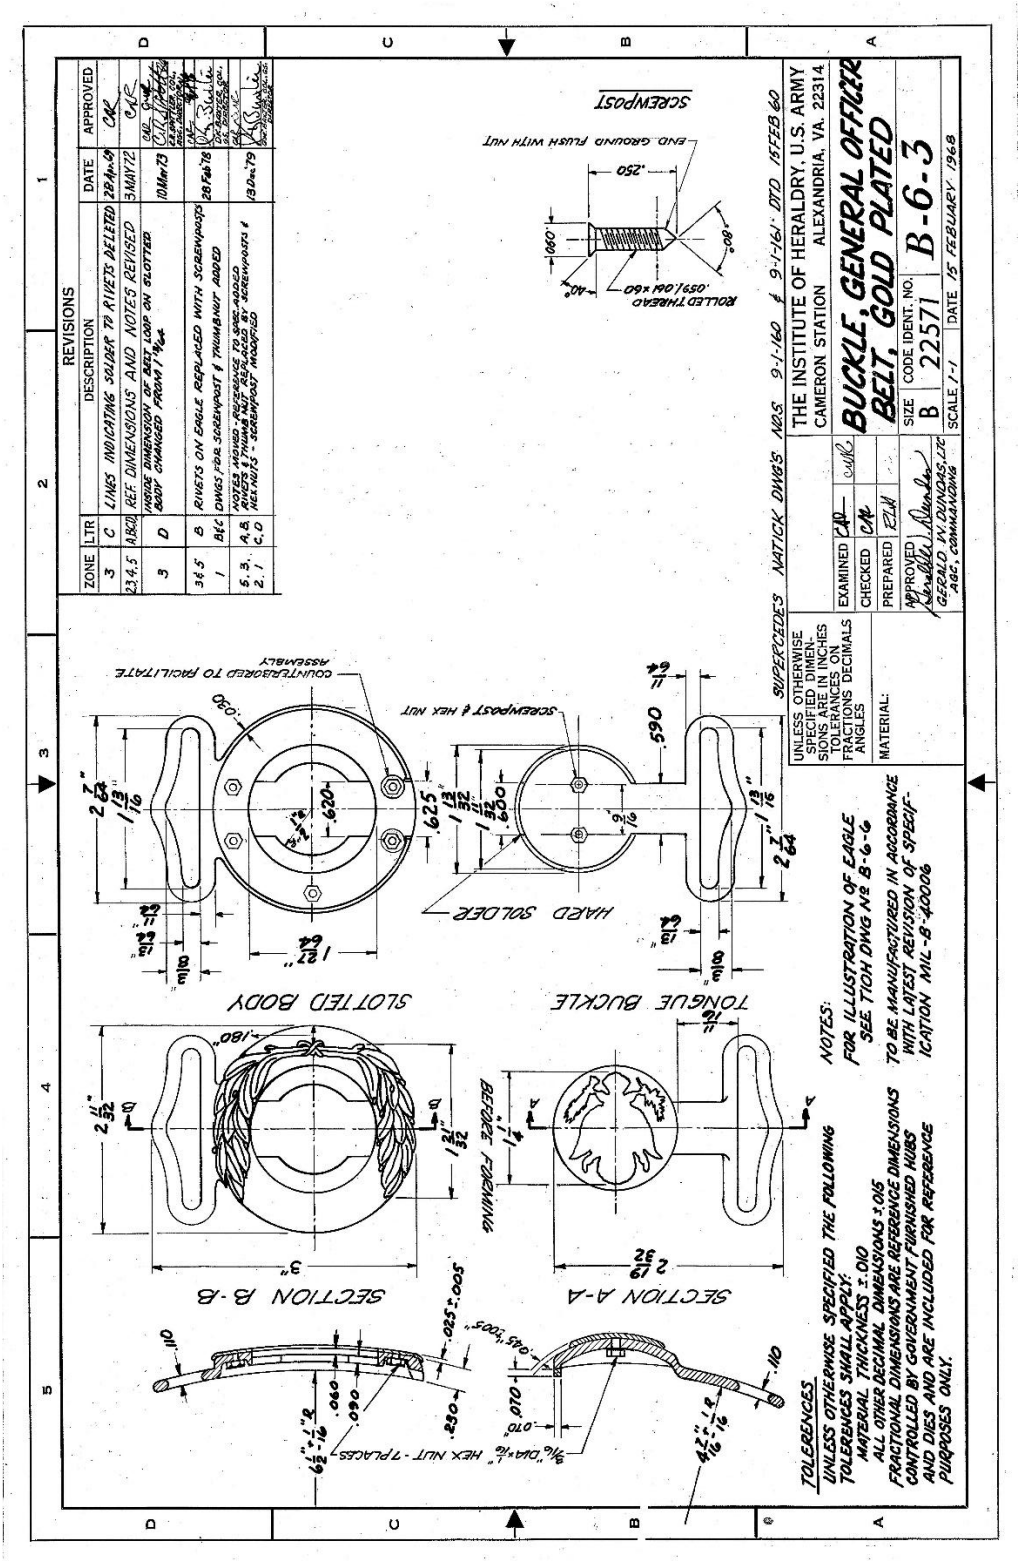


Figure 1. Buckle general officer belt, gold plated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

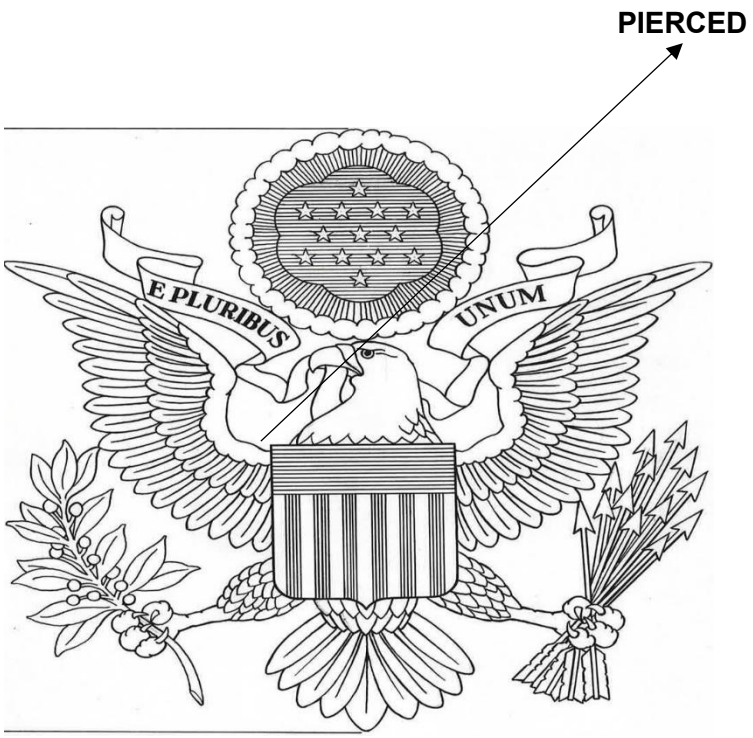


FIGURE 2. COAT OF ARMS

Custodians:
Army - IH
Navy - NU
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Navy - MC, CG1
DLA - CT

(Project No. 8455-2026-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.