INCH-POUND

MIL-C-40009E
29 March 1991
SUPERSEDING
MIL-C-40009D
21 June 1968

MILITARY SPECIFICATION

CABINETS, STORAGE, REPAIR PARTS AND TOOLS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers cabinets for the storage of repair parts and tools.

1.2 Classification. Cabinets covered by this specification shall be of the following types and classes, as specified (see 6.2):

Type I	-	35-1/2 inches high, 25 inches wide, 20 inches deep, (see figures 1, 2 and 3).
Class A	-	12 drawers and 1 door enclosed bin.
Class B	-	24 drawers and 1 door enclosed bin.
Class C	-	18 drawers and 1 door enclosed bin.
Type II	-	35-1/2 inches high, 34 inches wide, 17-7/8 inches deep, 3 door enclosed shelves (see figure 4).
Type III	-	54-1/2 inches high, 36-1/2 inches wide, 23 inches deep, (see figures 5 and 6).
Class A	-	42 drawers and 4 sliding trays.
Class B	-	18 drawers and 7 open bins.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5017 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 7125

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:01Z
Check the source to verify that this is the current version before use.

Type IV - 39 inches high, 46-3/4 inches wide, 23-9/16 inches deep, 14 drawers and lid enclosed top shelf (see figure 7).

Type V - 35-1/2 inches high, 25 inches wide, 27 inches deep, 11 drawers (see figure 8).

Type VI - 24 inches high, 25 inches wide, 16-3/8 inches deep, 3 expanded metal shelves (see figure 9).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

RR-C-271 - Chain and Attachments, Welded and Weldless
TT-C-490 - Cleaning Methods for Ferrous Surfaces and Pretreatments for Organic Coatings
TT-P-664 - Primer, Coating, Alkyd, Corrosion-Inhibiting, Lead and Chromate Free, VOC-Compliant
MMM-A-125 - Adhesive, Casein-Type, Water- and Mold-Resistant
MMM-A-188 - Adhesive; Urea-Resin-Type (Liquid and Powder)

MILITARY

MIL-E-15090 - Enamel, Equipment, Light-Gray (Formula No. 111)
MIL-M-17194 - Metal, Expanded, Steel
MIL-B-45977 - Bins, Cabinets, Shelving, and Worktables, Packaging Of

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-595 - Colors, Used in Government Procurement
FED-STD-H28 - Screw-Thread Standards for Federal Services

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-130 - Identification Marking of U.S. Military Property

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

U.S. ARMY NATICK RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER

5-13-2295 - Cabinets, Storage, Repair Parts and Tools: Type I, Cabinet Assembly, Class A, B and C
5-13-2296 - Type I, Class B and C, Drawer Assembly, Size "a"
5-13-2297 - Type I, Class A and C, Drawer Assembly, Size "b"
5-13-2298 - Type I, Class B and C, Drawer Assembly, Size "c"
5-13-2299 - Type I, Class A and C, Drawer Assembly, Size "d"
5-13-2300 - Cabinets, Storage, Repair Parts and Tools: Type II, Cabinet Assembly
5-13-2301 - Cabinets, Storage, Repair Parts and Tools: Type III, Cabinets Assembly, Class A and B
5-13-2302 - Type III, Class A, Sliding Tray Assembly
5-13-2303 - Type III, Class A and B, Drawer Assembly, Size "e"
5-13-2304 - Cabinets, Storage, Repair Parts and Tools: Type IV, Cabinet Assembly
5-13-2305 - Type IV, Drawer Compartment Assembly
5-13-2306 - Type IV, Drawer Assembly, Size "f"
5-13-2307 - Type IV, Drawer Assembly, Size "g"
5-13-2308 - Type IV, Drawer Assembly, Size "h"
5-13-2309 - Cabinets, Storage, Repair Parts and Tools: Type V, Cabinet Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

5-13-2310 - Type V, Drawer Assembly, Size "j"
5-13-2311 - Type V, Drawer Assembly, Size "k"
5-13-2312 - Cabinets, Storage, Repair Parts and Tools: Type VI, Cabinet Assembly, Expanded Metal

(Copies of drawings are available from the U.S. Army Natick Research, Development, and Engineering Center, ATTN: STRNC-UX, Natick, MA 01760-5017.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

A135.4 - Basic Hardboard
A208.1 - Mat-Formed Wood Particleboard

(Copies may be obtained from the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 366 - Steel, Sheet, Carbon, Cold-Rolled, Commercial Quality
A 510 - General Requirements for Wire Rods and Coarse Round Wire, Carbon Steel
A 569 - Steel, Carbon (0.15 Maximum, Percent) Hot-Rolled Sheet and Strip, Commercial Quality
A 853 - Steel Wire, Carbon, for General Use
D 2016 - Moisture Content of Wood

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:01Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3), in accordance with 4.3.

3.2 Materials. Materials shall conform to the applicable specifications, standards, and requirements specified herein and on the applicable drawings. Materials not specifically defined shall be as regularly used by the manufacturer. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.2.1 Steel.

3.2.1.1 Steel, sheet and strip. Sheet and strip steel components shall be fabricated from hot rolled or cold rolled steel conforming to ASTM A 569 and ASTM A 366.

3.2.1.2 Wire, steel. Steel wire components shall be fabricated from No.'s 1010, 1015 or 1020 of ASTM A 510, bare finish, annealed steel wire conforming to ASTM A 853.

3.2.1.3 Metal, expanded, steel. Panels for expanded metal components shall conform to type II, class 2, grade A of MIL-M-17194.

3.2.2 Wood. Wood for the core of composite wood tops shall be low density hardwood or softwood, having a minimum rated weight of 50 pounds per cubic foot conforming to ANSI A208.1. The moisture content of wood shall be determined in accordance with ASTM D 2016 at a 10 percent moisture content.

3.2.3 Hardboard. Hardboard for cabinet top veneers shall be a minimum 1/8 inch thick, class 1 tempered, conforming to ANSI A135.4. The hardboard of types I and V cabinets shall be smooth on two sides. For type IV cabinets, the hardboard shall be smooth on one side.

3.2.4 Particleboard. Particleboard for cabinet tops shall conform to ANSI A208.1, with the following indicated requirements and applications.

a. Particleboard core - type 1, grade 1-M-2.

b. Particleboard face and back veneers - type 1, grade 1-M-2, 3/8 inch thick, sanded two sides.

3.2.5 Adhesives. Adhesives for bonding cabinet tops shall conform to the following:

3.2.5.1 Adhesive, casein-type. Casein-type adhesive shall conform to type II of MMM-A-125.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

3.2.5.2 Adhesive, urea-resin-type. Urea-resin-type adhesive shall conform to type III of MMM-A-188.

3.2.5.3 Adhesive, thermosetting vinyl-emulsion type. Thermosetting vinyl-emulsion type adhesive shall meet the block shear strength, tension loading shear strength, both wet and dry, and pH requirements of MMM-A-188.

3.2.6 Primer. Primer shall conform to composition L of TT-P-664.

3.2.7 Enamel. Enamel shall conform to type III, class 2 of MIL-E-15090, except that the color shall be Olive Drab color No. 24087 of FED-STD-595.

3.2.8 Chain. Chains shall be type II, class 6, weldless, steel, zinc-coated safety chain conforming to RR-C-271.

3.3 Design and construction. The cabinets shall conform to the requirements specified herein and on the applicable drawings referenced in 2.1. Details not specifically defined shall be in accordance with the manufacturer's regular practice. Figures 1 through 9 are included herewith for ready identification of the various types and classes of cabinets, and to illustrate the major distinguishing features and overall dimensions applicable to each.

3.3.1 Welding. Welding, where specified or used as an option, may be used only in fabrication of the original item and shall not be used as a repair measure. All welds shall be accomplished in accordance with commercial practice, and shall be smooth, sound, and free from porosity, burned or reduced areas, fractures, and undercut. Welding scale shall be removed, and rough edges and projections shall be dressed smooth.

3.3.2 Fastening devices. Fastening devices shall be standard commercial items, fabricated from steel, and shall have a zinc or cadmium plated finish. Threaded fasteners shall be installed with lockwashers or self-locking nuts to prevent loss of tightness. Fastening devices subject to removal or adjustment shall not be peened, swaged, staked, or otherwise deformed to prevent adjustment or removal. All threaded parts shall be in the inch system and shall comply with FED-STD-H28.

3.3.3 Sheet metal components. All like bends of sheet metal components shall be of uniform radius, and unless otherwise specified on the drawings, radii shall be as small as practicable in relation to sheet metal thickness. All exposed sheet metal edges shall be free of sharp edges and burrs.

3.3.4 Riveting. When applicable, holes for rivets shall be of a diameter to insure a snug fit with the rivet shank after setting. When practicable rivet holes shall be drilled or punched at time of assembly. Burrs at rivet holes that may prevent proper seating of rivet heads shall be removed. Setting of

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

rivets shall be accomplished so that mating surfaces are drawn tight. The rivet heads shall be in full contact with mating surfaces, concentric with the rivet shank, and rivet heads shall be free from splits, burrs, and sharp edges.

3.3.5 Base and cabinet sides assembly. The cabinet base shall be assembled to the cabinet sides so that the assembled cabinet is not supported by any sheet metal edges.

3.3.6 Cabinet drawers. The cabinet drawers shall be equipped with stops wherever shown on applicable drawings. The drawer stops shall prevent drawer removal when opened in a normal manner, but shall permit drawers to be intentionally removed. Two drawer guides shall be furnished for each drawer in all cabinets. The sides of the cabinets may be used as guides for drawers adjacent to the sides. When the applicable drawings do not specifically define the configuration of the guides, the configuration shall be in accordance with the manufacturer's standard practice. All drawers of one size shall be interchangeable. The drawers shall operate smoothly without binding and shall not have more than 1/4 inch total side clearance between the drawers and drawer guides. The front face of drawers shall be flush with face of shelves within 1/16 inch. Fabrication of drawer ribs and slots shall be as shown on applicable drawings, or alternatively, the ribs and slots shall be the manufacturer's current method of fabrication, providing that equal compartmenting and rigidity capabilities as shown on the drawings are maintained.

3.3.7 Doors.

3.3.7.1 Bin doors. Bin doors shall be removable from the cabinets by sliding the open door to the right. Except for the bottom door of type II cabinets, each bin door on types I and II cabinets shall be equipped with two restraining chains specified in 3.2.8, located as shown on the applicable drawings. Restraining chains shall not be required for the bottom door of type II cabinets. The chains shall be of sufficient length to retain the open door in a horizontal plane. The chains shall be attached by bolting, welding, or riveting. The closed doors shall not extend more than 1/8 inch beyond the front edge of the shelf, and shall not recess more than 1/8 inch from the front edge of the shelf.

3.3.7.1.1 Bin door latches. The latching assembly for bin doors shall be fabricated of not less than 1/8 inch thick steel. The fixed portion shall be attached by welding or riveting. The pivoting handle shall be secured to the door by riveting. The attached latch shall have a positive engagement.

3.3.7.2 Full height doors. Full height double doors shall have the right-hand door equipped with a three point latching device, and the left-hand door equipped with a two point latching device. The latching mechanism shall be controlled by handles of the pivoting type. The handles shall be diecast brass, bronze or zinc alloy and shall be nickel or chromium plated. The doors shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

be recessed into the cabinet, with the front face of the doors flush with the front edge of the sides, top, and bottom. The door suspension shall permit removal of cabinet trays and drawers when the doors are opened 90 degrees.

3.3.7.3 Hinges. Hinges for bin doors and full height doors shall be fabricated from not less than 0.072 inch thick steel. Bin door hinges shall be a separating type. Hinge pins shall be not less than 0.120 inch diameter steel wire or rod. Hinge leafs shall be attached to the cabinets and doors by spot welding, as shown on applicable drawings, or by means of rivets or spot welds where not otherwise indicated. Unless otherwise shown on the drawings, each hinge leaf shall be attached by not less than three spot welds or two rivets.

3.3.8 Locking bars and guides, staples and pins. The locking bars and guides shall be fabricated of steel strips not less than 0.083 inch thick. The staples and pins shall be fabricated of flat or round steel wire. Chain specified in 3.2.8 shall be riveted to the pin and locking bar or last link interlocked in hole of locking bar. The locking bars shall hold the drawers in a closed position so that the drawer opens not more than 1/8 inch. The guides shall be welded as shown on the applicable drawings or may be attached by riveting.

3.3.9 Tops, composite wood. The finished thickness of the composite wood top for types I and V cabinets shall be 1-3/4 inches $\pm$ 1/16 inch. The top shall consist of core of glued-up wood blocks specified in 3.3.9.1, or particleboard specified in 3.2.4. The core option shall have a face and back veneer of hardboard specified in 3.2.3, or particleboard specified in 3.2.4. The face and back veneers shall be glued to the core using adhesive specified in 3.2.5.1, 3.2.5.2, or 3.2.5.3. The complete top shall be flat with no warpage greater than 1/8 inch, measured along the diagonals. Sides and ends shall be smooth and all edges and corners rounded with 1/64 inch minimum radius.

3.3.9.1 Wood block core. The wood block core shall be constructed of wood specified in 3.2.2, dried to a moisture content of not more than 10 percent at the time of gluing, when tested as specified in 4.4.2.1. The wood blocks and strips shall be free of unsound knots, tight knots over 1/4 inch in diameter, decay, pitch pockets, splits, holes and wrap. The core shall consist of random length blocks not more than 12 inches nor less than 5 inches long and not more than 1-3/4 inches wide, surfaced on two sides for gluing. Full length strips shall be used on the outer edges. The wood blocks and strips shall be glued into a solid core using adhesive specified in 3.2.5.1, 3.2.5.2, or 3.2.5.3, with the blocks parallel to the width dimension of the top. Blocks shall be closely butted with no opening more than 1/16 inch. After gluing and curing of the glue, the core shall be machined to a smooth uniform thickness for application of the face and back.

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:01Z
Check the source to verify that this is the current version before use.

3.3.10 Tops, hardboard and steel. Type IV cabinets shall have a hinged top fabricated of steel, with the lifting portion overlaid with hardboard specified in 3.2.3. The hardboard shall be riveted to the top as shown on the applicable drawings. After setting, the rivet heads shall be flush with or below the hardboard top surface. Two chains specified in 3.2.8 shall be located, one near each end of the top. The chains shall be fixed to the underside of the top and to the cabinet sides to retain the open top at approximately 20 degrees beyond the vertical.

3.3.11 Trays. Trays for type III, class A cabinets shall have tray stops provided to prevent the trays from striking the back plate when closed, and to keep the front edges aligned within 1/16 inch of the closed cabinet doors. The trays shall move freely between the tray guides with not more than 3/16 inch total side clearance between the trays and tray guides. Built-in stops shall be provided to prevent tray removal when opened in a normal manner, but shall permit trays to be intentionally removed.

3.3.11.1 Tray pins. Unless otherwise specified (see 6.2), each tray shall be furnished with 30 tray pins conforming to requirements shown on the applicable drawings. The pins shall be installed in 11 front and 11 rear holes, and in 4 holes on each side of the tray. The pins shall be set hard against their shoulders and secured by speed nuts.

3.4 Finish.

3.4.1 Surface preparation. Prior to painting, metal surfaces of the cabinets shall be cleaned and treated in accordance with method I through VI or type III or IV of TT-C-490.

3.4.2 Priming and enameling. Surfaces treated as specified in 3.4.1 shall be coated with primer specified in 3.2.6. Primed surfaces shall then be coated with enamel specified in 3.2.7. The enamel shall be air dried or baked in accordance with the paint manufacturer's directions. The enamel shall level out to produce a smooth, uniform surface without runs, wrinkles, grit, areas of no film and separation of color.

3.5 Assembly. Unless otherwise specified (see 6.2), types II and VI cabinets shall be furnished knocked-down. All other types of cabinets shall be furnished setup. Tools required for assembly shall be limited to regularly available screwdrivers, wrenches, and pliers.

3.5.1 Assembly instructions. Each knocked-down cabinet shall be furnished with a copy of assembly instructions. The instructions shall describe in a clear, concise manner the procedure to follow in assembly. All component parts, when practicable, shall be legibly marked for identification and cross reference with the assembly instructions. The instructions shall be sealed in a waterproof envelope and secured to a cabinet component.

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:01Z
Check the source to verify that this is the current version before use.

3.6 Identification marking. Each cabinet shall be marked in accordance with the unit marking requirements of MIL-STD-130.

3.7 Structural rigidity. The cabinets shall be capable of withstanding the vibration test in 4.5.2, while the cabinets are subjected to proof loads not less than indicated in table I, and with the cabinets secured closed by the means provided. During conduct of the test, the doors shall not be open, and loaded drawers and trays shall remain in the fully closed position. After testing, examination shall reveal no permanent deformation, sags, cracks in or around welds, bent bolts, pulled rivets, or distortion of any component. All drawers, trays, doors, hinged components, and sliding trays shall operate normally without evidence of binding or misalignment.

TABLE I. Minimum capacity proof loads of individual drawers, bins, trays, shelves

	Cabinet types - proof load in lbs.						
Drawer size	I	II	IIIA	IIIB	IV	V	VI
a	25						
b,c	50						
d	100						
e			25	25			
f					20		
g,h					60		
j						100	
k						75	
Small bin	100			100			
Large bin				300			
Shelf		100			30		100
Tray			50				
Total proof load	1000	300	1250	1350	750	850	300

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:01Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. The end item shall be clean and free of corrosion, burrs, snags, and rough or sharp edges. All functioning components shall operate smoothly without binding. There shall be no loose or misplaced components, and the assembled cabinets shall be in proper alignment. Knocked-down cabinets shall be readily assembled without the need to modify or rework any component. Painted and plated surfaces shall be uniformly coated, dry, free from runs, sags, teardrops, foreign matter, chips, scratches, blisters, flicking and peeling.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)
b. Quality conformance inspection (see 4.4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.3.1 and 4.4.3.2. and shall be tested for the characteristics specified in 4.5.1 and 4.5.2. Any nonconformance shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.2 In-process inspection.

4.4.2.1 Testing for moisture content of wood. The moisture content of wood requirement in 3.3.9.1 shall be determined in accordance with ASTM D 2016 at time of assembly. When testing is performed by the electric moisture meter method, three determinations shall be made on each sample unit to the nearest 0.05 percent. The average of the three determinations shall be the moisture content of the sample unit. The lot shall be all the machined components prepared under the same conditions, stored as a group, and offered for inspection at one time. The sample unit shall be one machined component. The inspection level shall be S-1, and the acceptable quality level (AQL) expressed in terms of defects per hundred units shall be 4.0.

4.4.2.2 In-Process examination. Examination shall be made during the manufacturing process to determine compliance with the surface preparation and priming requirements in 3.4.1 and 3.4.2. Whenever nonconformance is noted, correction shall be made to the affected items and process. Items which cannot be corrected shall be removed from production.

4.4.3 End item inspection. The lot shall be all cabinets of the same type and class offered for inspection at one time. The sample unit shall be one completely assembled cabinet or, when knocked-down cabinets are required, all of the finished components required to completely assemble one knocked-down cabinet.

4.4.3.1 End item visual examination. The end items shall be examined for the defects listed in table II. The lot size shall be expressed in units of cabinets. The sample unit shall be one complete cabinet. The inspection level shall be II. The AQL, expressed in terms of defects per hundred units, shall be 2.5 for major defects and 6.5 for total (major and minor combined) defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects

Examine	Defect	Classification Major	Minor
Finish, metal components	Color not as specified		201
	Area of no finish		202
	Discoloration or foreign matter imbedded		203
	Not adherent, flaky or blistered		204
	Indication of rust under finish	101	
	Not smooth; i.e., sags, runs, drips, lap, wrinkles or orange peel		205
Construction and workmanship	Assembly out of square	102	
	Any part broken, split, fractured, cracked or malformed	103	
	Any component missing (except fasteners)	104	
	One bolt, nut, washer or rivet missing		206
	More than one bolt, nut, washer or rivet missing	105	
	Any sharp or protuding edge	106	
	Any fastening device not secured		207
	Bolt or nut peened, swaged or staked		208
	Cabinets of the same type and class not identical throughout	107	
Tops	Not specified construction	108	
	Not attached as specified		209
	Rivets or bolt heads not flush with or below surface of hardboard		210
	Type IV top does not open beyond vertical	109	
Composite wood tops	Open glue joint in exposed core, or between face or back and core	110	
	Warp exceeding 1/8 inch		211
	Hole, gouge, split or damage to top surface	111	
	Sides and ends not smooth		212
	Edges and corners not rounded with 1/64 inch minimum radius		213
Drawers and trays	Cannot be removed	112	
	Not interchangeable (as applicable)	113	
	Retaining stops missing (when required)	114	
	Tray pins not installed (when applicable)	115	

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:01Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Doors, bin	Not removable	116	
	Chain missing	117	
	Chains do not hold door open at horizontal plane		214
Door, full height	Will not close	118	
	Prevents removal of drawer or tray	119	
	Not contained within sides, top and bottom when closed	120	
Locking bars	Do not hold drawers closed within 1/8 inch		215
Welds	Not dressed smooth		216
	Spot weld missing	121	
	Not sound (fractured, burned through or reduced)	122	
	Spot welds not located where specified		217
Assembly instruction (when required)	Missing		218
	Incomplete, incorrect or illegible		219
	Not sealed in a waterproof envelope		220
Identification marking	Illegible, incorrect, incomplete, or improperly applied		221

4.4.3.2 End item dimensional examination. The end items shall be examined for defects in dimensions, including paint thickness (when primer is omitted). Only those dimensions that can be evaluated without damaging or disassembling the end items shall be examined. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressd in units of cabinets. The sample unit shall be one complete cabinet. The inspection level shall be S-2, and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.3.3 End item testing. When knocked-down cabinets are required, the cabinets shall be assembled and examined as specified in 4.5.1. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5. In addition, when a preproduction sample (first article), is not required (waived), the initial production unit shall be tested in accordance with 4.5.2 (vibration testing) with no evidence of failure. The initial

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

production unit, regardless of type and class (supplied, assembled or unassembled), shall be vibration tested as specified in 4.5.2 when first article testing is waived.

4.4.4 Packaging inspection. The inspection shall be in accordance with the quality assurance provisions of MIL-B-45977.

4.5 Methods of inspection.

4.5.1 Assembly of knocked-down cabinets. Knocked-down cabinets shall be assembled in accordance with the assembly instructions (see 3.5.1) to determine compliance with the applicable requirements in 3.5 and 3.8. After assembly, the cabinets shall be examined for the applicable defects listed in table II. The lot size shall be expressed in units of cabinets. The sample size shall be one complete cabinet.

4.5.2 Vibration. The applicable assembled cabinet, proof loaded as specified in 3.7 and table I, shall be fastened to a vibration machine at the base mounting holes, and at the top and at the mounting bracket when applicable, and subjected to simple harmonic motions having an amplitude of 1/16 inch (1/8 inch total excursion) at a frequency of 600 cycles per minute for a total of 36,000 cycles in the direction of the vertical axis. The cabinets shall then be examined for compliance with 3.7. Any nonconformance shall constitute failure to pass this test.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Levels A and Commercial. The cabinet shall be preserved in accordance with the applicable requirements of MIL-B-45977.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Levels A, B, and Commercial. The cabinet shall be packed in accordance with the applicable requirements of MIL-B-45977.

5.3 Marking. In addition to any special marking required in the contract or purchase order, shipments shall be marked in accordance with the requirements of MIL-B-45977.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The storage cabinets are intented to be used in maintenance shops and on shop trucks for storage of spare parts and tools.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Type and class required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.3, and 6.3).
e. When types II and VI shall be furnished setup (see 3.5).
f. When more or less than 30 pins are required for each tray (see 3.3.11.1).
g. Levels of preservation and packing (see 5.1 and 5.2).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of Federal Acquisition Regulation (FAR) 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection and approval of the first article.

6.4 Subject term (key word) listing.

Drawers
Tool box
Tool storage
Workbench

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Navy - MC
Air Force - 99

Review activities:

Air Force - 84
DLA - GS

User activities:


Army - CE, AV

PREPARING ACTIVITY:

Army - GL

(Project 7125-0130)


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

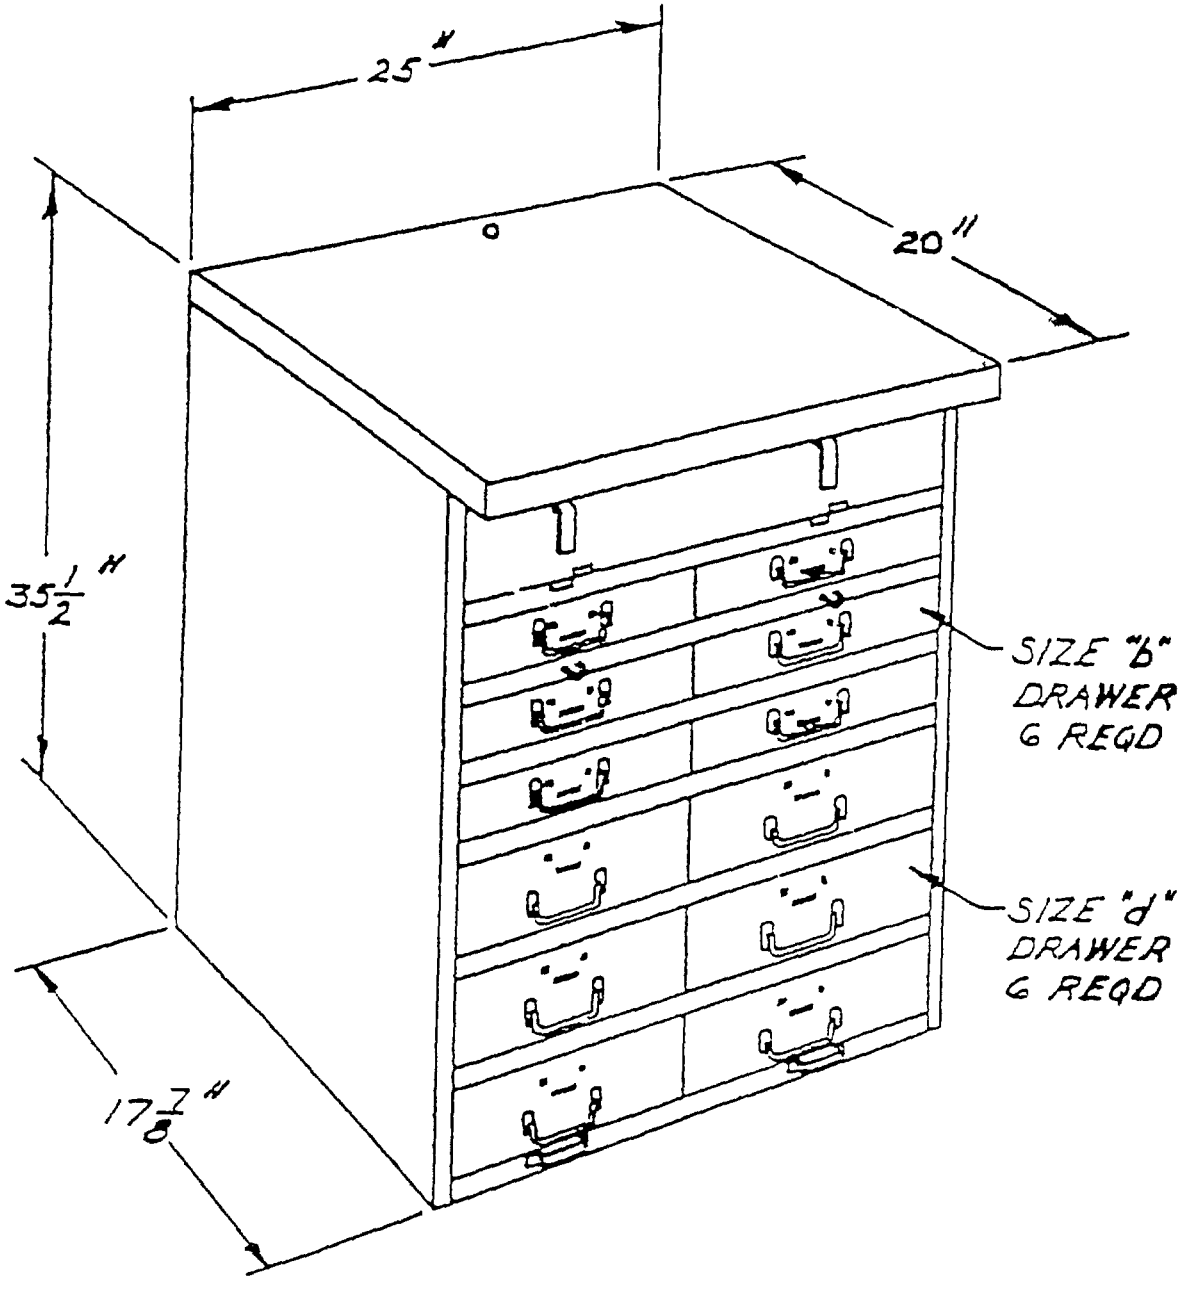

NOTES:
1. LOCKING BARS NOT SHOWN.
2. ALL DIMENSIONS ARE REFERENCE.

FIGURE 1. TYPE-I, CLASS-A

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:01Z
Check the source to verify that this is the current version before use.

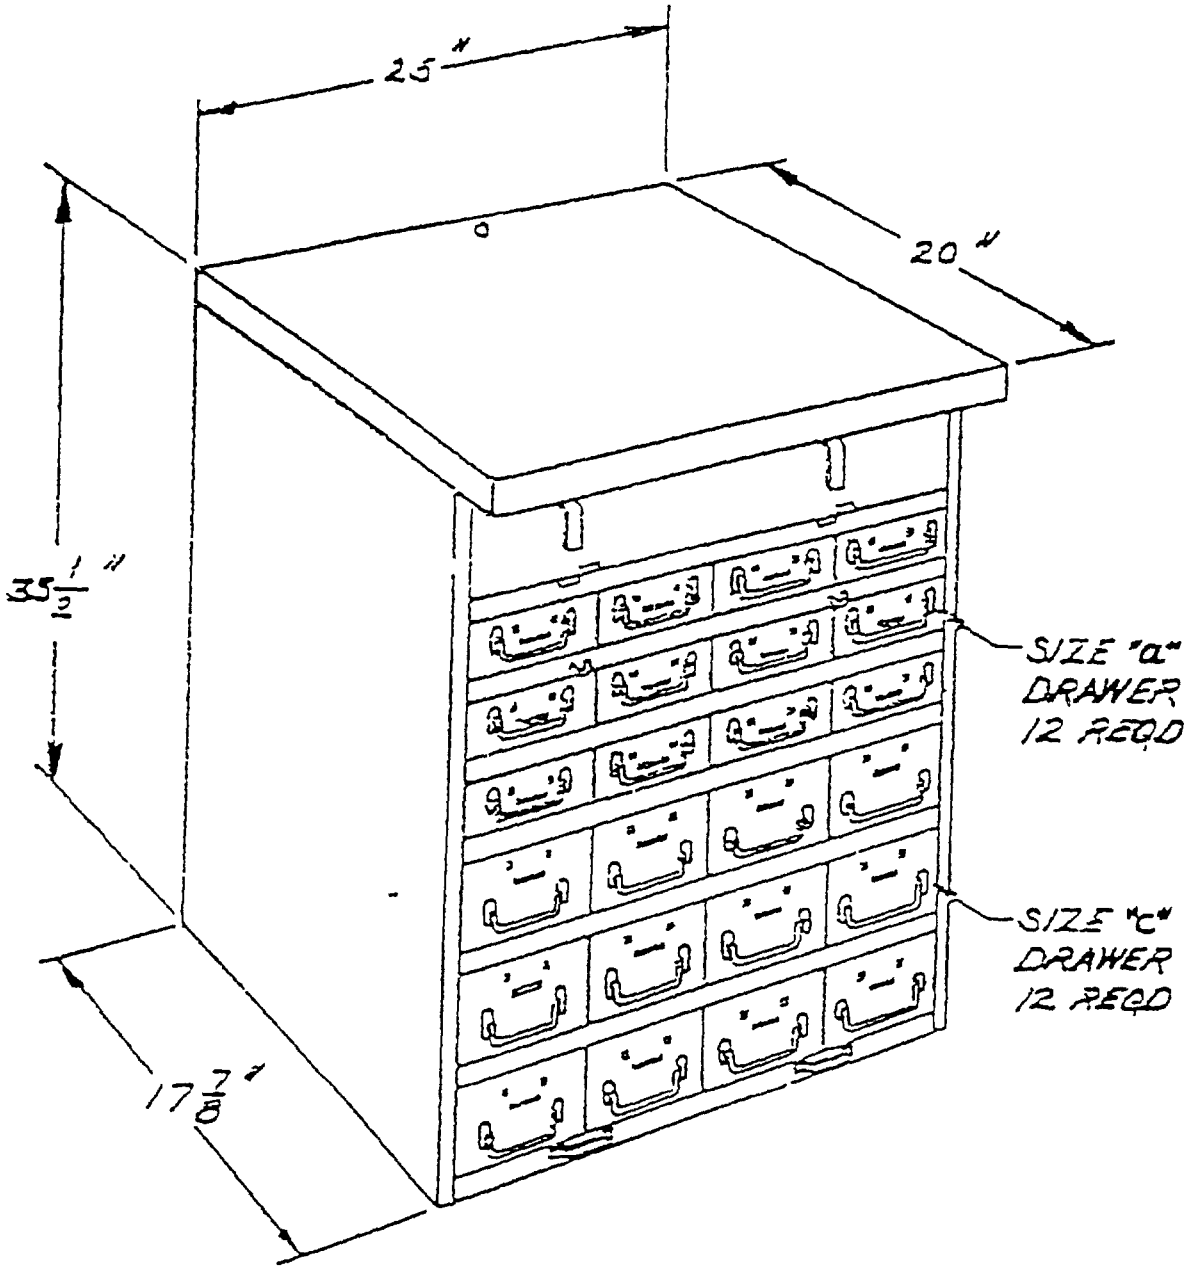


NOTES:

1. LOCKING BARS NOT SHOWN.
2. ALL DIMENSIONS ARE REFERENCE.

FIGURE 2. TYPE-I, CLASS-B


Source: https://assist.dla.mil -- Downloaded: 20260-21T19:01Z
Check the source to verify that this is the current version before use.

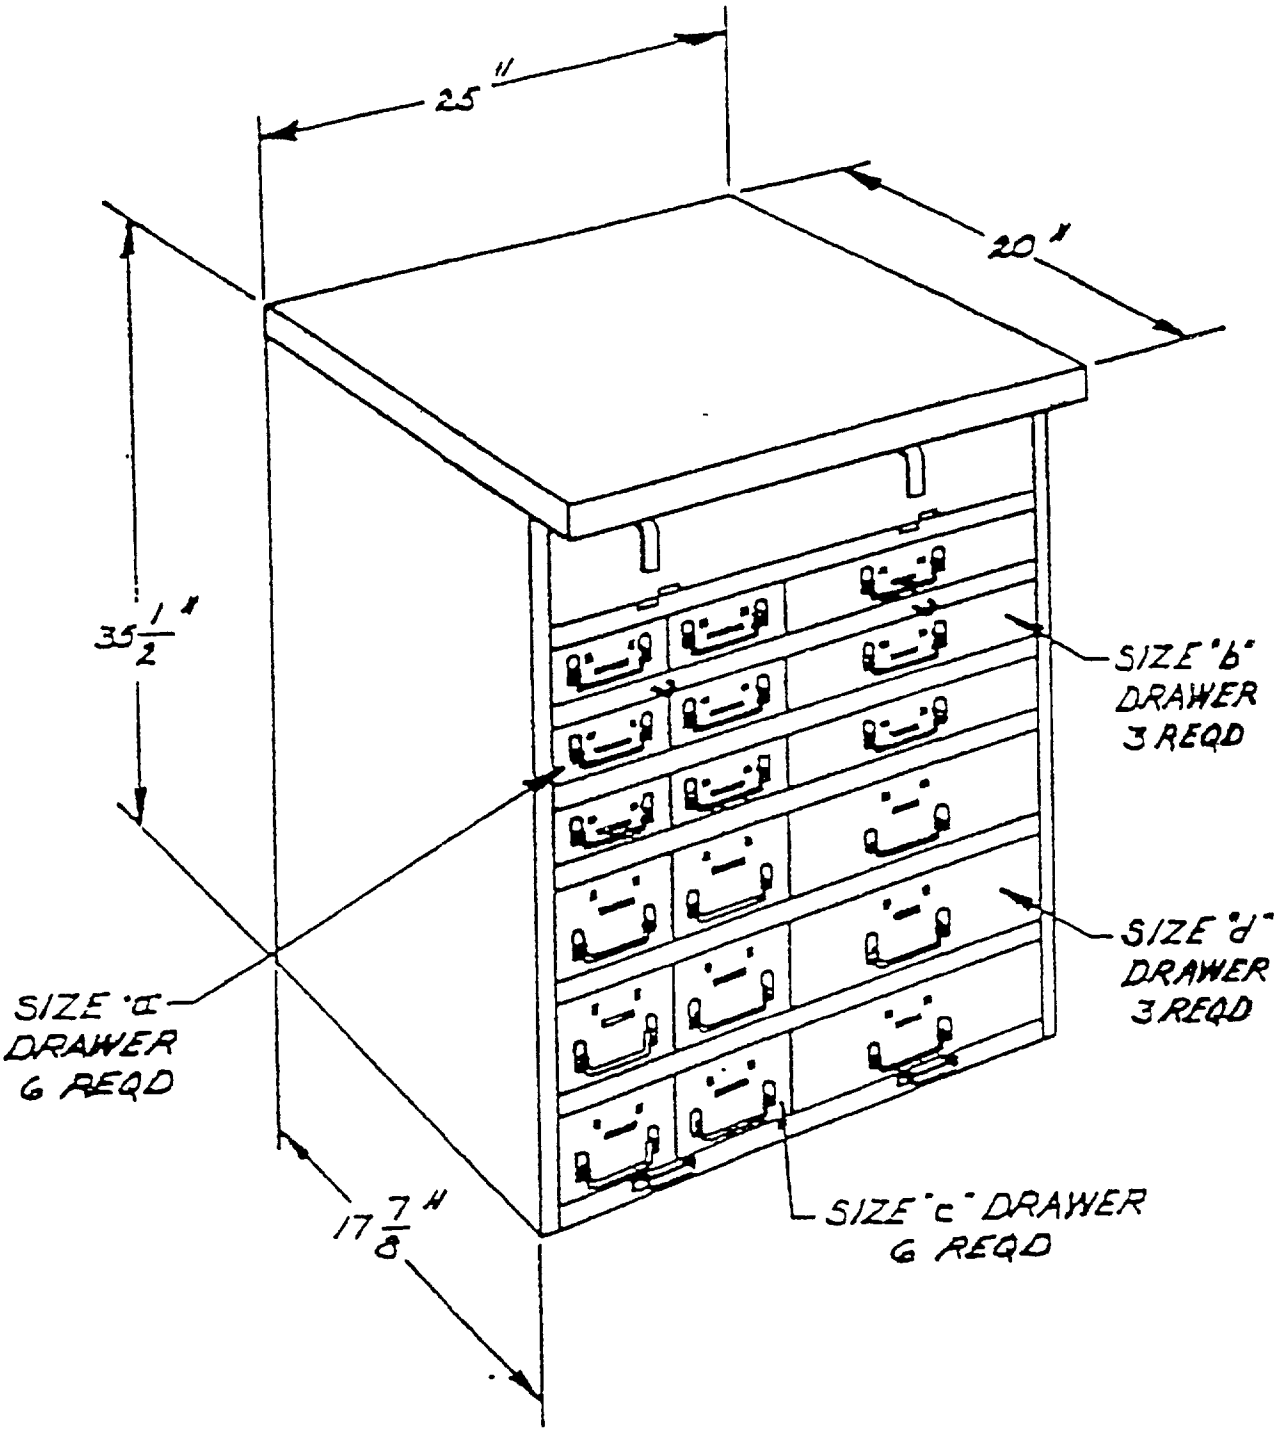

NOTES:
1. LOCKING BARS NOT SHOWN.
2. ALL DIMENSIONS ARE REFERENCE.

FIGURE 3. TYPE-I, CLASS-C


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

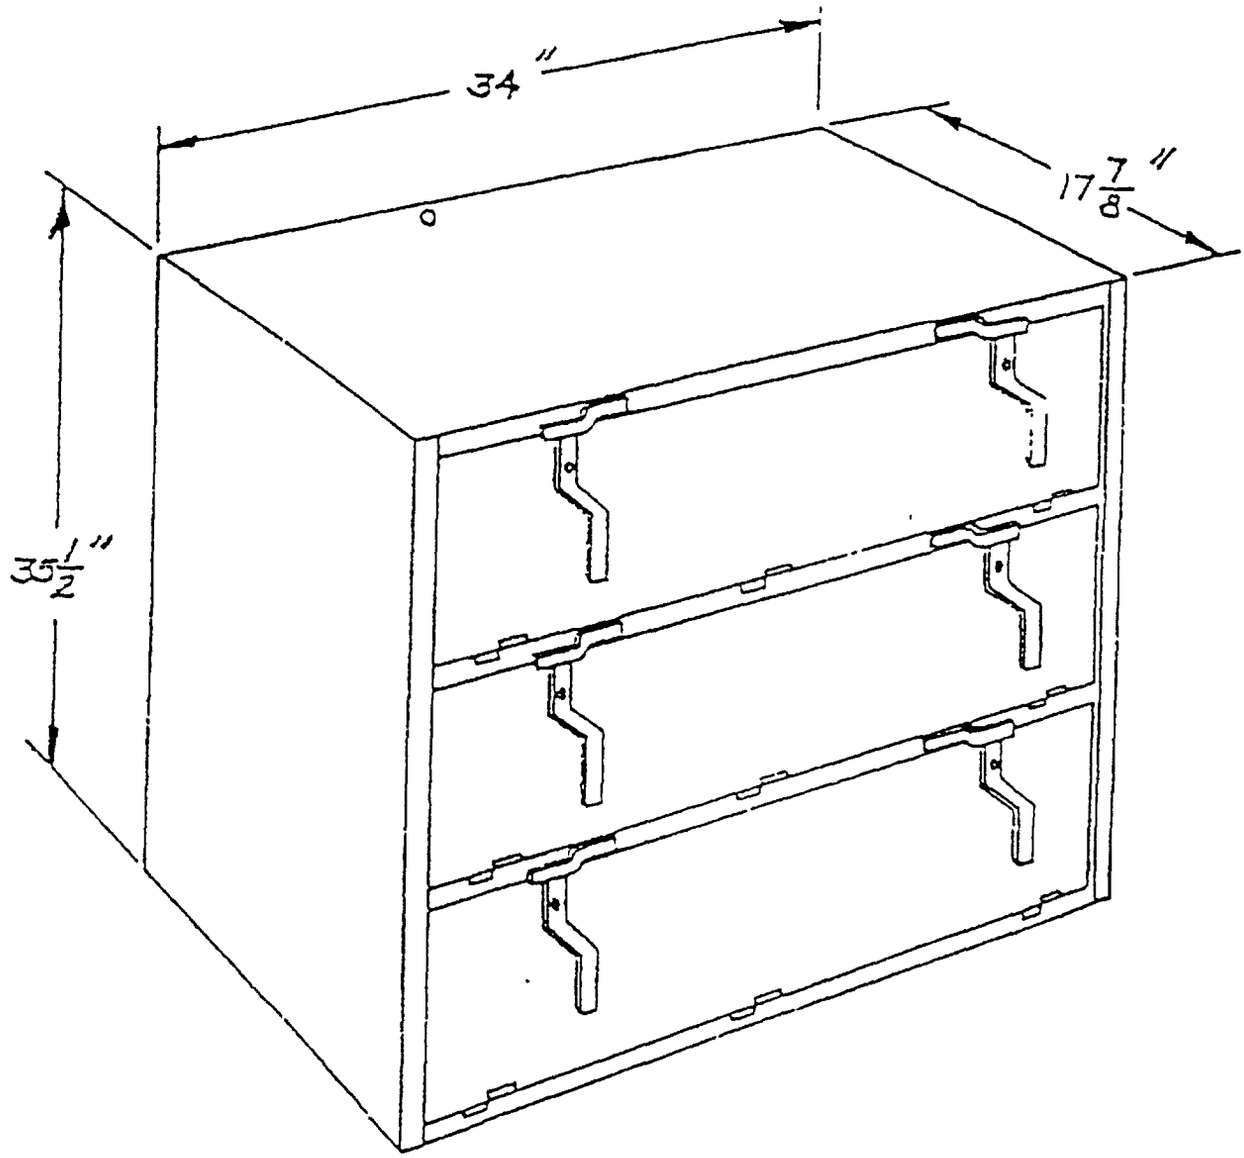

NOTE:
ALL DIMENSIONS ARE REFERENCE.

FIGURE 4. TYPE II


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

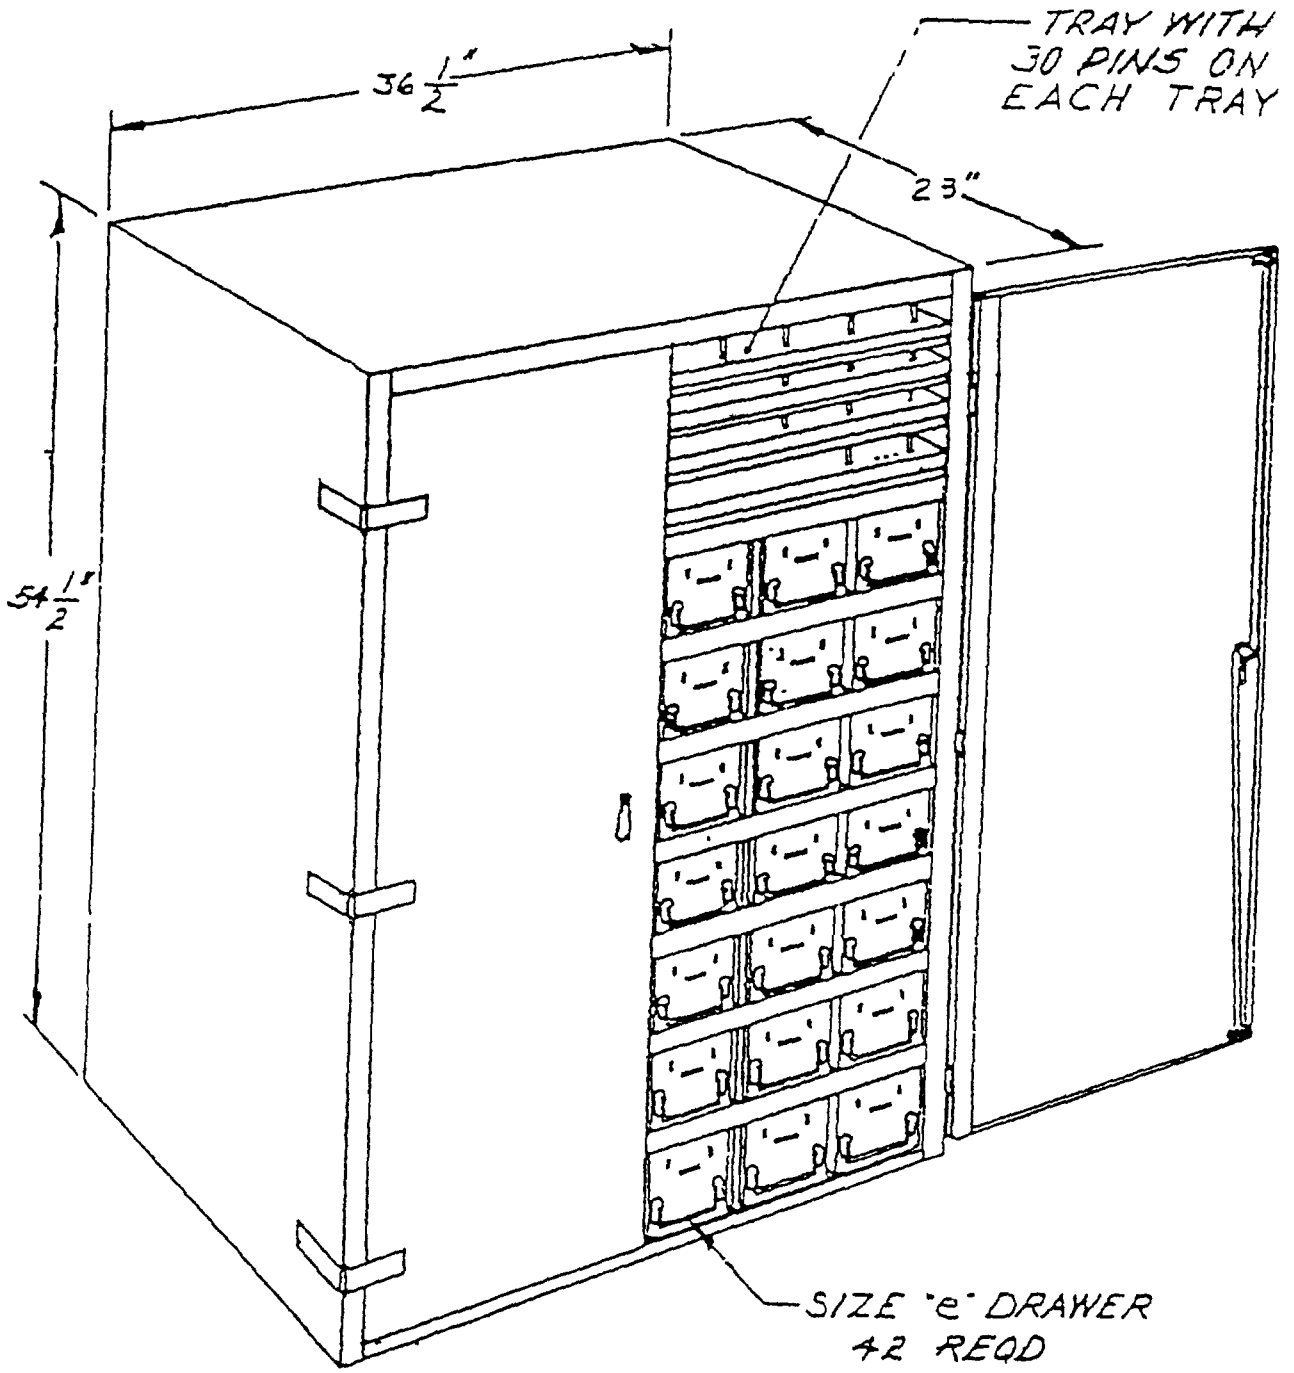

NOTE:
ALL DIMENSIONS ARE REFERENCE.

FIGURE 5. TYPE III, CLASS A


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

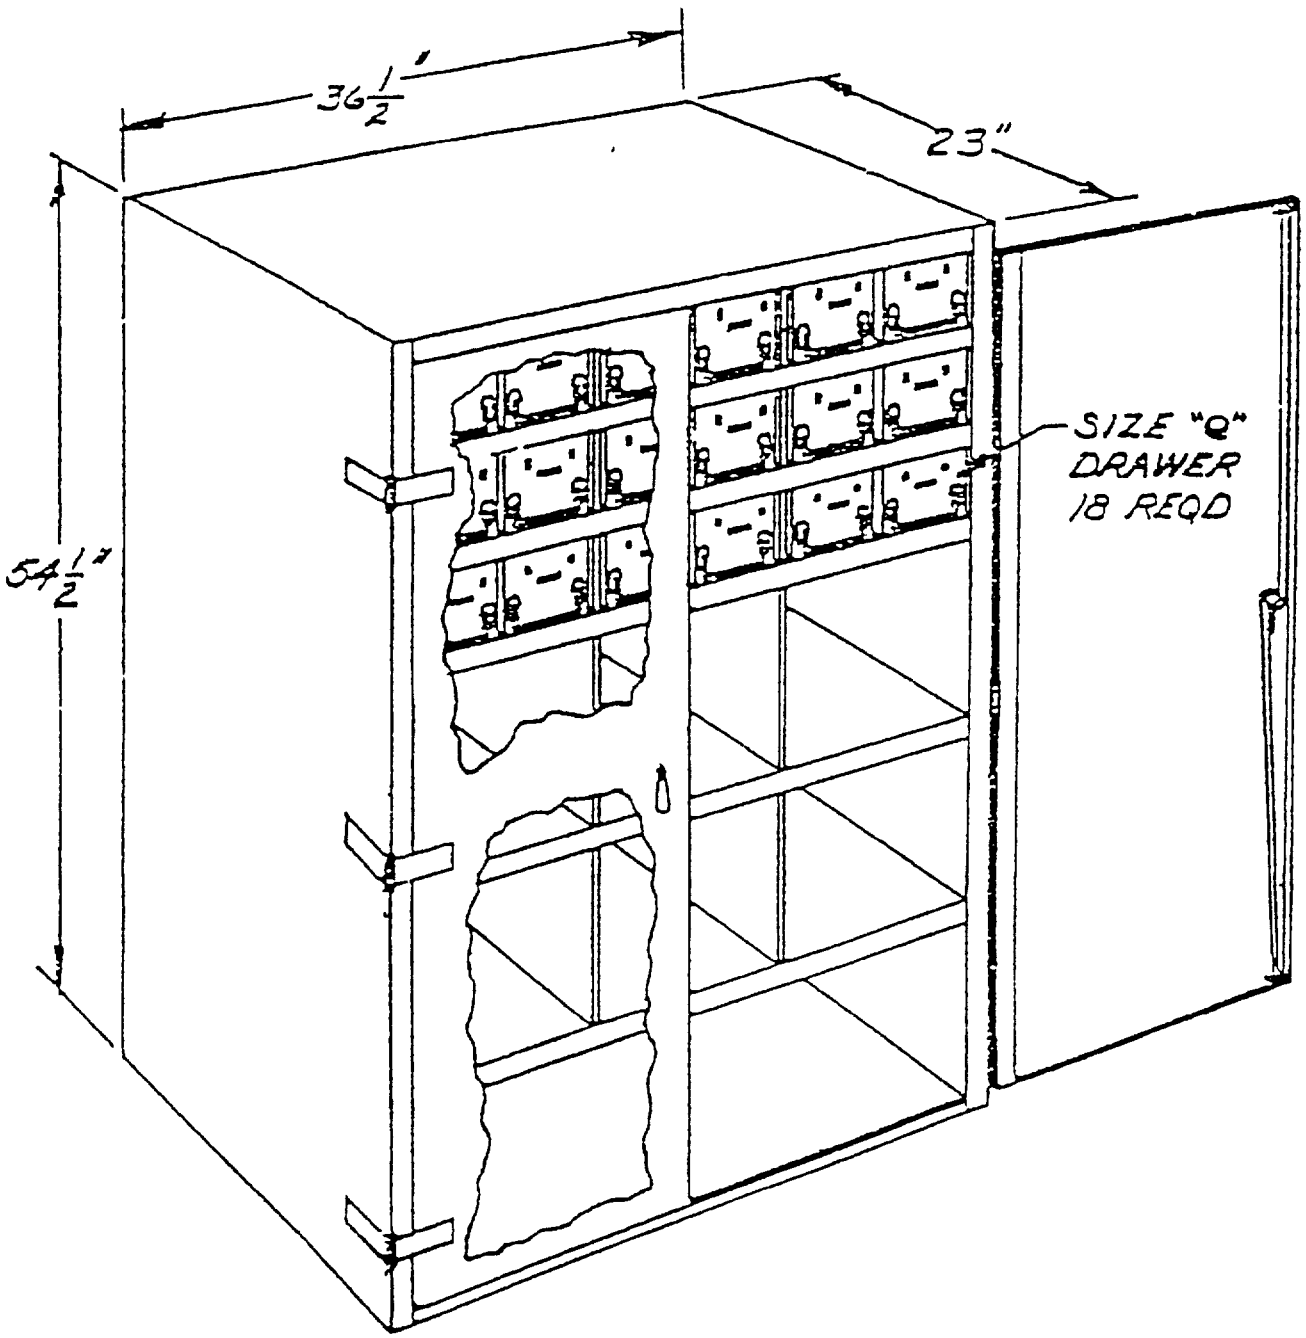

NOTE:
ALL DIMENSIONS ARE REFERENCE.

FIGURE 6. TYPE III, CLASS B


Source: https://assist.dla.mil -- Downloaded: 202640-21T19:01Z
Check the source to verify that this is the current version before use.

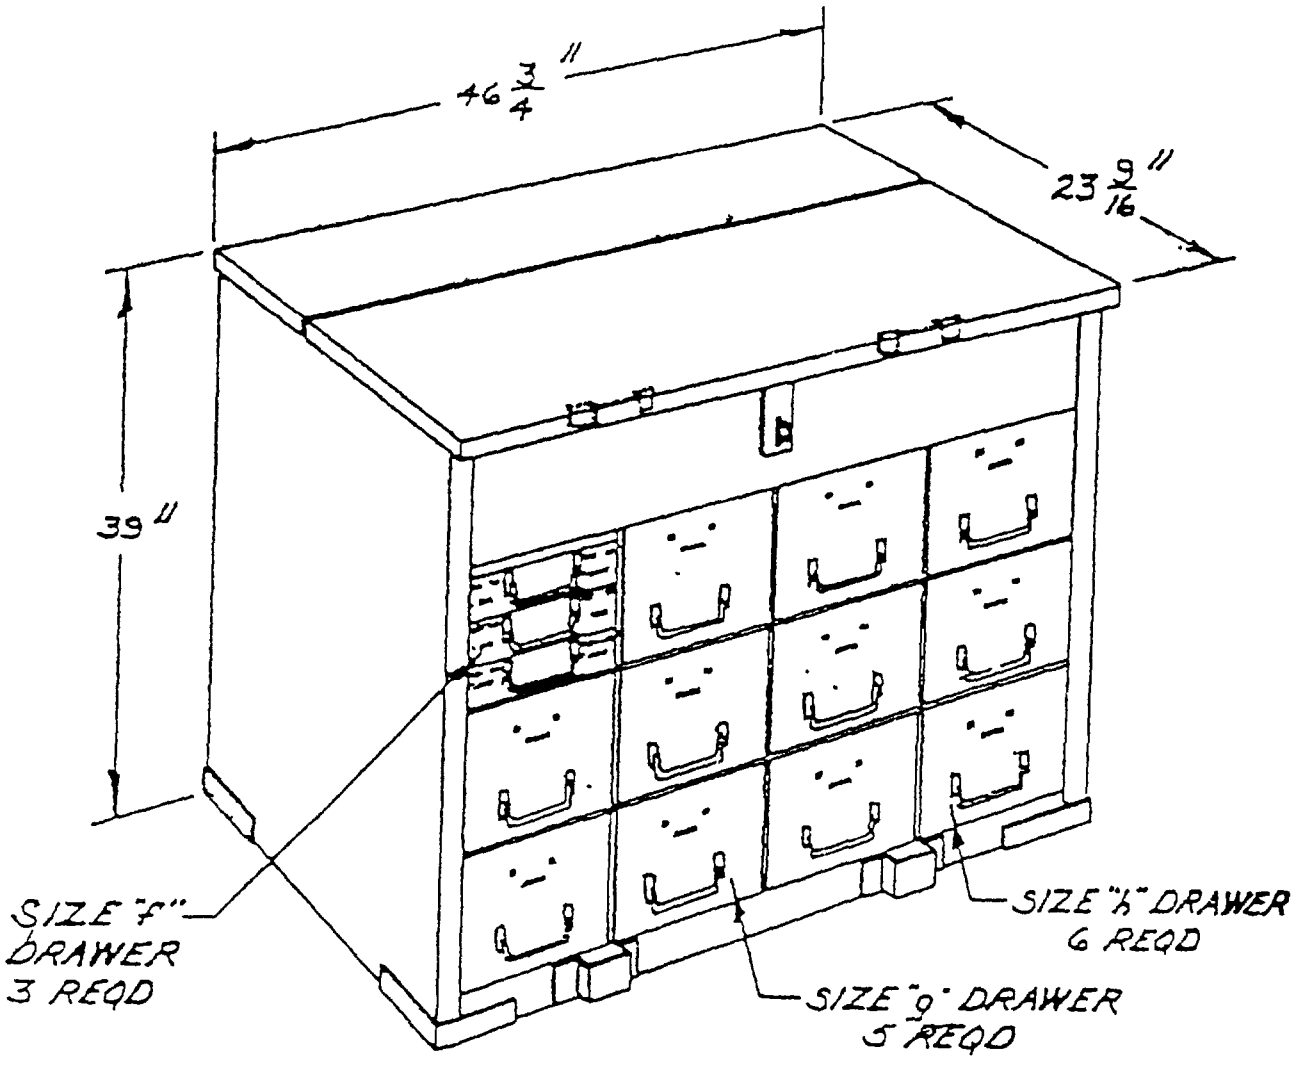

NOTES:
1. LOCKING BARS NOT SHOWN.
2. ALL DIMENSIONS ARE REFERENCE.

FIGURE 7. TYPE IV


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

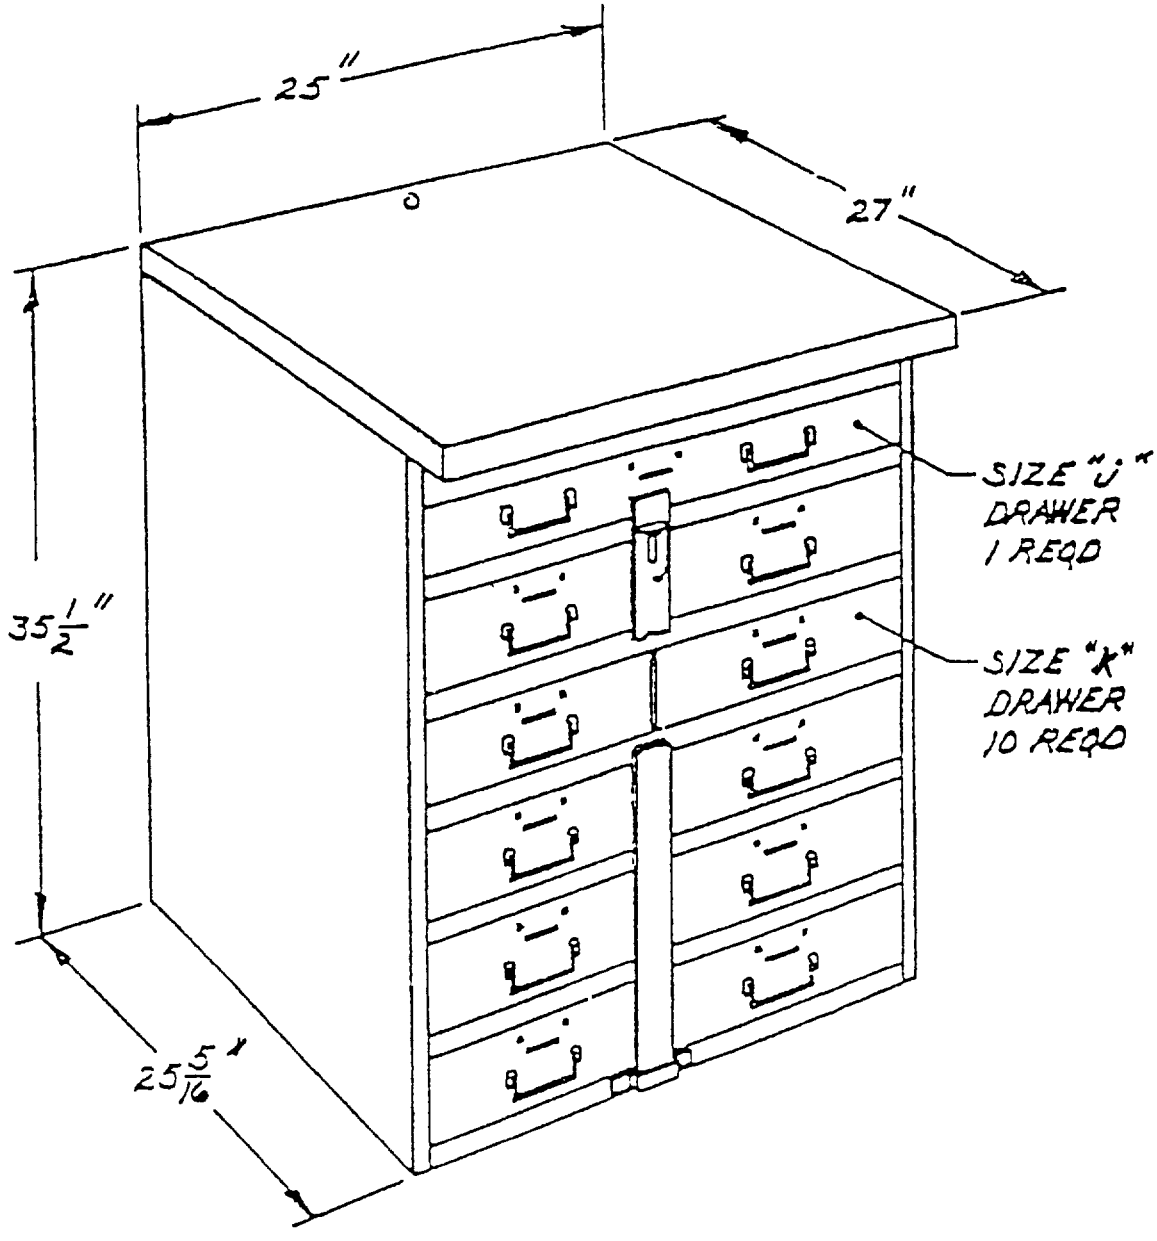

NOTE:
ALL DIMENSIONS ARE REFERENCE.

FIGURE 8. TYPE V

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

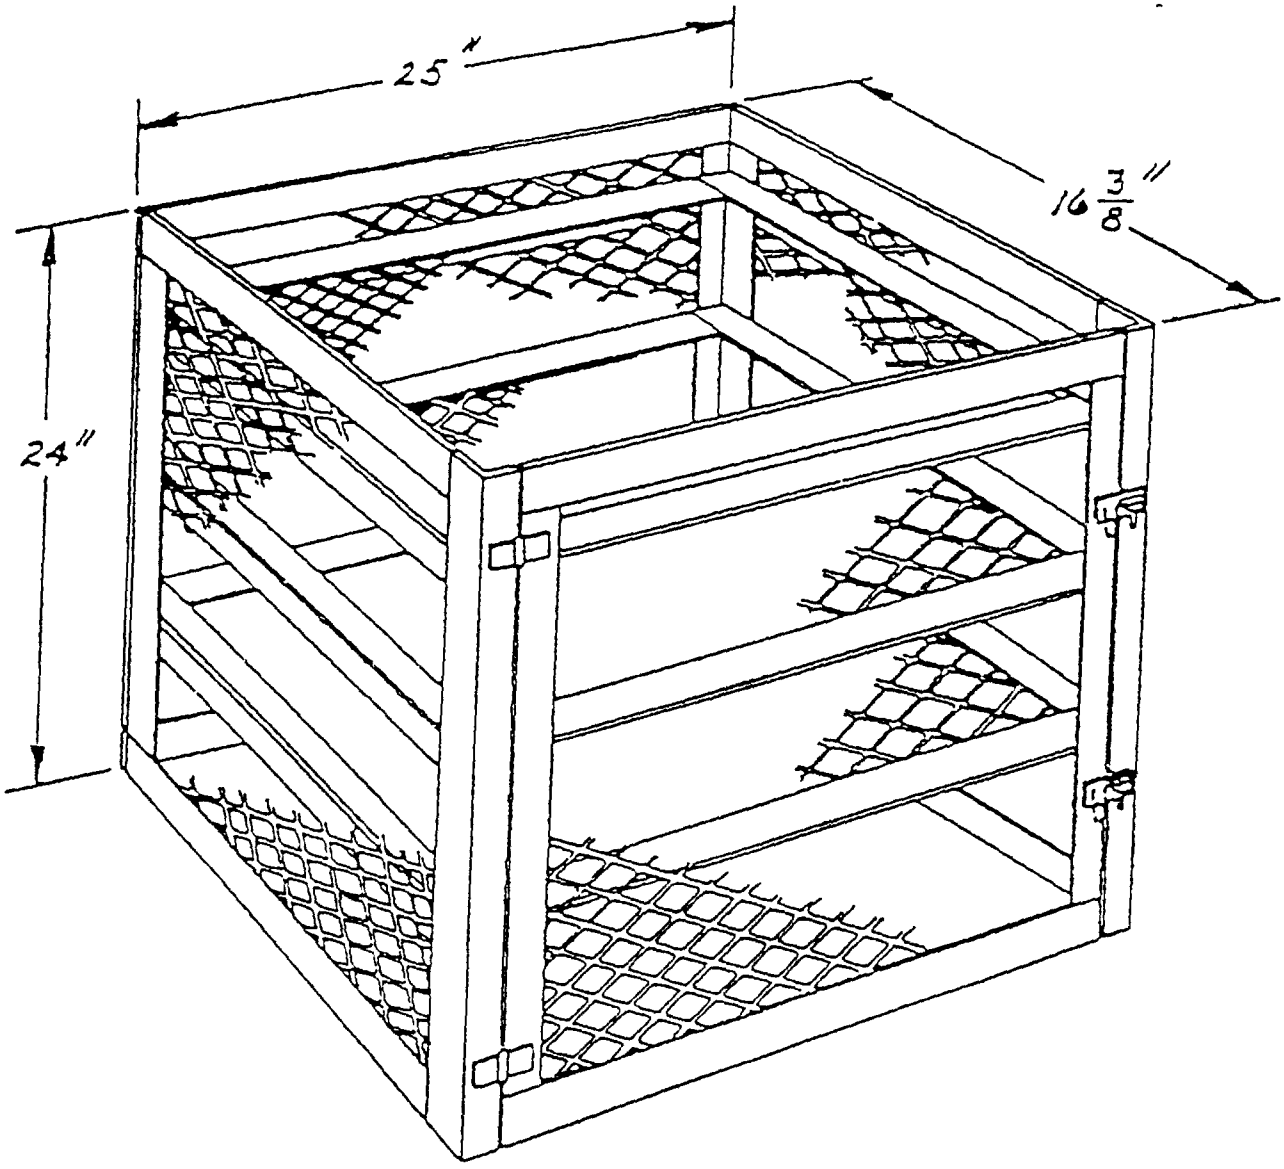

NOTE:
ALL DIMENSIONS ARE REFERENCE.

FIGURE 9. TYPE VI

*U.S. GOVERNMENT PRINTING OFFICE 1991--504-034/50302

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER [illegible]-400092	2 DOCUMENT DATE (YYMMDD) 91 March, 2[illegible]

3 DOCUMENT TITLE
CABINETS, STORAGE, REPAIR PARTS AND TOOLS

4 NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5 REASON FOR RECOMMENDATION

6 SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY

a NAME	b TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
J.S Army Natick RD&E Center	508-651-4531	256-4531
c ADDRESS (Include Zip Code) Commander, U S. Army Natick RD&E Center ATTN STRNC-UXT Natick, MA 01760-5017	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil - Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.