INCH POUND

MIL-DTL-40009F
30 September 2025
SUPERSEDING
MIL-C-40009E
29 March 1991

# DETAIL SPECIFICATION

# CABINETS, STORAGE, REPAIR PARTS AND TOOLS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers cabinets for the storage of repair parts and tools.

1.2 Classification. Cabinets covered by this specification may be of the following types and classes, as specified (see 6.2):

Type I - 35.500 inches high, 25 inches wide, 20 inches deep, (see figures 1, 2 and 3).
Class A - 12 drawers and 1 door enclosed bin.
Class B - 24 drawers and 1 door enclosed bin.
Class C - 18 drawers and 1 door enclosed bin.

Type II - 35.500 inches high, 34 inches wide, 17.875 inches deep, 3 door enclosed shelves (see figure 4).

Type III - 54.500 inches high, 36.500 inches wide, 23 inches deep, (see figures 5 and 6).
Class A - 42 drawers and 4 sliding trays.
Class B - 18 drawers and 7 open bins.

Type IV - 39 inches high, 46.750 inches wide, 23.563 inches deep, 14 drawers and lid enclosed top shelf (see figure 7).

Type V - 35.500 inches high, 25 inches wide, 27 inches deep, 11 drawers (see figure 8).

Type VI - 24 inches high, 25 inches wide, 16.375 inches deep, 3 expanded metal shelves (see figure 9).

## 2. APPLI CABLE DOCUMENTS

2. 1 General. The documents listed in this section are specified in section 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Comments, suggestions, or questions on this document should be addressed to DLA Troop Support – Construction and Equipment (C&E) (ATTN: Code FCSB), 700 Robbins Avenue Philadelphia, PA 19111-5096 or e-mail to CE_Standardization@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 7125

DISTRIBUTION STATEMENT A. Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

FEDERAL SPECIFICATIONS

RR-C-271 - Chains and Attachments, Carbon and Alloy Steel
TT-C-490 - Chemical Conversion Coatings and Pretreatments for Metallic Substrates (Base for Organic Coatings)

FEDERAL STANDARDS

FED-STD-H28 - Screw-Thread Standards for Federal Services

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-15090 - Enamel, Equipment, Light Gray (navy Formula No. 111)

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-130 - Identification Marking of U.S. Military Property

(Copies of these documents are available online at https://assist.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government Documents, Drawings, and Publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

U.S. ARMY COMBAT CAPABILITIES DEVELOPMENTCOMMAND SOLDIER CENTER DRAWINGS

5-13-2295 - Cabinets, Storage, Repair Parts and Tools: Type I, Cabinet Assembly, Class A, B and C
5-13-2296 - Type I, Class B and C, Drawer Assembly, Size “a”
5-13-2297 - Type I, Class A and C, Drawer Assembly, Size “b”
5-13-2298 - Type I, Class B and C, Drawer Assembly, Size “c”
5-13-2299 - Type I, Class A and C, Drawer Assembly, Size “d”
5-13-2300 - Cabinets, Storage, Repair Parts and Tools: Type II, Cabinet Assembly
5-13-2301 - Cabinets, Storage, Repair Parts and Tools: Type III, Cabinet Assembly, Class A, and B
5-13-2302 - Type III, Class A, Sliding Tray Assembly
5-13-2303 - Type III, Class A and B, Drawer Assembly, Size “e”
5-13-2304 - Cabinets, Storage, Repair Parts and Tools: Type IV, Cabinet Assembly
5-13-2305 - Type IV, Drawer Compartment Assembly
5-13-2306 - Type IV, Drawer Assembly, Size “f”
5-13-2307 - Type IV, Drawer Assembly, Size “g”
5-13-2308 - Type IV, Drawer Assembly, Size “h”
5-13-2309 - Cabinets, Storage, Repair Parts and Tools: Type V, Cabinet Assembly
5-13-2310 - Type V, Drawer Assembly, Size “j”
5-13-2311 - Type V, Drawer Assembly, Size “k”
5-13-2312 - Cabinets, Storage, Repair Parts and Tools: Type VI, Cabinet Assembly, Expanded Metal

(Copies of these documents are available from U.S. Army Combat Capabilities Development Command Soldier Center 10 General Greene Ave. Natick, MA 01760 or https://devcom.army.mil.)

2.3 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Copies of this document are available from www.asq.org or the American Society for Quality, 611 East Wisconsin Avenue, Milwaukee, WI 53202.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM-A510/A510M - Standard Specification for General Requirements for Wire Rods and Course Round Wire, Carbon Steel, and Alloy Steel
ASTM-A853 - Standard Specification for Steel Wire, Carbon, for General Use
ASTM-A1008/A1008M - Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Required Hardness, Solution Hardened, and Bake Hardenable
ASTM-A1011/A1011M - Standard Specification for Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength
ASTM-D4444 - Standard Test Method for Laboratory Standardization and Calibration of Hand-Held Moisture Meters
ASTM-D4689 - Standard Specification for Adhesive, Casein-Type
ASTM-D4690 - Standard Specification for Urea-Formaldehyde Resin Adhesives
ASTM-F1267 - Standard Specification for Metal, Expanded, Steel

(Copies of this document are available from www.astm.org or the American Society for Testing and Materials, 100 Barr Harbor Drive, W. Conshohocken, PA 19428-2959.)

COMPOSITE PANEL ASSOCIATION (CPA)

CPA ANSI-A135.4 - Basic hardboard
CPA ANSI-A208.1 - Particleboard

(Copies of this document are available from www.compositepanel.org or the Composite Panel Association, 19465 Deerfield Avenue, Suite 306, Leesburg, VA 20176.)

SAE INTERNATIONAL (SAE)

SAE AMS-STD-595 - Colors Used in Government Procurement

(Copies of these documents are available from www.sae.org or SAE International Customer Service, 400 Commonwealth Drive, Warrendale, PA 15096.)

SOCIETY FOR PROTECTIVE COATINGS (SSPC)

SSPC-PAINT 25 - Zinc Oxide, Alkyd, Linseed Oil Primer for Use Over Hand Cleaned Steel Type I and Type II

(Copies of this document are available from https://www.sspc.org)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this specification and the references cited herein, the text of this specification takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3), in accordance with 4.3.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

3.2 Materials. Materials shall conform to applicable specifications, standards, and requirements specified herein and on the applicable drawings. Materials not specifically defined shall be as regularly used by the manufacturer. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.2.1 Steel.

3.2.1.1 Steel, sheet and strip. Sheet and strip steel components shall be fabricated from hot rolled or cold rolled steel conforming to ASTM-A1011/A1011M and ASTM-A1008/A1008M.

3.2.1.2 Wire, steel. Steel wire components shall be fabricated from No.'s 1010, 1015 or 1020 of ASTM-A510/A510M, bare finish, annealed steel wire conforming to ASTM-A853.

3.2.1.3 Metal, expanded, steel. Panels for expanded metal components shall conform to type II, class 2, grade A of ASTM-F1267.

3.2.2 Wood. Wood for the core of composite wood tops shall be low density hardwood or softwood, having a minimum rated weight of 50 pounds per cubic foot conforming to CPA ANSI-A208.1. The moisture content of the wood shall be determined in accordance with ASTM-D4444 at a 10 percent moisture content.

3.2.3 Hardboard. Hardboard for cabinet top veneers shall be a minimum 0.125 inch thick, class 1 tempered, conforming to CPA ANSI-A135.4. The hardboard of types I and V cabinets shall be smooth on two sides. For type IV cabinets, the hardboard shall be smooth on one side.

3.2.4 Particleboard. Particleboard for cabinet tops shall conform to CPA ANSI-A208.1, with the following indicated requirements and applications.

a. Particleboard core - type I, grade 1-M-2

b. Particleboard face and back veneers - type I, grade 1-M-2, 0.375 inch thick, sanded two sides.

3.2.5 Adhesives. Adhesives for bonding cabinet tops shall conform to the following:

3.2.5.1 Adhesive, casein-type. Casein-type adhesive shall conform to class B of ASTM-D4689.

3.2.5.2 Adhesive, urea-resin-type. Urea-resin-type adhesive shall conform to type C of ASTM-D4690.

3.2.5.3 Adhesive, thermosetting vinyl-emulsion type. Thermosetting vinyl-emulsion type adhesive shall meet the block shear strength, tension loading shear strength, both wet and dry, and pH requirements of ASTM-D4690.

3.2.6 Primer. Primer shall conform to SSPC-Paint 25.

3.2.7 Enamel. Enamel shall conform to MIL-DTL-15090 except that the color shall be Green color No. 24084 of SAE AMS-STD-595.

3.2.8 Chain. Chains shall be type II, class 6, weldless, steel, zinc-coated plumber's chain conforming to RR-C-271.

3.3 Design and Construction. The cabinets shall conform to the requirements specified herein and on the applicable drawings referenced in 2.2.2. Details not specifically defined shall be in accordance with the manufacturer's regular practice. Figures 1 through 9 are included herewith for ready identification of the various types and classes of cabinets, and to illustrate the major distinguishing features and overall dimensions applicable to each.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

3.3.1 Welding. Welding, where specified or used as an option, may be used only in fabrication of the original item and shall not be used as a repair measure. All welds shall be accomplished in accordance with commercial practice, and shall be smooth, sound, and free from porosity, burned or reduced areas, fractures, and undercut. Welding scale shall be removed, and rough edges and projections shall be dressed smooth.

3.3.2 Fastening devices. Fastening devices shall be standard commercial items, fabricated from steel, and shall have a zinc or cadmium plated finish. Threaded fasteners shall be installed with lock washers or self-locking nuts to prevent loss of tightness. Fastening devices subject to removal or adjustment shall not be peened, swaged, staked, or otherwise deformed to prevent adjustment or removal. All threaded parts shall be in the inch system and shall comply with FED-STD-H28.

3.3.3 Sheet Metal Components. All like bends of sheet metal components shall be of uniform radius, and unless otherwise specified on the drawings, radii shall be as small as practicable in relation to sheet metal thickness. All exposed sheet metal edges shall be free of sharp edges and burrs.

3.3.4 Riveting. When applicable, holes for rivets shall be of a diameter to insure a snug fit with the rivet shank after setting. When practicable rivet holes shall be drilled or punched at time of assembly. Burrs at rivet holes that may prevent proper seating of rivet heads shall be removed. Setting of rivets shall be accomplished so that mating surfaces are drawn tight. The rivet heads shall be in full contact with mating surfaces, concentric with the rivet shank, and rivet heads shall be free from splits, burrs, and sharp edges.

3.3.5 Base and cabinet sides assembly. The cabinet base shall be assembled to the cabinet sides so that the assembled cabinet is not supported by any sheet metal edges.

3.3.6 Cabinet drawers. The cabinet drawers shall be equipped with stops wherever shown on applicable drawings. The drawer stops shall prevent drawer removal when opened in a normal manner, but shall permit drawers to be intentionally removed. The drawer guides shall be furnished for each drawer in all cabinets. The sides of the cabinets may be used as guides for drawers adjacent to the sides. When the applicable drawings do not specifically define the configuration of the guides, the configuration shall be in accordance with the manufacturer's standard practice. All drawers of one size shall be interchangeable. The drawers shall operate smoothly without binding and shall not have more than 0.250 inch total side clearance between the drawers and drawer guides. The front face of drawers shall be flush with face of shelves within 0.063 inch. Fabrication of drawer ribs and slots shall be shown on applicable drawings, or alternatively, the ribs and slots shall be the manufacturer's current method of fabrication, providing that equal compartmenting and rigidity capabilities as shown on the drawings are maintained.

3.3.7 Doors.

3.3.7.1 Bin doors. Bin doors shall be removable from the cabinets by sliding the open door to the right. Except for the bottom door of type II cabinets, each bin door on types I and II cabinets shall be equipped with two restraining chains specified in 3.2.8, located as shown on the applicable drawings. Restraining chains shall not be required for the bottom door of type II cabinets. The chains shall be of sufficient length to retain the open door in a horizontal plane. The chains shall be attached by bolting, welding, or riveting. The closed doors shall not extend more than 0.125 inch beyond the front edge of the shelf, and shall not recess more than 0.125 inch from the front edge of the shelf.

3.3.7.1.1 Bin door latches. The latching assembly for bin doors shall be fabricated of not less than 0.125 inch thick steel. The fixed portion shall be attached by welding or riveting. The pivoting handle shall be secured to the door by riveting. The attached latch shall have a positive engagement.

3.3.7.2 Full height doors. Full height double doors shall have the right-hand door equipped with a three point latching device, and the left-hand door equipped with a two point latching device. The latching mechanism shall be controlled by handles of the pivoting type. The handles shall be diecast brass, bronze or zinc alloy and shall be nickel or chromium plated. The doors shall be recessed into the cabinet, with the front face of the doors flush with the front edge of the sides, top, and bottom. The door suspension shall permit removal of cabinet trays and drawers when the doors are opened 90 degrees.

3.3.7.3 Hinges. Hinges for bin doors and full height doors shall be fabricated from not less than 0.072 inch thick steel. Bin door hinges shall be a separating type. Hinge pins shall be not less than 0.120 inch



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

diameter steel wire or rod. Hinge leafs shall be attached to the cabinets and doors by spot welding, as shown on applicable drawings, or by means of rivets or spot welds where not otherwise indicated. Unless otherwise shown on the drawings, each hinge leaf shall be attached by not less than three spot welds or two rivets.

3.3.8 Locking bars and guides, staples and pins. The locking bars and guides shall be fabricated of steel strips not less than 0.083 inch thick. The staples and pins shall be fabricated of flat or round steel wire. Chain specified in 3.2.8 shall be riveted to the pin and locking bar or last link interlocked in hole of locking bar. The locking bars shall hold the drawers in a closed position so that the drawer opens not more than 0.125 inch. The guides shall be welded as shown on the applicable drawings or may be attached by riveting.

3.3.9 Tops, composite wood. The finished thickness of the composite wood top for types I and V cabinets shall be 1.750 inches ± 0.063 inch. The top shall consist of core of glued-up wood blocks specified in 3.3.9.1, or particleboard specified in 3.2.4. The core option shall have a face and back veneer of hardboard specified in 3.2.3, or particleboard specified in 3.2.4. The face and back veneers shall be glued to the core using adhesive specified in 3.2.5.1, 3.2.5.2, or 3.2.5.3. The complete top shall be flat with no warpage greater than 0.125 inch, measured along the diagonals. Sides and ends shall be smooth and all edges and corners rounded with 0.016 inch minimum radius.

3.3.9.1 Wood block core. The wood block core shall be constructed of wood specified in 3.2.2, dried to a moisture content of not more than 10 percent at the time of gluing, when tested as specified in 4.3.2.1. The wood blocks and strips shall be free of unsound knots, tight knots over 0.250 inch in diameter, decay, pitch pockets, splits, holes and wrap. The core shall consist of random length blocks not more than 12 inches nor less than 5 inches long and not more than 1.750 inches wide, surfaced on two sides for gluing. Full length strips shall be used on the outer edges. The wood blocks and strips shall be glued into a solid core using adhesive specified in 3.2.5.1, 3.2.5.2, or 3.2.5.3, with the blocks parallel to the width dimension of the top. Blocks shall be closely butted with no opening more than 0.063 inch. After gluing and curing of the glue, the core shall be machined to a smooth uniform thickness for application of the face and back.

3.3.10 Tops, hardboard and steel. Type IV cabinets shall have a hinged top fabricated of steel, with the lifting portion overlaid with hardboard specified in 3.2.3. The hardboard shall be riveted to the top as shown on the applicable drawings. After setting, the rivet heads shall be flush with or below the hardboard top surface. Two chains specified in 3.2.8 shall be located, one near each end of the top. The chains shall be fixed to the underside of the top and to the cabinet sides to retain the open top at approximately 20 degrees beyond the vertical.

3.3.11 Trays. Trays for type III, class A cabinets shall have tray stops provided to prevent the trays from striking the back plate when closed, and to keep the front edges aligned within 0.063 inch of the closed cabinet doors. The trays shall move freely between the tray guides with not more than 0.188 inch total side clearance between the trays and tray guides. Built-in stops shall be provided to prevent tray removal when opened in a normal manner, but shall permit trays to be intentionally removed.

3.3.11.1 Tray pins. Unless otherwise specified (see 6.2), each tray shall be furnished with 30 tray pins conforming to requirements shown on the applicable drawings. The pins shall be installed in 11 front and 11 rear holes, and in 4 holes on each side of the tray. The pins shall be set hard against their shoulders and secured by speed nuts.

3.4 Finish.

3.4.1 Surface preparation. Prior to painting, metal surfaces of the cabinets shall be cleaned and treated in accordance with method I through VI or type III or IV of TT-C-490.

3.4.2 Priming and enameling. Surfaces treated as specified in 3.4.1 shall be coated with primer specified in 3.2.6. Primed surfaces shall then be coated with enamel specified in 3.2.7. The enamel shall be air dried or baked in accordance with the paint manufacturer's directions. The enamel shall level out to produce a smooth, uniform surface without runs, wrinkles, grit, areas of no film and separation of color.

3.5 Assembly. Unless otherwise specified (see 6.2), types II and IV cabinets shall be furnished knocked-down. All other types of cabinets shall be furnished setup. Tools required for assembly shall be limited to regularly available screwdrivers, wrenches, and pliers.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

3.5.1 Assembly instructions. Each knocked-down cabinet shall be furnished with a copy of assembly instructions. The instructions shall describe in a clear, concise manner the procedure to follow in assembly. All component parts, when practicable , shall be legibly marked for identification and cross reference with the assembly instructions. The instructions shall be sealed in a waterproof envelope and secured to a cabinet component.

3.6 Identification marking. Each cabinet shall be marked in accordance with the unit marking requirements of MIL-STD-130.

3.7 Structural rigidity. The cabinets shall be capable of withstanding the vibration test in 4.4.2, while the cabinets are subjected to proof loads not less than indicated in table I, and with the cabinets secured closed by the means provided. During conduct of the test, the doors shall not be open, and loaded drawers and trays shall remain in the fully closed position. After testing, examination shall reveal no permanent deformation, sags, cracks in or around welds, bent bolts, pulled rivets, or distortion of any component. All drawers, trays, doors, hinged components, and sliding trays shall operate normally without evidence of binding or misalignment.

TABLE I. Minimum capacity proof loads of individual drawers, bins, trays, shelves.

| Cabinet types – proof load in lbs. | | | | | | | |
|---|---|---|---|---|---|---|---|
| Drawer size | I | II | IIIA | IIIB | IV | V | VI |
| a | 25 | | | | | | |
| b, c | 50 | | | | | | |
| d | 100 | | | | | | |
| e | | | 25 | 25 | | | |
| f | | | | | 20 | | |
| g, h | | | | | 60 | | |
| j | | | | | | 100 | |
| k | | | | | | 75 | |
| Small bin | 100 | | | 100 | | | |
| Large bin | | | | 300 | | | |
| Shelf | | 100 | | | 30 | | 100 |
| Tray | | | 50 | | | | |
| Total proof load | 1000 | 300 | 1250 | 1350 | 750 | 850 | 300 |

3.8 Workmanship. The end item shall be clean and free of corrosion, burrs, snags, and rough or sharp edges. All functioning components shall operate smoothly without binding. There shall be no loose or misplaced components, and the assembled cabinets shall be in proper alignment. Knocked-down cabinets shall be readily assembled without the need to modify or rework any component. Painted and plated surfaces shall be uniformly coated, dry, free from runs, sags, teardrops, foreign matter, chips, scratches, blisters, flicking and peeling..

4. VERIFICATION

4.1 Classification of inspections. The inspections requirements specified herein are classified as follows:

a. First article inspection (see 4.2).

b. Conformance inspection (see 4.3).



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

4.2 First article inspection. When a first article is required (see 3.1 and 6.2), the cabinet shall be examined for the defects specified in 4.3.3.1 and 4.3.3.2, and shall be tested for the characteristics specified in 4.4.1 and 4.4.2. Any nonconformance shall be cause for rejection of the first article.

4.3 Conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with ASQ Z1.4.

4.3.1 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents.

4.3.2 In-process inspection.

4.3.2.1 Testing for moisture content of wood. The moisture content of wood requirement in 3.3.9.1 shall be determined in accordance with ASTM-D4444 at time of assembly. Three determinations shall be made on each sample unit to the nearest 0.05 percent. The average of the three determinations shall be the moisture content of the sample unit. The lot shall be all the machined components prepared under the same conditions, stored as a group, and offered for inspection at one time. The sample unit shall be one machined component. The inspection level shall be S-1.

4.3.2.2 In-process examination. Examination shall be made during the manufacturing process to determine compliance with the surface preparation and priming requirements in 3.4.1 and 3.4.2. Whenever nonconformance is noted, correction shall be made to the affected items and process. Items which cannot be corrected shall be removed from production.

4.3.3 End item inspection. The lot shall be all cabinets of the same type and class offered for inspection at one time. The sample unit shall be one completely assembled cabinet or, when knocked-down cabinets are required, all of the finished components required to completely assemble one knocked-down cabinet.

4.3.3.1 End item visual examination. The end items shall be examined for the defects listed in table II. The lot size shall be expressed in units of cabinets. The sample unit shall be one complete cabinet. The inspection level shall be II.

4.3.3.2 End item dimensional examination. The end items shall be examined for defects in dimensions, including paint thickness (when primer is omitted). Only those dimensions that can be evaluated without damaging or disassembling the end items shall be examined. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of cabinets. The sample unit shall be one complete cabinet. The inspection level shall be S-2.

4.3.3.3 End item test. When knocked-down cabinets are required, the cabinets shall be assembled and examined as specified in 4.4.1. The inspection level shall be S-2. In addition, when a preproduction sample (first article), is not required (waived), the initial production unit shall be tested in accordance with 4.4.2 (vibration testing) with no evidence of failure. The initial production unit, regardless of type and class (supplied, assembled or unassembled), shall be vibration tested as specified in 4.4.2 when first article testing is waived.

4.4 Methods of inspection.

4.4.1 Assembly of knocked-down cabinets. Knocked-down cabinets shall be assembled in accordance with the assembly instructions (see 3.5.1) to determine compliance with the applicable requirements in 3.5 and 3.8. After assembly, the cabinets shall be examined for the applicable defects listed in table II. The lot size shall be expressed in units of cabinets. The sample size shall be one complete cabinet.

4.4.2 Vibration. The applicable assembled cabinet, proof loaded as specified in 3.7 and table I, shall be fastened to a vibration machine at the base mounting holes, and at the top and at the mounting bracket when applicable, and subjected to simple harmonic motions having an amplitude of 0.063 inch (0.125 inch total excursion) at a frequency of 600 cycles per minute for a total of 36,000 cycles in the direction of the vertical axis. The cabinets shall then be examined for compliance with 3.7. Any nonconformance shall constitute failure to pass this test.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects.

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Finish, metal components | Color not as specified | | 201 |
| | Area of no finish | | 202 |
| | Discoloration or foreign matter imbedded | | 203 |
| | Not adherent, flaky or blistered | | 204 |
| | Indication of rust under finish | 101 | |
| | Not smooth; i.e., sags, runs, drips, lap, wrinkles or orange peel | | 205 |
| Construction and workmanship | Assembly out of square | 102 | |
| | Any part broken, split, fractured, cracked or malformed | 103 | |
| | Any component missing (except fasteners) | 104 | |
| | One bolt, nut, washer or rivet missing | | 206 |
| | More than one bolt, nut, washer or rivet missing | 105 | |
| | Any sharp or protruding edge | 106 | |
| | Any fastening device not secured | | 207 |
| | Bolt or nut peened, swaged or staked | | 208 |
| | Cabinets of the same type and class not identical throughout | 107 | |
| Tops | Not specified construction | 108 | |
| | Not attached as specified | | 209 |
| | Rivets or bolt heads not flush with or below surface of hardboard | | 210 |
| | Type IV top does not open beyond vertical | 109 | |
| Composite wood Tops | Open glue joint in exposed core, or between face or back and core | 110 | |
| | Warp exceeding 1/8 inch | | 211 |
| | Hole, gouge, split or damage to top surface | 111 | |
| | Sides and ends not smooth | | 212 |
| | Edges and corners not rounded with 1/64 inch minimum radius | | 213 |
| Drawers and trays | Cannot be removed | 112 | |
| | Not interchangeable (as applicable) | 113 | |
| | Retaining stops missing (when required) | 114 | |
| | Tray pins not installed (when applicable) | 115 | |
| Doors, bin | Not removable | 116 | |
| | Chain missing | 117 | |
| | Chains do not hold door open at horizontal plane | | 214 |
| Door, full height | Will not close | 118 | |
| | Prevents removal of drawer or tray | 119 | |
| | Not contained within sides, top and bottom when closed | 120 | |
| Locking bars | Do not hold drawers closed within 1/8 inch | | 215 |
| Welds | Not dressed smooth | | 216 |
| | Spot weld missing | 121 | |
| | Not sound (fractured, burned through or reduced) | 122 | |
| | Spot welds not located where specified | | 217 |
| Assembly instruction (when required) | Missing | | 218 |
| | Incomplete, incorrect or illegible | | 219 |
| | Not sealed in a waterproof envelope | | 220 |
| Identification marking | Illegible, incorrect, incomplete, or improperly applied | | 221 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

5. PACKAGING.

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from then managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The storage cabinets are intended to be used in maintenance shops and on shop trucks for storage of spare parts and tools.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of the specification.
b. Type and class required (see 1.2).
c. When a first article is required (see 3.1, 4.2, and 6.3).
d. When types II and VI may be furnished setup (see 3.5).
e. When more or less than 30 pins are required for each tray (see 3.3.11.1).
f. Packaging requirements (see 5.1).

6.3 First article. When a first article is required, it should be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection and approval of the first article.

6.4 Subject term (key word) listing.

Drawers
Toolbox
Tool storage
Workbench

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - GL
Navy - MC
Air Force - 35
DLA - CQ

Preparing activity:
DLA - CQ


(Project 7125-2025-002)

Review activities:
Army - CE

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

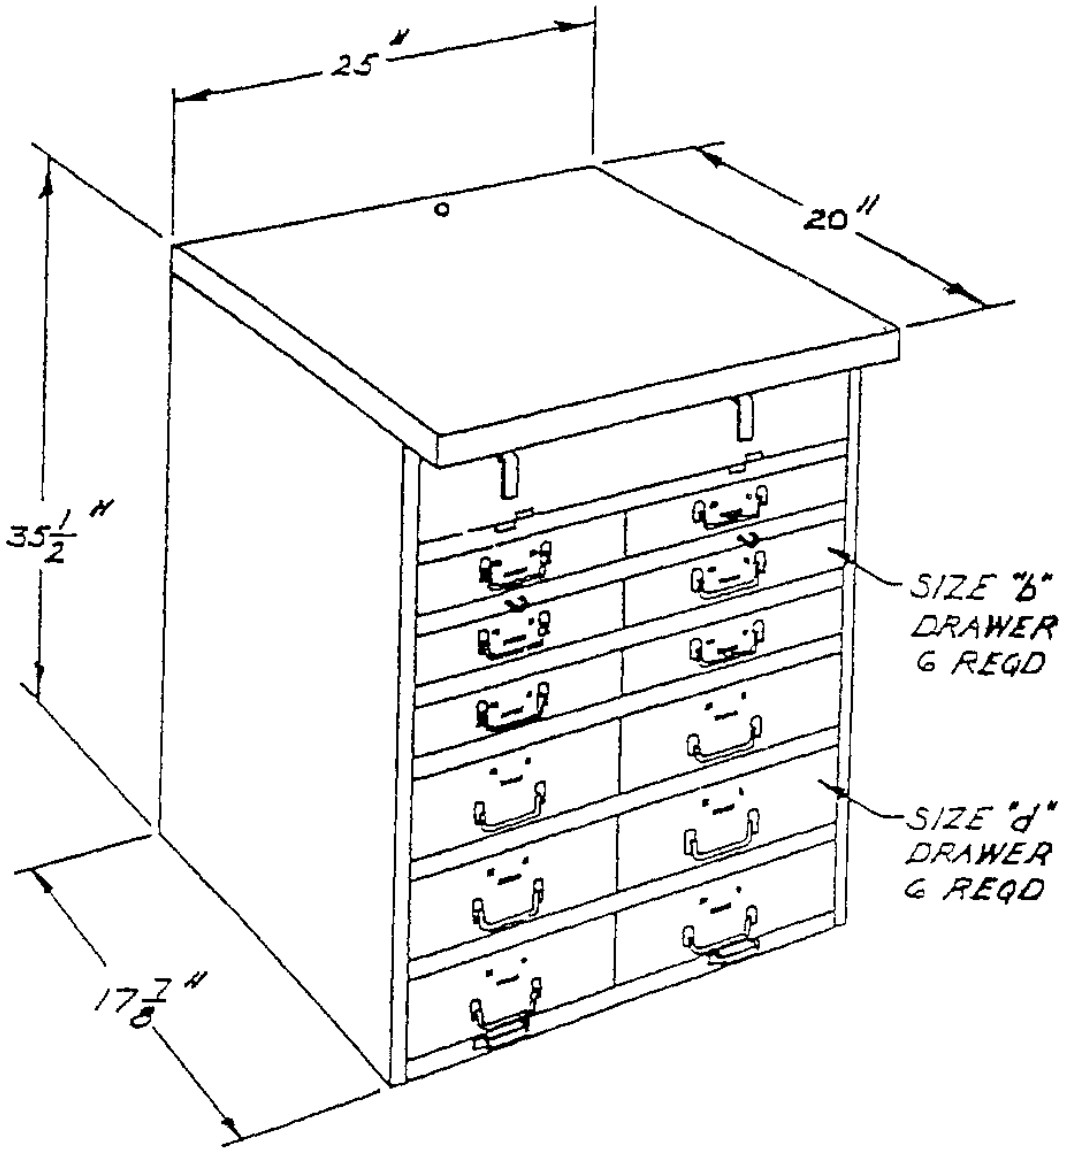



NOTES:
1. LOCKING BARS NOT SHOWN.
2. ALL DIMENSIONS ARE REFERENCE.

FIGURE 1. TYPE-I, CLASS-A



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

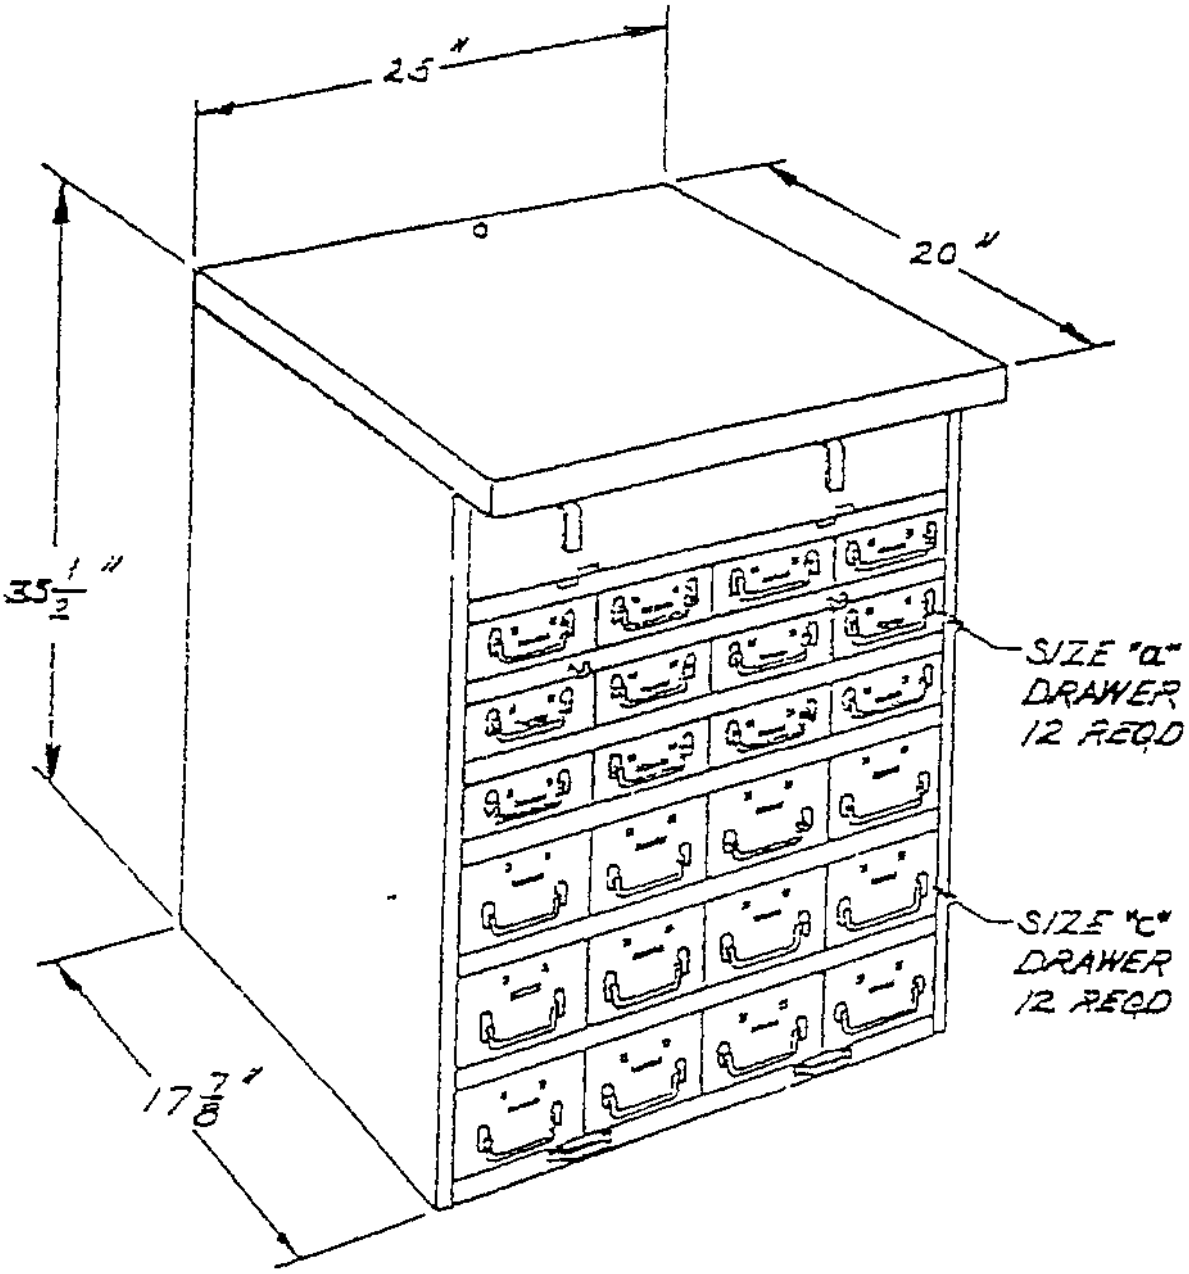



NOTES:

1. LOCKING BARS NOT SHOWN.
2. ALL DIMENSIONS ARE REFERENCE.

FIGURE 2. TYPE-I, CLASS-B



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

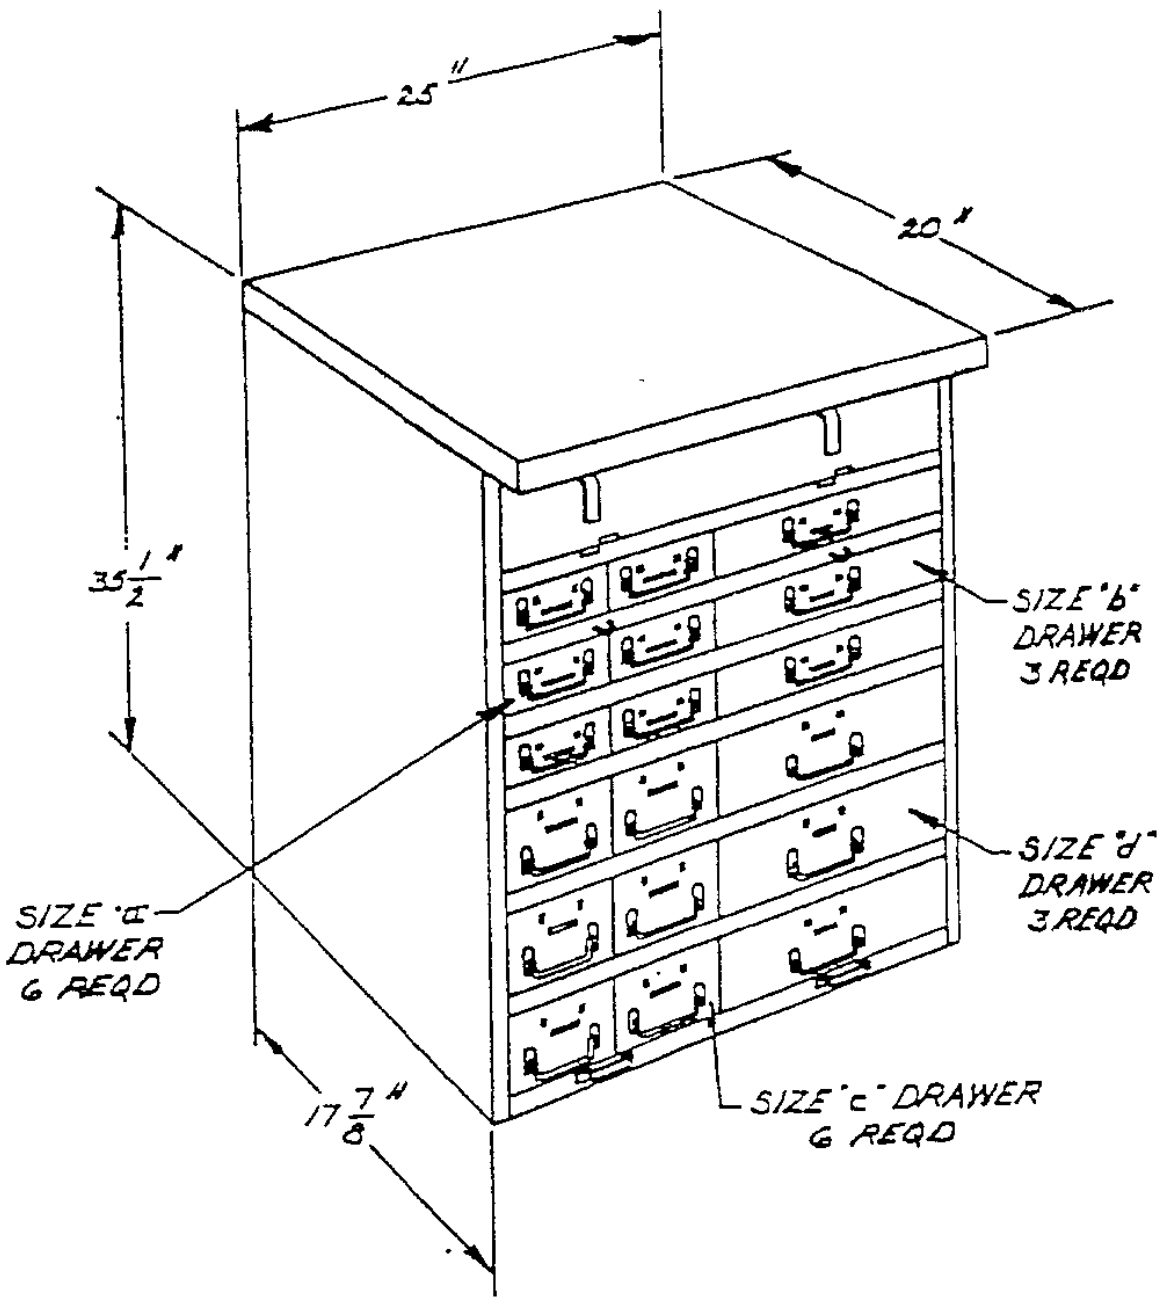



NOTES:
1. LOCKING BARS NOT SHOWN.
2. ALL DIMENSIONS ARE REFERENCE.

FIGURE 3. TYPE-I, CLASS-C



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

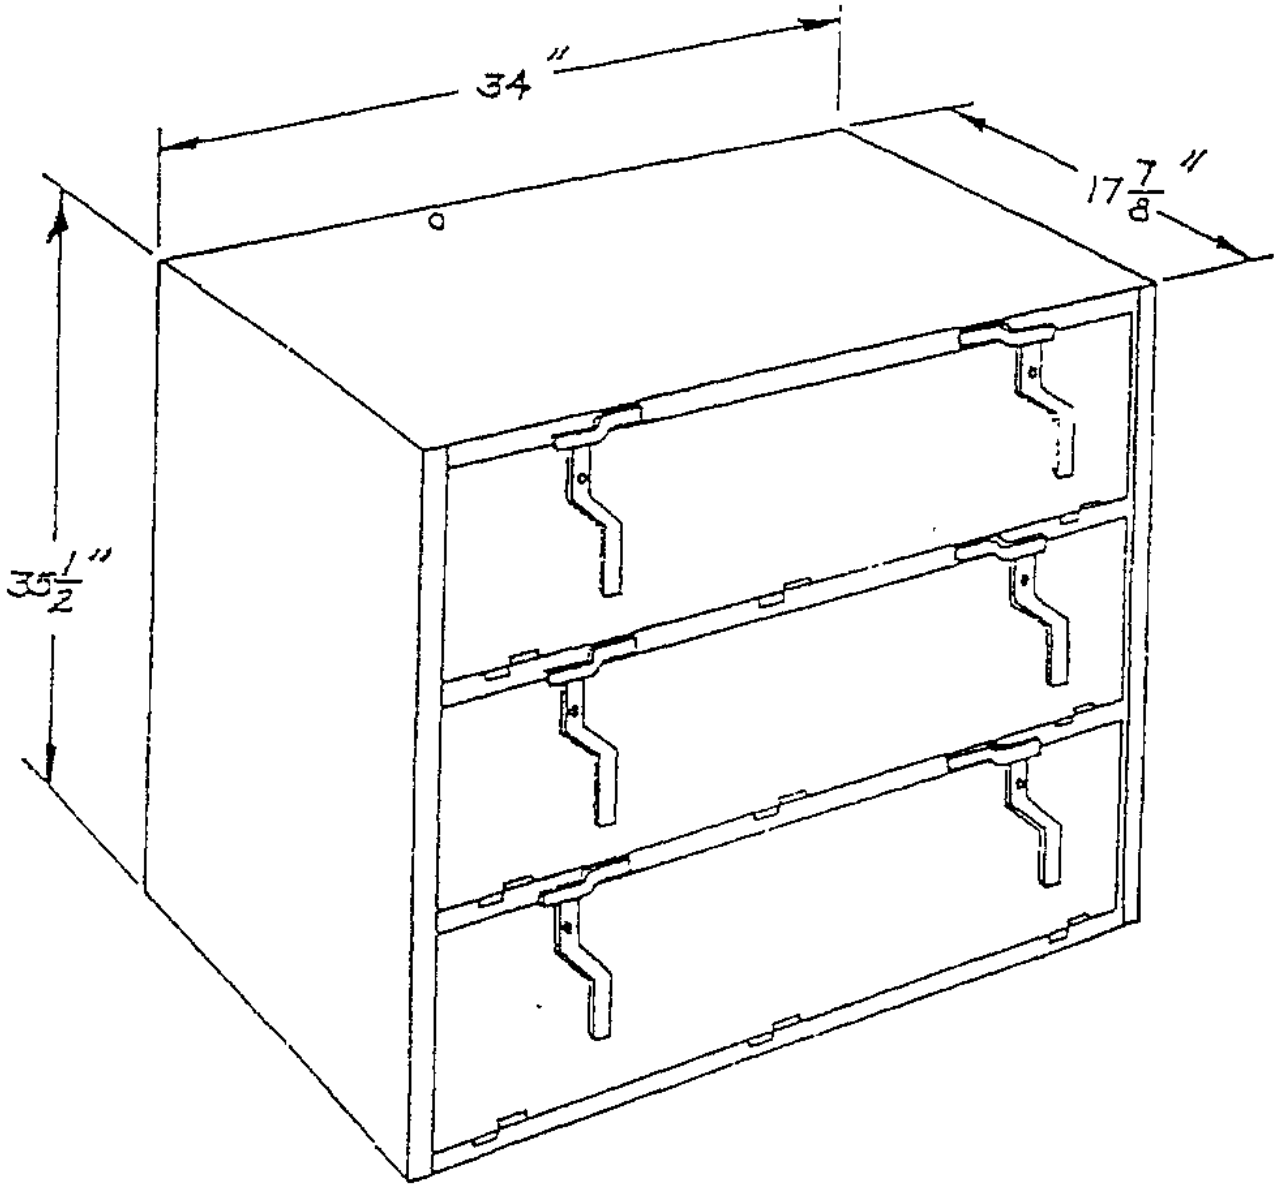



NOTE:
ALL DIMENSIONS ARE REFERENCE.

FIGURE 4. TYPE II



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

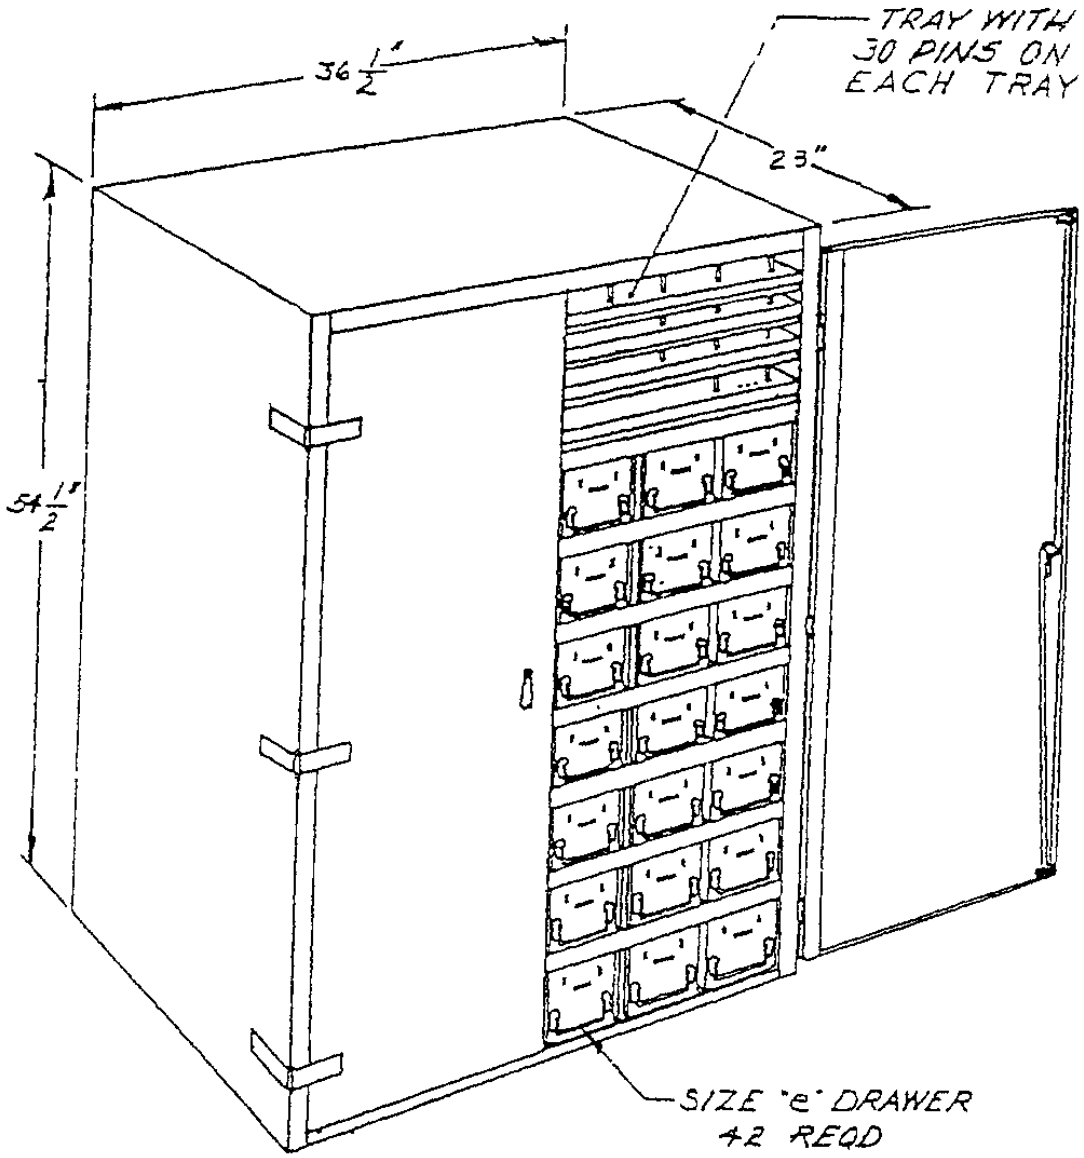



NOTE:
ALL DIMENSIONS ARE REFERENCE.

FIGURE 5. TYPE III, CLASS A



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

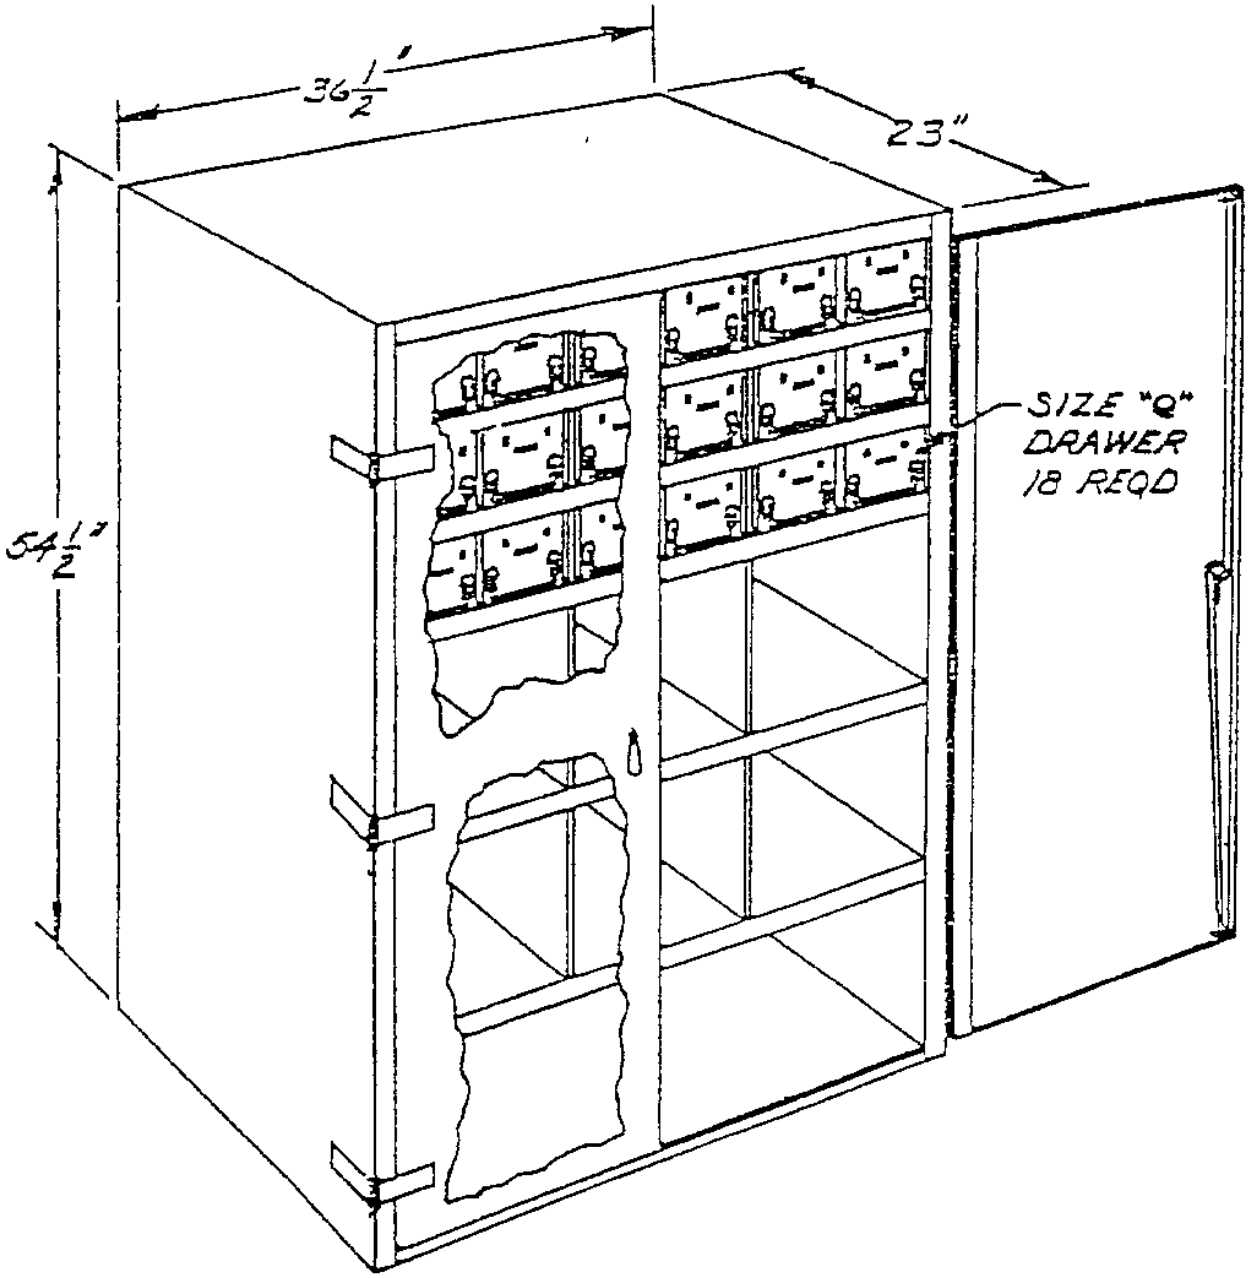



NOTE:
ALL DIMENSIONS ARE REFERENCE.

FIGURE 6. TYPE III, CLASS B



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

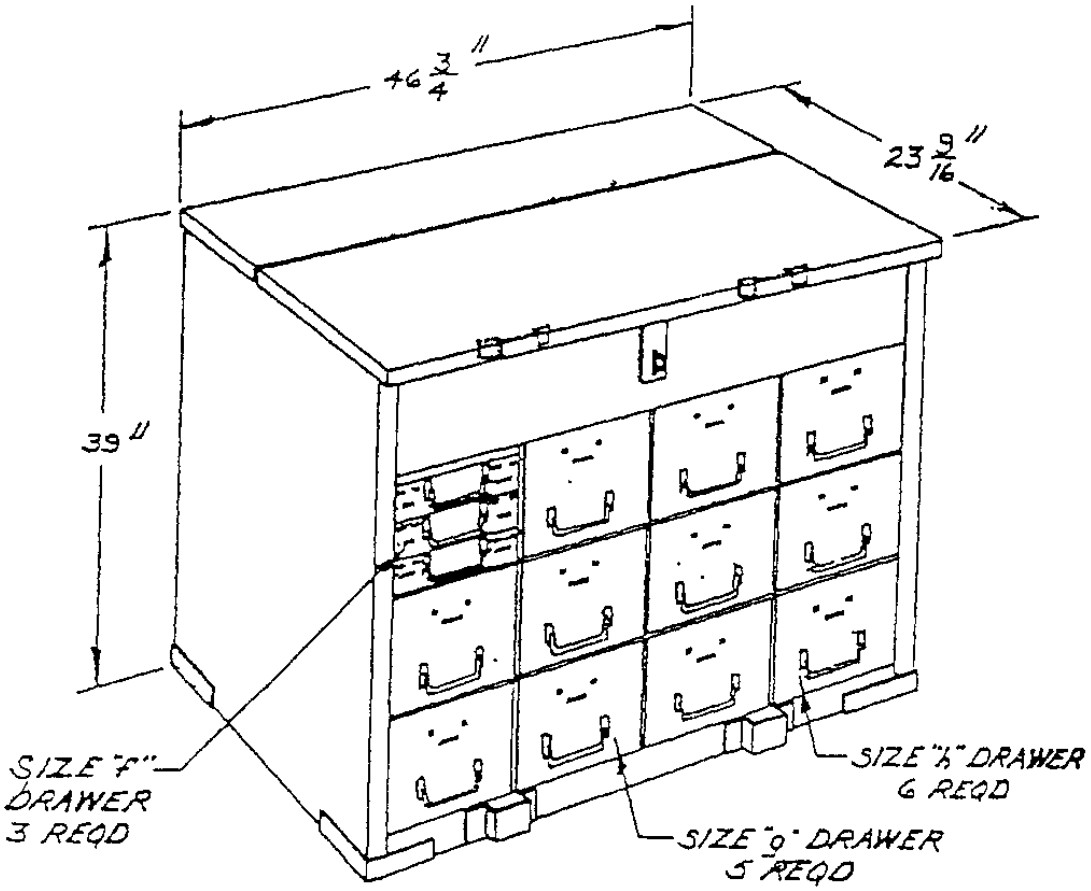



NOTES:
1. LOCKING BARS NOT SHOWN.
2. ALL DIMENSIONS ARE REFERENCE.

FIGURE 7. TYPE IV



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

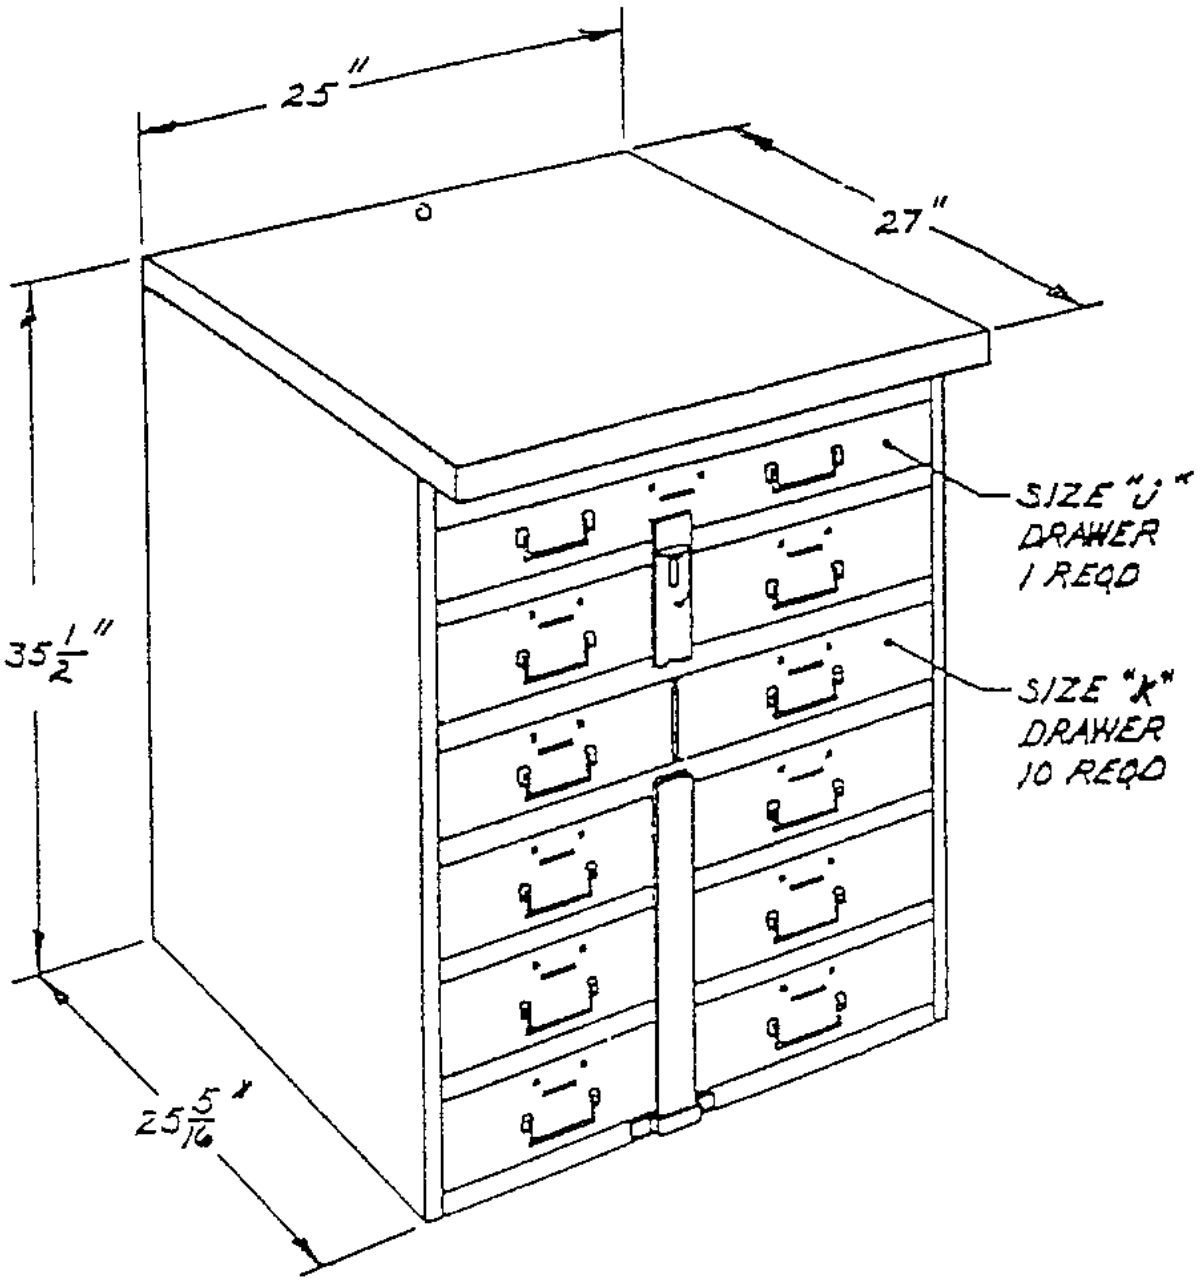



NOTE:
ALL DIMENSIONS ARE REFERENCE.

FIGURE 8. TYPE V



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.

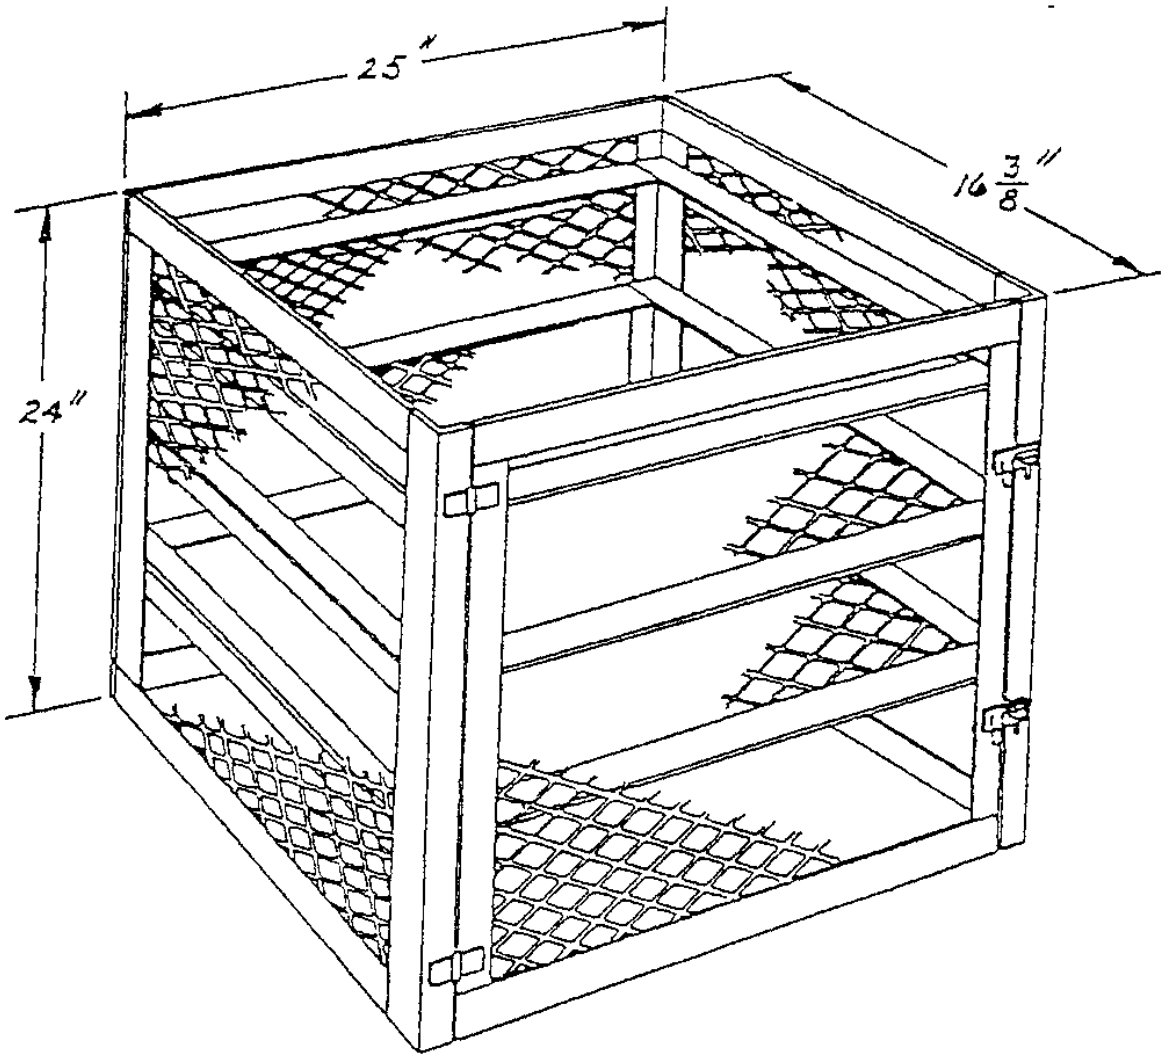


NOTE:
ALL DIMENSIONS ARE REFERENCE.

FIGURE 9. TYPE VI



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:00Z
Check the source to verify that this is the current version before use.