NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-39035/3C
31 January 1994
SUPERSEDING
MIL-R-39035/38
17 March 1978

PERFORMANCE SPECIFICATION


RESISTORS, VARIABLE, NONWIRE-WOUND (ADJUSTMENT TYPE, LEAD-SCREW ACTUATED), ESTABLISHED RELIABILITY STYLE RJR26

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for style RJR26, established reliability, adjustment type, lead-screw actuated, nonwire-wound, variable resistors. This style is available in characteristic F and H.

1.2 Part or Identifying Number (PIN). Resistors covered by this specification shall be identified by a PIN which shall consist of a basis style of this specification and a coded number. The PIN shall be in the following form:

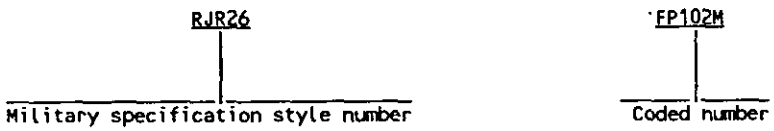

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this documents to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issues of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

MILITARY

MIL-R-39035 - Resistors, Variable, Nonwire-wound (Adjustment Type), Established Reliability, General Specification for.

(Unless otherwise indicated, copies of the federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robins Avenue, Philadelphia, PA 19111-5094.)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5905
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:58Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated detail specifications. The individual item requirements shall be in accordance with MIL-R-39035, and as specified herein.

3.2 Design and construction. The resistors shall be design, construction, and physical dimensions specified on figure 1.

3.3 Power rating. The power rating shall be 1/4 watt for characteristics F and H.

3.4 Terminals. Characteristics F and H are available in P-, W-, and X- type terminals.

3.5 Nominal resistance value and maximum rated ac or dc working voltage. Nominal resistance values and maximum rated ac or dc working voltages shall be as specified in table I.

3.6 Actual effective electrical travel. Actual effective electrical travel shall be 10 turns minimum, and 25 turns maximum.


3.7 Operating torque. Operating torque shall be a maximum of 3 ounces-inches.

3.8 Maximum voltage. Maximum rated ac or dc working voltage shall be 200 volts.


TABLE I. Nominal resistance value and maximum rated ac or dc working voltage.

Nominal resistance value	Maximum rated ac or dc working voltage per characteristics
	F and H
Ohms	
10	1.58
20	2.23
50	3.54
100	5.0
200	7.07
500	11.1
1,000	15.8
2,000	22.3
5,000	35.4
10,000	50.0
20,000	70.7
25,000	79.0
50,000	111
Megohms	
0.10	158
0.20	200
0.25	200
0.50	200
1.00	200

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:58Z
Check the source to verify that this is the current version before use.

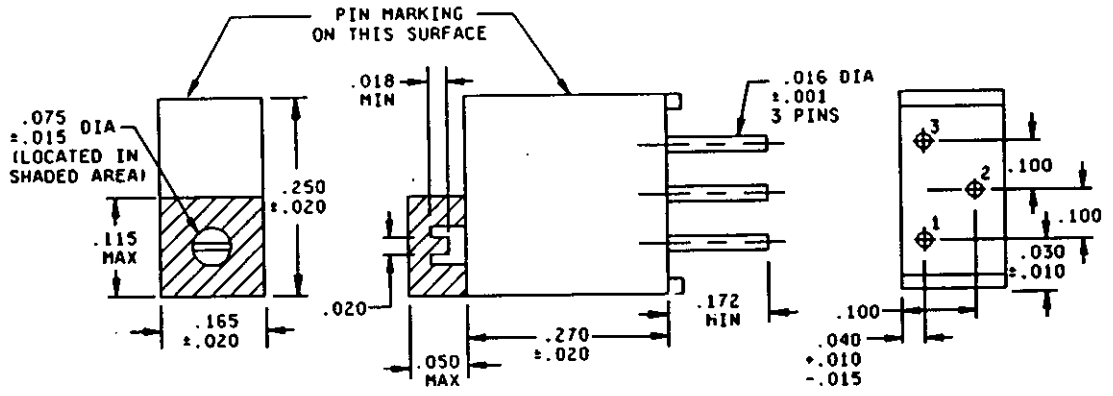


TERMINAL TYPE A

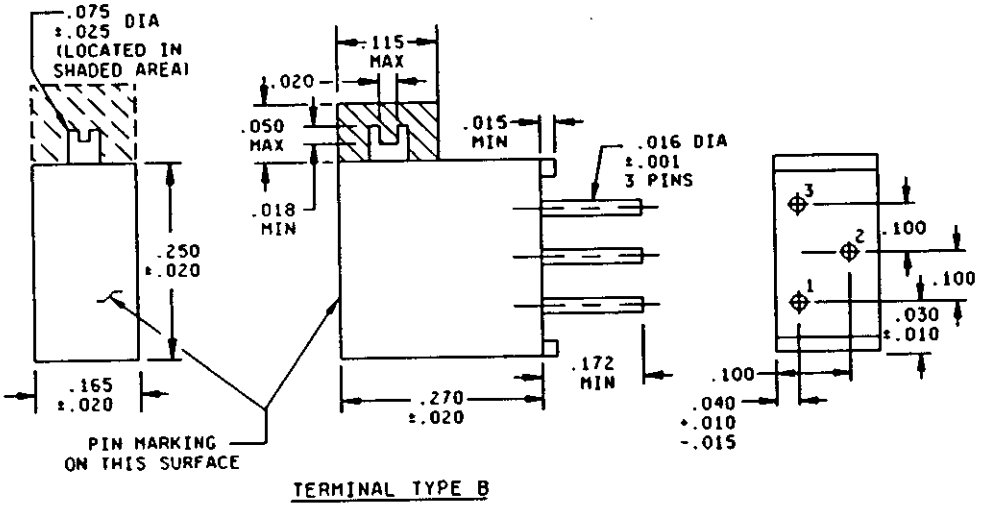


TERMINAL TYPE B

FIGURE 1. Style RJR26 (standoff) resistors

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:58Z
Check the source to verify that this is the current version before use.

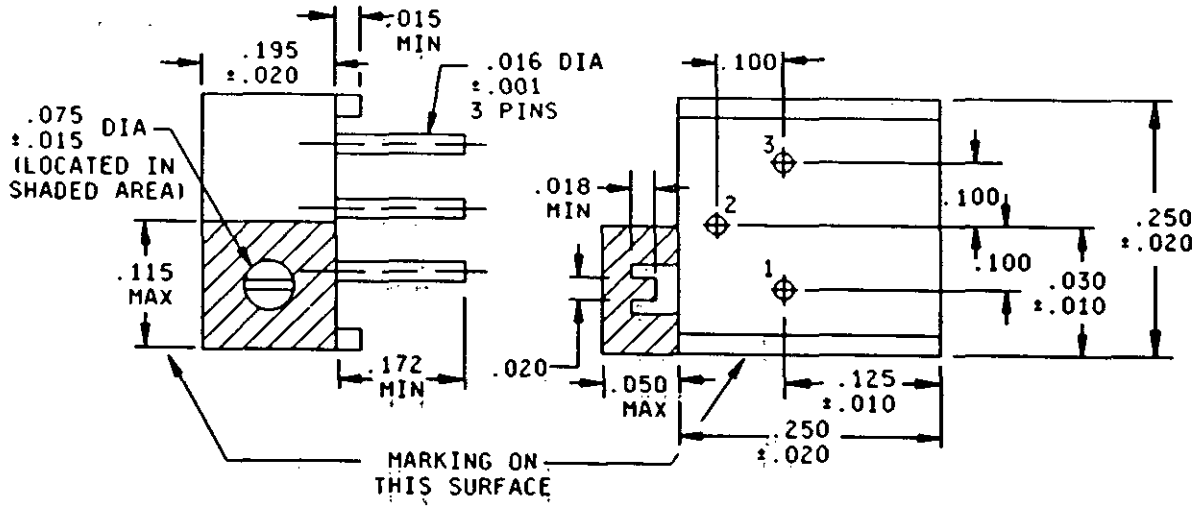

TERMINAL TYPE C

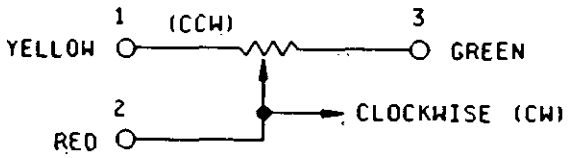


SCHEMETIC DIAGRAM

Inches	mm	Inches	mm
.001	0.03	.075	1.90
.005	0.13	.100	2.54
.010	0.25	.115	2.92
.015	0.38	.125	3.18
.018	0.46	.165	4.19
.020	0.51	.172	4.37
.030	0.76	.195	4.95
.040	1.02	.250	6.35
.050	1.27	.270	6.86


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances is .005 (0.13 mm).
4. The entire slot of the actuating screw must be above the surface of the unit.
5. The head of the lead screw actuator shall not extend beyond any edge of the surface upon which it is mounted.
6. Mounting means are by use of pins only.
7. Standoff shape and location is optional.

FIGURE 1. Style RJR26 (standoff) resistors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:58Z
Check the source to verify that this is the current version before use.

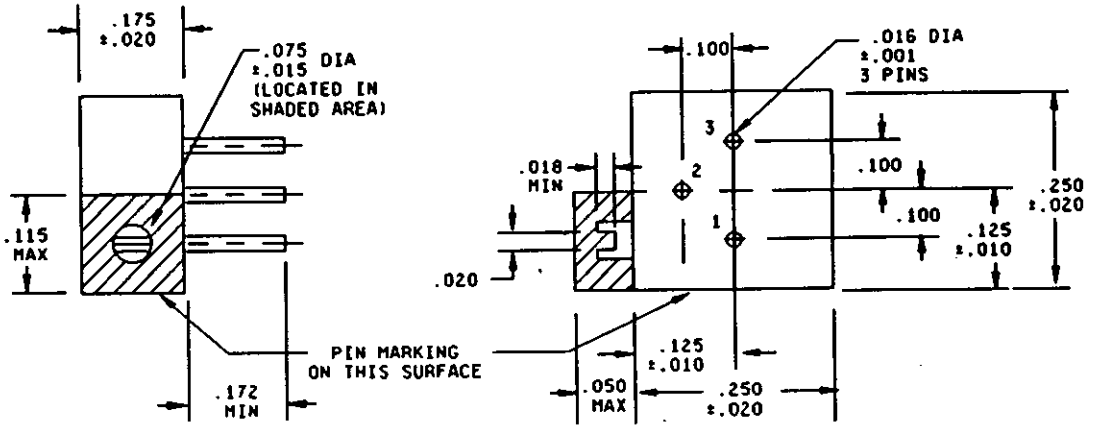


TERMINAL TYPE P

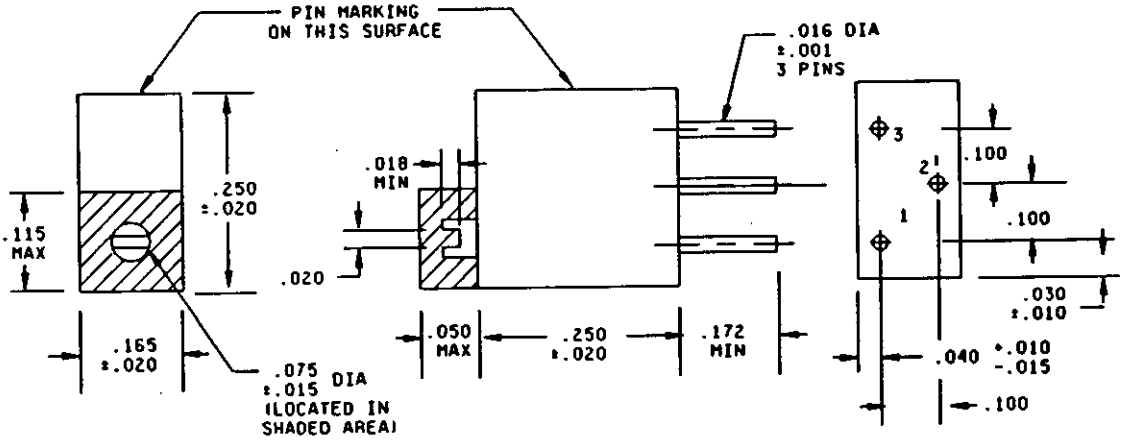

TERMINAL TYPE W


FIGURE 2. Style RJR26 resistors

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:58Z
Check the source to verify that this is the current version before use.

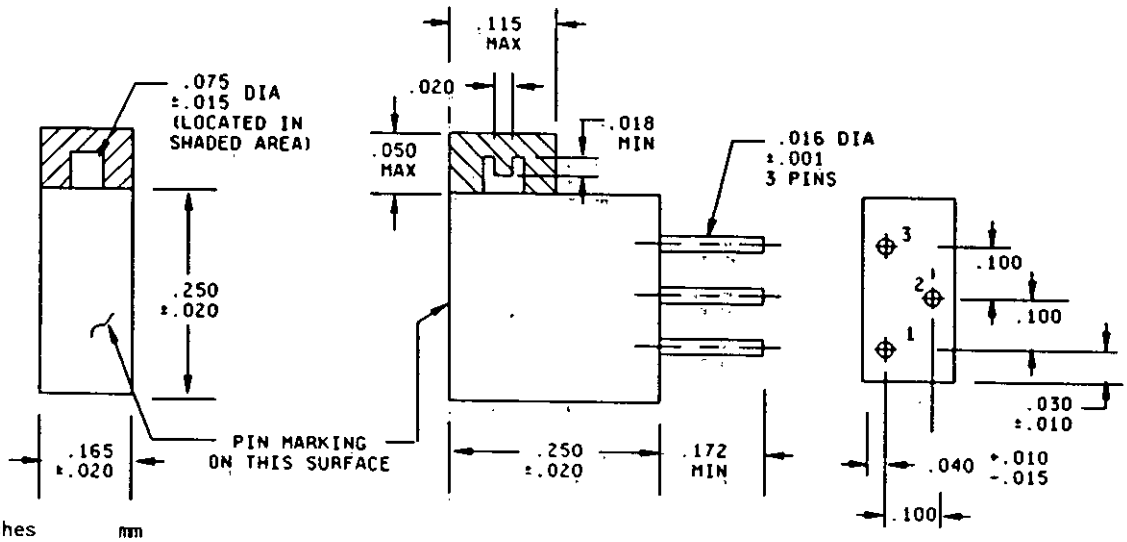

TERMINAL TYPE X

Inches	mm
.001	0.03
.010	0.25
.015	0.38
.016	0.41
.018	0.46
.020	0.51
.030	0.76
.040	1.02
.050	1.27
.075	1.90
.100	2.54
.115	2.92
.125	3.18
.165	4.19
.172	4.37
.175	4.44
.250	6.35

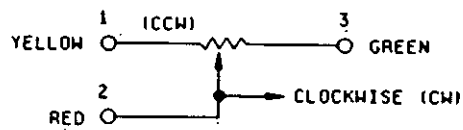

SCHMETIC DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
3. Metric equivalents are given for general information only.
4. The entire slot of the actuating screw must be above the surface of the unit.
5. The head of the lead screw actuator shall not extend beyond any edge of the surface upon which it is mounted.
6. Mounting means are by use of pins only.

FIGURE 2. Style RJR26 resistors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:58Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-R-39035, and as specified herein.

4.2 Dielectric withstanding voltage. In the dielectric withstanding voltage test, the applied potential shall be 600 volts rms at atmospheric pressure, and 250 volts rms at reduced barometric pressure.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-R-39032.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but not mandatory.)

6.1 Intended use. The notes specified in MIL-R-39035 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).

6.3 Weight. The weight is .021 ounces (0.6 grams).

6.4 MIL-R-22097 substitution data. Resistors of this specification regardless of their failure rate designation are substitutes for resistors of the same resistance value, tolerance, terminal characteristic and resistance temperature characteristics specified in the inactivated specifications MIL-R-22097/5.

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - AR, AT, AV, ME, MI
Navy - AS, EC, MC, OS
Air Force - 17, 19, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5905-1366)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-R-39035/3C	2. DOCUMENT DATE (YYMMDD)

3. DOCUMENT TITLE
RESISTORS, VARIABLE, NOWIRE-WOUND (ADJUSTMENT TYPE, LEAD-SCREW ACTUATED), ESTABLISHED RELIABILITY STYLE RJR26

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME 645 LOG/LGMEP	b. TELEPHONE (Include Area Code) (1) Commercial: 513-296-6696 (2) AUTOVON: 986-6696
c. ADDRESS (Include Zip Code) Gentile Station 1060 Hamilton Street Dayton, OH 45444-5400	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:58Z
Check the source to verify that this is the current version before use.