NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-39035/3C
AMENDMENT 1
4 August 1994

PERFORMANCE SPECIFICATION

RESISTORS, VARIABLE, NONWIRE-WOUND
(ADJUSTMENT TYPE, LEAD-SCREW ACTUATED),
ESTABLISHED RELIABILITY,
STYLE RJR26

This amendment forms a part of MIL-R-39035/3C, dated 31 January 1994, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

3.4, delete and substitute:

"3.4 Terminals. Characteristics F and H are available in A-, B-, C-, P-, W-, and X- type terminals."

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Page replaced
3	3
4	4

PAGE 5

FIGURE 2: Delete pin diameter ".016 ±.001" and substitute ".017 ±.002" (two places).

PAGE 6

FIGURE 2: Delete pin diameter ".016 ±.001" and substitute ".017 ±.002".

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force- 85

Review activities:
Army - AR, AT, AV, ME, MI
Navy - AS, CG, MC, OS
Air Force - 17, 19, 99
DLA - ES


Preparing activity:
Air Force - 85

Agent:
DLA - ES


(Project 5905-1385)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:58Z
Check the source to verify that this is the current version before use.

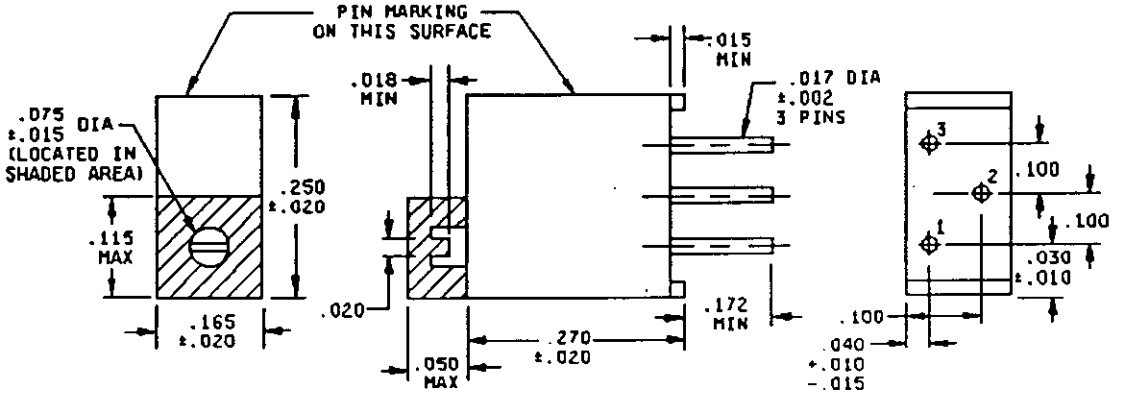


TERMINAL TYPE A

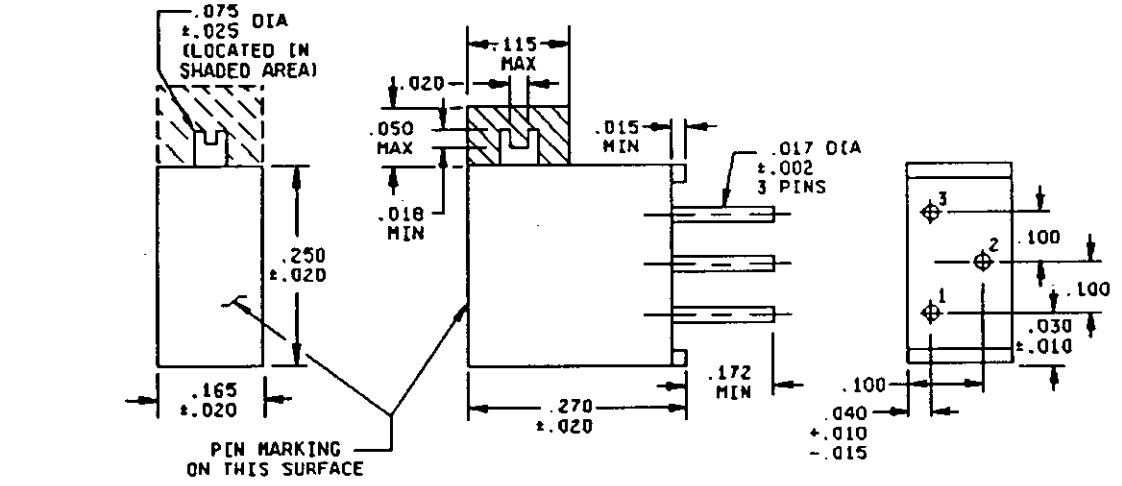


TERMINAL TYPE B

FIGURE 1. Style RJR26 (standoff) resistors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:58Z
Check the source to verify that this is the current version before use.

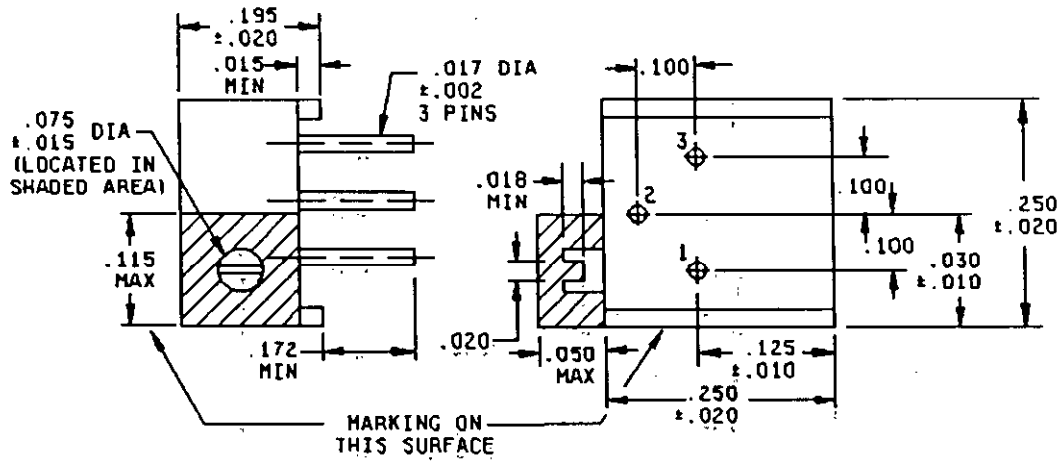

TERMINAL TYPE C

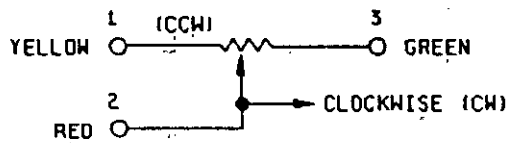

SCHEMETIC DIAGRAM

Inches	mm	Inches	mm
.001	0.03	.075	1.90
.005	0.13	.100	2.54
.010	0.25	.115	2.92
.015	0.38	.125	3.18
.018	0.46	.165	4.19
.020	0.51	.172	4.37
.030	0.76	.195	4.95
.040	1.02	.250	6.35
.050	1.27	.270	6.86

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances is .005 (0.13 mm).
4. The entire slot of the actuating screw must be above the surface of the unit.
5. The head of the lead screw actuator shall not extend beyond any edge of the surface upon which it is mounted.
6. Mounting means are by use of pins only.
7. Standoff shape and location is optional.

FIGURE 1. Style RJR26 (standoff) resistors - Continued.

Source: https://assist.dla.mil -- Downloaded: 20260-21T18:58Z
Check the source to verify that this is the current version before use.