[INCH-POUND]

MIL-R-39035/5B
30 Sep 1990
SUPERSEDING
MIL-R-39035/5A
1 March 1973

MILITARY SPECIFICATION SHEET

RESISTORS, VARIABLE, NONWIRE-WOUND (ADJUSTMENT TYPE, LEAD-SCREW ACTUATED), ESTABLISHED RELIABILITY STYLE RJR28

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-R-39035.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for style RJR28, established reliability, adjustment type, lead-screw actuated, nonwire-wound, variable resistors. This style is available in characteristics C and F.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issue of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

MILITARY

MIL-R-39035 - Resistors, Variable, Nonwire-Wound (Adjustment Type), Established Reliability, General Specification For.

(Unless otherwise indicated, copies of the federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be address to: Electronic Support Division AFLC, 2750 ABW/ES, Gentile AF Station, Dayton, OH 45444-4500 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5905

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:59Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-R-39035, and as specified herein.

3.2 Design and construction. Resistors shall be of the design, construction, and physical dimensions specified on figure 1.

3.3 Power rating. The power rating shall be 0.3 watt for characteristics C and F.

3.4 Nominal resistance value and maximum rated ac or dc working voltage. Nominal resistance values and maximum rated ac or dc working voltages are as specified in table I.

3.5 Actual effective electrical travel. Actual effective electrical travel shall be 5 turns, minimum, and 15 turns, maximum.

3.6 Operating torque. Operating torque shall be 2 ounce-inches maximum.


3.7 Terminal. Characteristics C and F are available in P-type terminal.

3.8 Maximum voltage. Maximum rated ac or dc working voltage shall be 300 volts.

TABLE I. Nominal resistance value and maximum rated ac or dc working voltage.

Nominal resistance value	Maximum rated ac or dc working voltage per characteristic
	C and F
Ohms	Volts
10	1.73
20	2.45
50	3.88
100	5.48
200	7.75
500	12.2
1,000	17.3
2,000	24.3
5,000	38.8
10,000	54.8
20,000	77.5
25,000	86.6
50,000	122.6
Megohms	
0.10	173
0.20	245
0.25	274
0.50	300
0.75	300
1.00	300
2.00	300

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:59Z
Check the source to verify that this is the current version before use.

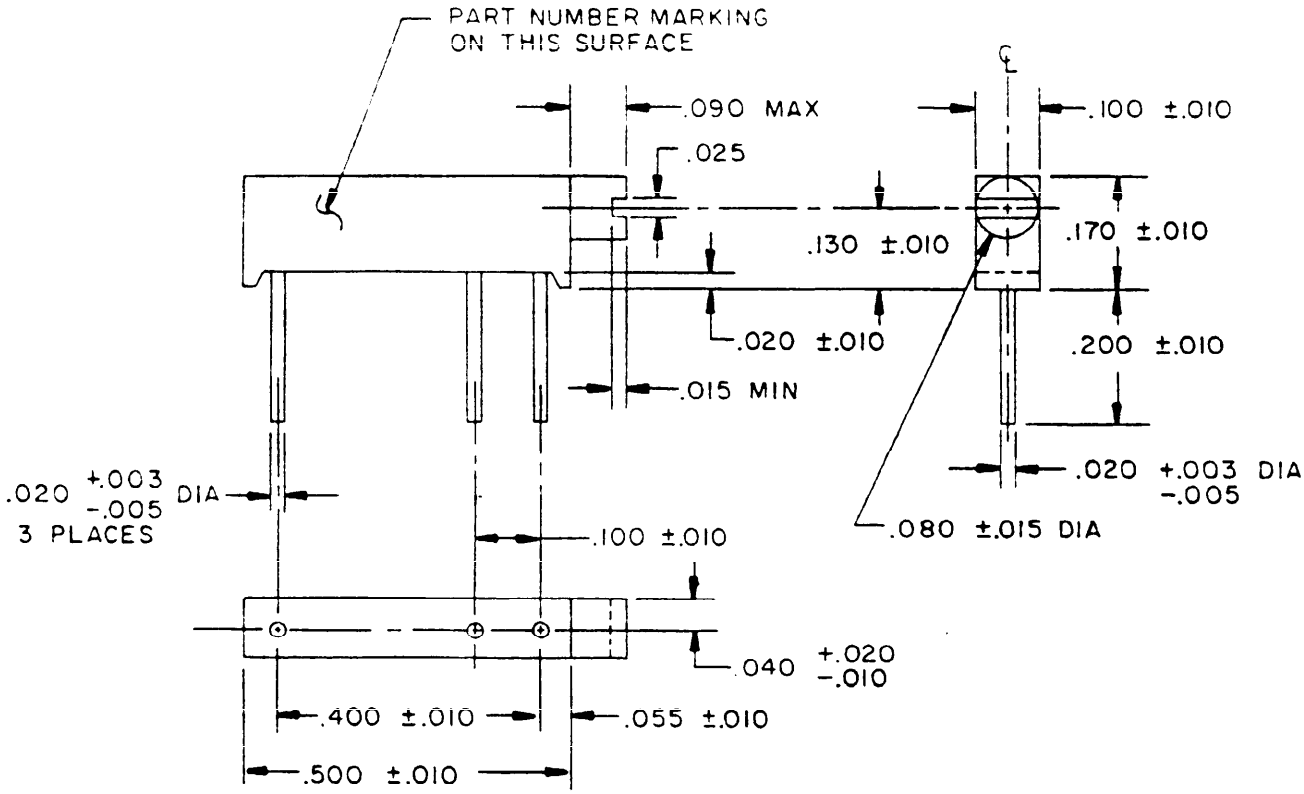

Inches	mm	Inches	mm
.003	0.08	.080	2.03
.005	0.13	.090	2.29
.010	0.25	.100	2.54
.015	0.38	.130	3.30
.020	0.51	.170	4.32
.025	0.64	.200	5.08
.040	1.02	.400	10.16
.055	1.40	.500	12.70

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. The picturization of the style above is given as representative of the envelope of the item, slight deviation from the outline shown which are contained in the envelope and do not alter the functional aspects of the device are acceptable.

TERMINAL TYPE P

FIGURE 1. Style RJR28 resistors.

Source: https://assist.dla.mil -- Downloaded: 202610-21T18:59Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-R-39035, and as specified herein.

4.2 Dielectric withstanding voltage. In the dielectric withstanding voltage test, the applied potential shall be 900 volts rms at atmospheric pressure and 350 volts rms at reduced barometric pressure.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-R-39035.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-R-39035 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

6.3 Weight. The maximum weight is 0.43 gram.

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 17, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC
Air Force - 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5905-1221)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-R-39035/5B	2. DOCUMENT DATE (YYMMDD)

3. DOCUMENT TITLE RESISTORS, VARIABLE, NONWIRE-WOUND (ADJUSTMENT TYPE, LEAD-SCREW ACTURATE), ESTABLISHED RELIABILITY STYLE RJR28

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON
c. ADDRESS *(Include Zip Code)*	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-290

Source: https://assist.dla.mil -- Downloaded: 20240-21118:59Z
Check the source to verify that this is the current version before use.