FED. SUP CLASS
4730

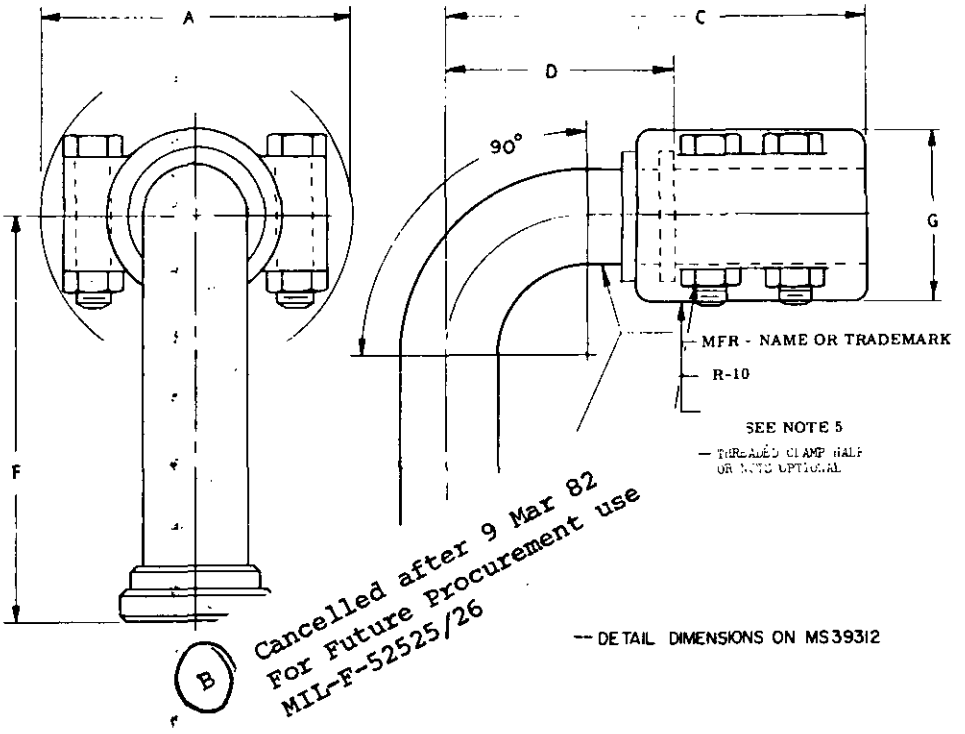

Cancelled after 9 Mar 82
For Future Procurement use
MIL-F-52525/26

REVIEW ACTIVITY: AV

USER ACTIVITY: MU, 82

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

APPROVED 26 AUGUST 1966 REVISED (A) 22 DECEMBER 1970 (B) 9 March 1982

TABLE I.
DIMENSIONS FOR "C" COUPLINGS

DASH NO.	HOSE I.D. REF.	A MAX	B MIN	C MAX	D MAX	F' ±.062	G MAX
-16	1	4.69	0.81	6.06	3.06	7.20	2.50
-20	1-1/4	4.96	1.00	6.18	3.61	7.94	3.38
-24	1-1/2	5.50	1.25	6.75	4.11	9.01	3.69
-32	2	6.68	1.68	9.57	6.19	11.25	4.44

TABLE II.
MAXIMUM WORKING PRESSURES OF "C" COUPLINGS

HOSE I.D. (REF)	"C" PSI
1	4,000
1-1/4	3,000
1-1/2	2,500
2	2,500

(A) ENTIRE STANDARD REVISED

P.A. ARMY-ME Other Cust	TITLE COUPLING, HOSE: FIELD ATTACHABLE (REUSEABLE), HYDRAULIC, PRESSURE TYPE, CLAMP-ON, 4-BOLT SPLIT-FLANGE, 90° BENT TUBE, LONG DROP, FOR R-10 4-SPIRAL WRAP HOSE.	MILITARY STANDARD MS39289
PROCUREMENT SPECIFICATION MIL-C-52525	SUPERSEDES:	SHEET 1 OF 2

DD FORM SEP 87 672-1 (Duplicate)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:50Z
Check the source to verify that this is the current version before use.