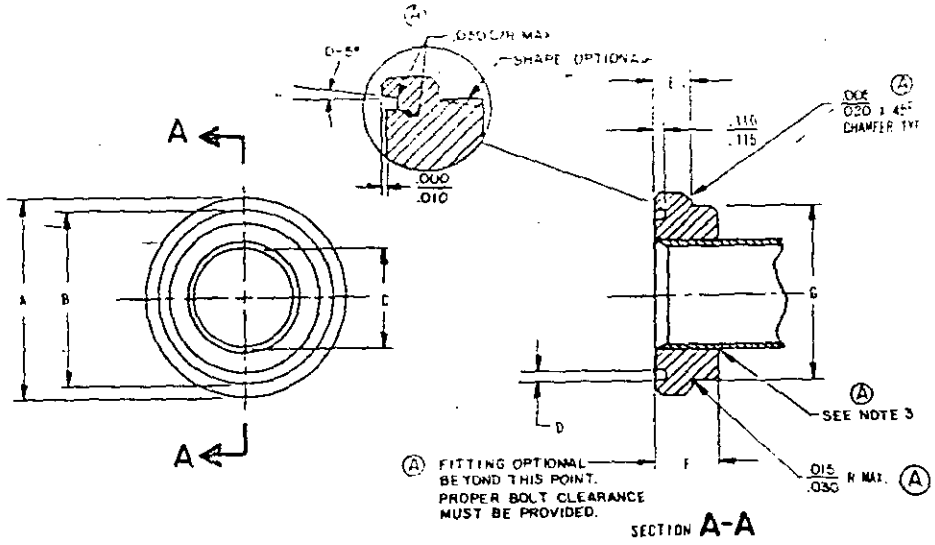

FLANGE DIMENSION FOR 0 TO 3,000 PSI WORKING PRESSURE

DASH NO. REF	NOMINAL FLANGE SIZE	A ±.010	B	C* MIN	D	E	F MIN	G MAX
-16	1.000	1.750	1.565 / 1.560	.750	.175 / .155	.320 / .310	.56	1.50
-20	1.250	2.000	1.755 / 1.750	1.000	.175 / .155	.320 / .310	.56	1.70
-24	1.500	2.375	2.125 / 2.115	1.250	.175 / .155	.320 / .310	.62	1.98
-32	2.000	2.812	2.500 / 2.490	1.687	.175 / .155	.380 / .370	.62	2.45
**-40	2.500	3.312	3.005 / 2.995	2.187	.175 / .155	.380 / .370	.66	2.92
***-48	3.000	4.000	3.625 / 3.615	2.625	.175 / .155	.380 / .370	.75	3.55
							Ⓐ	Ⓐ

* MINIMUM BORE DIAMETER
** 2500 PSI WORKING PRESSURE, MAX.
*** 2000 PSI WORKING PRESSURE, MAX.

NOTES:

1. ...

Ⓑ Cancelled after 19 October 1981
For future procurement use
SAE J518

...LAR
...UBLE.

...AND SHALL NOT BE USED AS A PART

REVIEW ACTIVITIES:

USER ACTIVITIES: MU, WC, SH, 82

Ⓑ 19 October 1981

REVISED Ⓐ 27 DECEMBER 1976

APPROVED 3 March 1967

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND PRODUCTION APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. Army-ME Other Cust	TITLE FLANGE-HEAD; HYDRAULIC, 4-BOLT SPLIT-FLANGE TYPE HOSE CONNECTION, 0 TO 2,000; 2,500 AND 3,000 PSI	MILITARY STANDARD MS 39312
PROCUREMENT SPECIFICATION NO.:	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971 -433-695/4099

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:51Z
Check the source to verify that this is the current version before use.