REVIEW ACTIVITIES:
USER ACTIVITIES: MU, WY, 11, 82

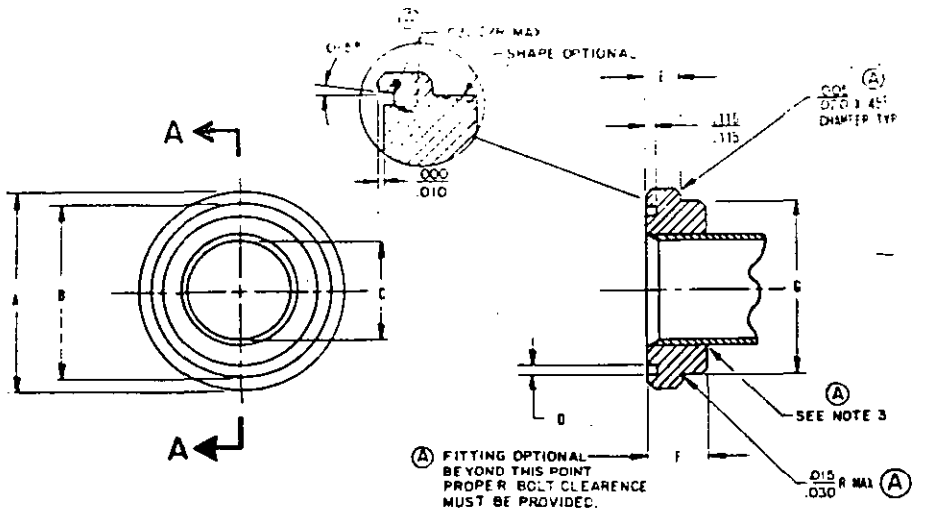

SECTION A-A

FLANGE DIMENSIONS FOR 3,000 TO 6,000 PSI WORKING PRESSURE

DASH NO. REF	NOMINAL FLANGE SIZE	A ±.010	B	C* MIN.	D	E	F MIN.	G MAX.
-16	1.000	1.87						
-20	1.250	2.12						
-24	1.500	2.50						
-32	2.000	3.12						

* MINIMUM BORE DIAMETER

NOTES:

1. ALL DIMENSIONS IN INCHES.
2. ALL SEALING SURFACES SHALL BE SMOOTH EXCEPT ANNULAR TOOL MARKS UP TO [illegible] MAX. WILL BE ALLOWED.

(A)

(B) Cancelled after 19 October 1981
For future procurement use
SAE J518

USED

APPROVED 3 March 1967 REVISED (A) 29 DECEMBER 1970 (B) 19 October 1981

P A ARMY - ME Cmcr Cust	TITLE FLANGE-HEAD; HYDRAULIC, 4-BOLT SPLIT-FLANGE TYPE HOSE CONNECTION 3,000 TO 6,000 PSI	MILITARY STANDARD MS 39313
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 505-022/8444

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.