FED. SUP CLASS
4720

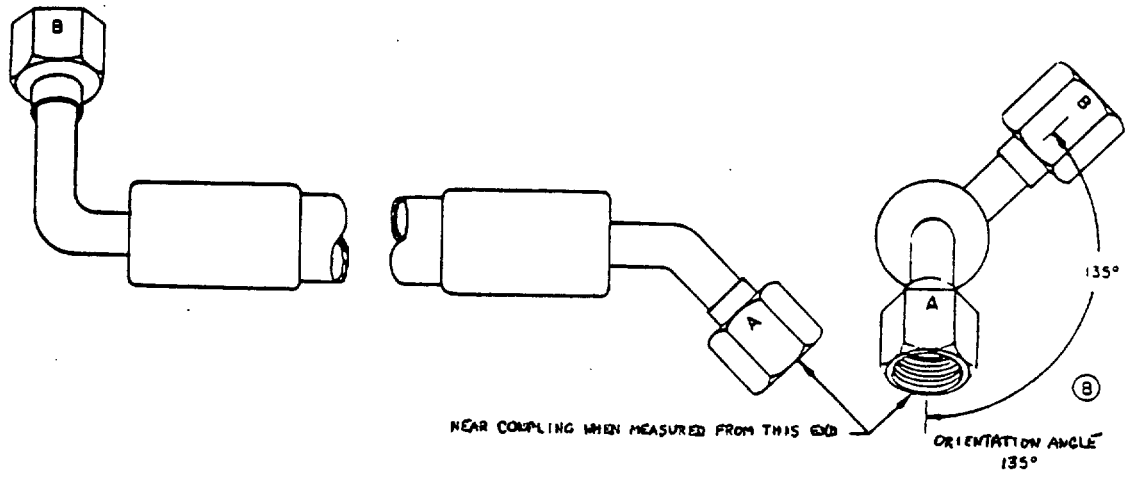

NOTES:

1. THE NEAR COUPLING SHALL BE THE REFERENCE POINT WHEN MEASURING THE ORIENTATION ANGLE OF THE COUPLINGS.
2. EITHER COUPLING MAY BE DESIGNATED AS THE NEAR COUPLING.
3. THE COUPLING ORIENTATION ANGLE SHALL BE MEASURED IN DEGREES, COUNTERCLOCKWISE FROM THE NEAR COUPLING.
4. ORIENTATION ANGLE TOLERANCE SHALL BE PLUS OR MINUS 2 DEGREES ON LENGTHS UP TO AND INCLUDING TWO FEET AND PLUS OR MINUS 3 DEGREES ON LENGTHS OVER TWO FEET. (B)

THIS IS A DESIGN FEATURE STANDARD AND SHALL NOT BE USED AS A PART NUMBER

APPROVED 3 MARCH 1967 REVISED (A) 29 DECEMBER 1970 (B) 14 SEPTEMBER 1984

REVIEW ACTIVITIES: AL, CS
USER ACTIVITIES: MC, 82

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE, USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. ARMY -ME Other Cust	TITLE HOSE ASSEMBLY: MEASUREMENT OF COUPLING ORIENTATION ANGLE	MILITARY STANDARD MS 39320
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM SEP 87 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT NO. 4720-0642

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:57:51
Check the source to verify that this is the current version before use.