FED. SUP CLASS
3820

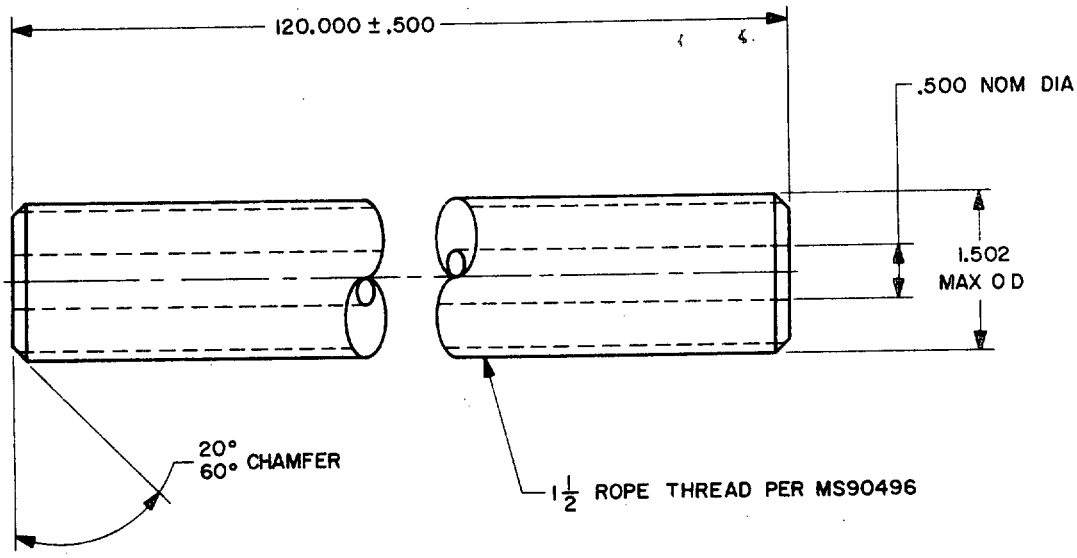

NOTES:

1. ROD SHALL BE THREADED A MINIMUM OF 24 INCHES ON BOTH ENDS.
2. ENDS SHALL BE SQUARE WITH THREAD WITHIN .005 INCH.
3. THREAD SHALL BE TURNED AT 90° TO CENTERLINE OF PIECE WITHIN .005 INCHES.
4. FULL LENGTH OF ROD SHALL BE CARBURIZED INSIDE AND OUTSIDE.
5. LUBRICATION METHOD OPTIONAL.
6. ALL DIMENSIONS IN INCHES.
7. FOR DESIGN FEATURE PURPOSE THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

USER ACTIVITIES: MC

APPROVED 6 November 1968 REVISED

This Military Standard is mandatory for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-ME Other Cust NAVY-YD AIR FORCE-84	TITLE DRILL ROD SECTION, ROCK DRILL FOR DRIFTER DRILLS	MILITARY STANDARD MS39329
PROCUREMENT SPECIFICATION MIL-D-22233	SUPERSEDES: MS 39244	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.