FED. SUP CLASS
4730

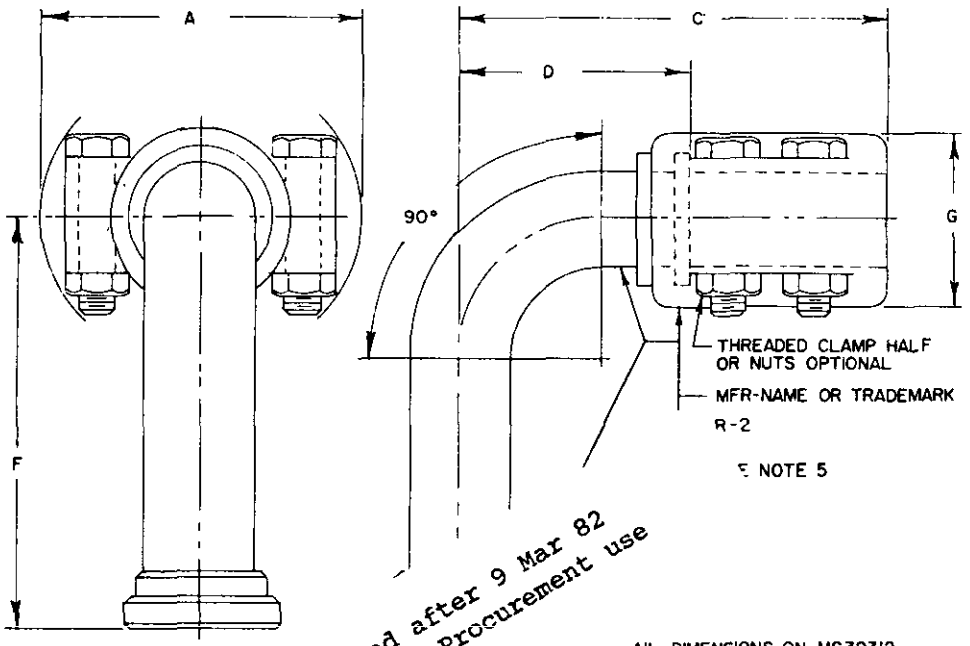

Cancelled after 9 Mar 82
For Future Procurement use
MIL-F-52525/30

.AIL DIMENSIONS ON MS39312

(A)

ABLE I

.IMENSIONS FOR "B" COUPLINGS

	.D. REF.	A MAX	B MIN	C MAX	D MAX	F ±.062	G MAX
-16	1	3.60	0.78	4.90	2.89	6.10	2.06
-20	1-1/4	4.50	1.01	6.00	3.61	7.94	3.25
-24	1-1/2	5.00	1.25	6.90	4.11	9.01	3.44
-32	2	5.88	1.72	8.90	6.19	11.25	4.19

TABLE II

MAXIMUM WORKING PRESSURES OF "B" COUPLINGS

HOSE I.D. (REF)	"B" PSI
1	2,000
1-1/4	1,625
1-1/2	1,250
2	1,125

REVIEW ACTIVITIES:
USER ACTIVITIES MU, MC, SH, 82

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

APPROVED 23 DECEMBER 1970 (A) 9 March 1982

P.A. ARMY-ME Other Cust	TITLE COUPLING, HOSE; FIELD ATTACHABLE (REUSEABLE), HYDRAULIC, PRESSURE TYPE, CLAMP-ON, 4-BOLT SPLIT-FLANGE, 90° BENT TUBE, LONG DROP DOUBLE WIRE BRAID HOSE.	MILITARY STANDARD MS 39340.
PROCUREMENT SPECIFICATIONS: MIL-C-52525	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:52Z
Check the source to verify that this is the current version before use.