FED. SUP CLASS
4730

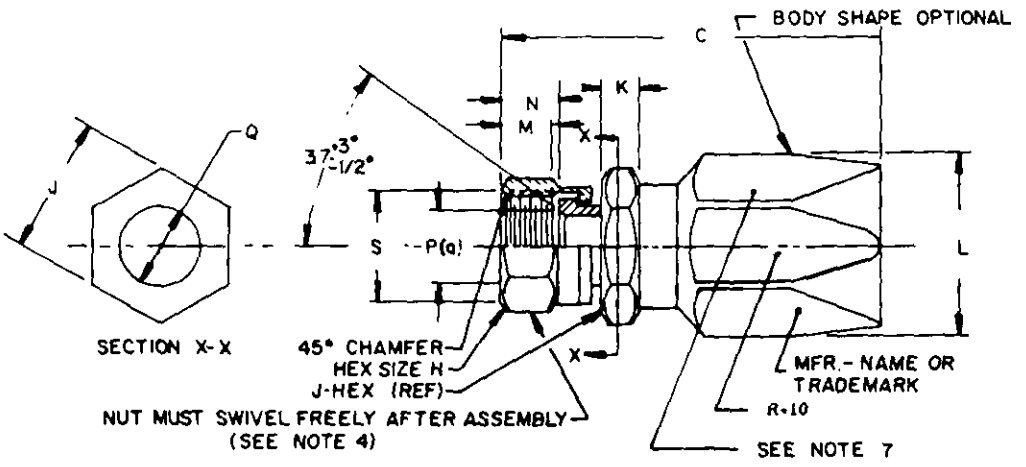

(a) DIMENSION P TO BE CONCENTRIC WITH DIMENSION Q WITHIN 0.01 5 FULL INDICATOR READING.

TABLE I
DIMENSIONS FOR "C" COUPLING

TUBE DASH NO.	HOSE DASH NO.	HOSE I.D. (REF)	NOMINAL THREAD SIZE	H	K	L MAX	M MIN	N +.016 -.000	P +.005 -.000	Q MIN	C MAX	S MIN	J MIN
-12	-12	3 4	1-1 16-12	1.250	0.50	2.20	0.469	0.562	0 850	0.600	5.82	1.078	1.25

(A) CANCELLED AFTER 25 OCTOBER 1978 for future procurement use MIL-F-52525/9

TABLE II
WORKING PRESSURE OF "C" COUPLING

HOSE I. D. REF	3 4
PRESSURE	5, 000

TABLE III
OVER-TIGHTENING TORQUE FOR SWIVEL NUT

DASH NO.	NOM TUBE O. D. REF	TORQUE
-12	3 4	850 INCH POUNDS

REVISE AUTHORITIES
USER AUTHORITIES NOW, AC, SA, 62

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

APPROVED 21 DECEMBER 1970 (A) 25 October 1978

P.A. ARMY-ME Other Cust	TITLE COUPLING, HOSE; FIELD ATTACHABLE (REUSEABLE), HYDRAULIC, SCREW-ON, PRESSURE TYPE, FEMALE, SWIVEL, 37° FLARE, STRAIGHT, FOUR SPIRAL WRAP HOSE.	MILITARY STANDARD MS 39342
PROCUREMENT SPECIFICATIONS MIL-C-52525 (ME)	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1

Source: https://assist.dla.mil -- Downloaded: 20261O-23T17:52Z
Check the source to verify that this is the current version before use.

U.S. GOVERNMENT PRINTING OFFICE: 1978—603-022/5309