FED. SUP CLASS
4730

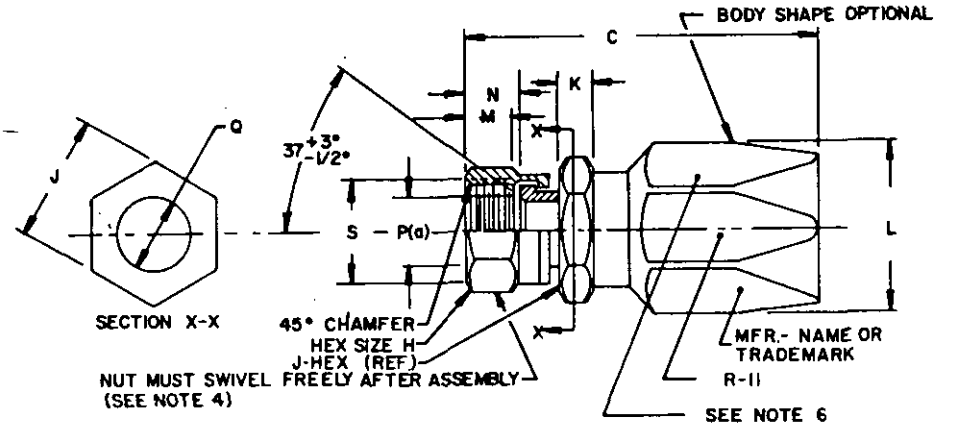

(a) DIMENSION P TO BE CONCENTRIC WITH DIMENSION Q WITHIN 0.015 FULL INDICATOR READING

TABLE I

DIMENSIONS FOR "D" COUPLINGS

TUBE DASH NO.	HOSE DASH NO.	HOSE I.D. (REF)	NOMINAL THREAD SIZE	H	K MIN	L MAX	M MIN	N +.016 -.000	P +.005 -.000	Q MIN	C MAX	S MIN	J MIN
-12	-12	3/4	1-1/16-12	1.250	0.50	2.35	0.469	0.562	0.850		96	1.078	1.25

MAXIMUM

A CANCELED AFTER 6 AUGUST 1981

0.250

TABLE III

OVER-TIGHTENING TORQUE FOR SWIVEL NUT

DASH NO.	NOM TUBE/O.D. REF	TORQUE
-12	3/4	850 INCH POUNDS

REVIEW ACTIVITIES:
USER ACTIVITIES MU, WC, SH, 82

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

APPROVED 23 DECEMBER 1970 A 6 August 1981

P.A. ARMY- ME Other Cust	TITLE COUPLING, HOSE; FIELD ATTACHABLE (REUSEABLE), HYDRAULIC, SCREW-ON, PRESSURE TYPE, FEMALE, SWIVEL, 37° FLARE, STRAIGHT, SIX SPIRAL WRAP HOSE.	MILITARY STANDARD MS 39343
PROCUREMENT SPECIFICATIONS MIL-C-52525	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Cancelled)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/6140

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:52Z
Check the source to verify that this is the current version before use.