FED. SUP CLASS
4730

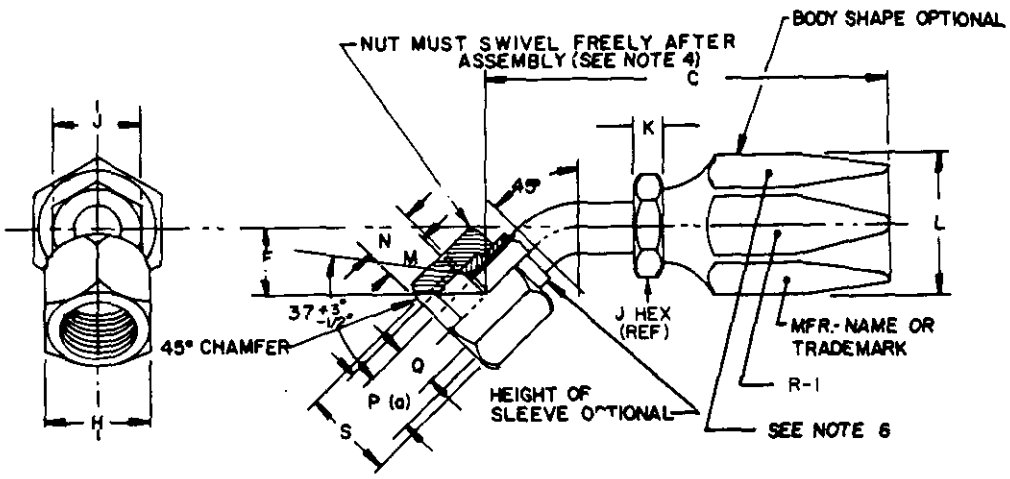

(a) DIMENSION P TO BE CONCENTRIC WIT[illegible] .015 F.I.R.

TABLE I.

TUBE DASH NO.	HOSE DASH NO.	HOSE I.D. (REF	N	P	Q	C	S	F	J
			MIN	+.030 -.000	+.005 -.000	MIN	MAX	MIN	MAX	MIN
-5	-4	1	.7	.331	.375	.156	2.97	3.19	.50	.42	.43
-6	-6		1.09	.333	.375	.260	3.33	3.32	.56	.45	.50
-8			.31	1.20	.375	.422	.380	3.85	3.90	.75	.61	.62
-10			.50	.31	1.20	.461	.500	.380	4.12	4.33	.87	.69	.75
			1.250	.38	1.59	.469	.562	.600	4.53	4.91	1.06	.85	.87

(A) CANCELLED AFTER 25 OCTOBER 1978
For future procurement use
MIL-F-52525/6

APPROVED 21 DECEMBER 1970 (A) 25 OCTOBER 1978

USER ACTIVITIES MU, WC, SH, 82

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE, SHALL BE MADE FROM THIS DOCUMENT.

P.A. ARMY- ME Other Cust	TITLE COUPLING, HOSE; FIELD ATTACHABLE (REUSEABLE), HYDRAULIC, SCREW-ON, PRESSURE TYPE, FEMALE, SWIVEL, 37° FLARE, 45° BENT TUBE, SINGLE WIRE BRAID HOSE.	MILITARY STANDARD MS 39344
PROCUREMENT SPECIFICATIONS MIL-C-52525	SUPERSEDES:	SHEET 1 OF 3

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1978—603-022/5310

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:52Z
Check the source to verify that this is the current version before use.