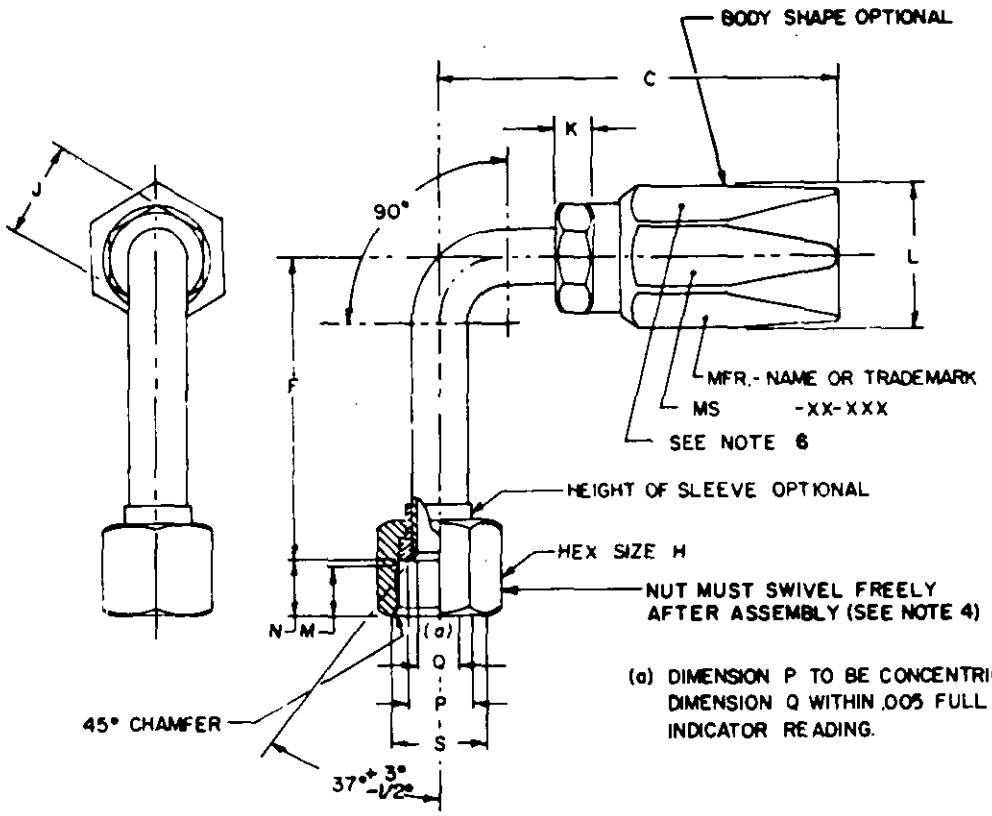

TABLE I. DIMENSIONS FOR FITTINGS

TUBE DASH NO.	HOSE DASH NO.	HOSE I.D. (REF)	NOM SIZE & THD IN	H	K MIN	L MAX	.030 +.000 -.000	P +.005 -.000	Q MIN	C MAX	S MIN	F ± 0.06	J MIN
-5	-4	1/4	1/2-20	.625	.19		.375	.355	.156	2.67	.50	1.80	.43
-6	-6	3/8	9/16-18	.688		.333	.375	.435	.260	3.03	.56	2.18	.50
-8	-8	1/2	3/4-16	.9		40	.375	.422	.570	.380	3.56	.75	2.43	.62
-10	-8	1/2	7/8-14			1.20	.461	.500	.680	.380	3.78	.87	2.57	.75
-12	-12	3/4	1-1/16		.38	1.59	.469	.562	.850	.600	4.28	1.06	3.73	.87

(A) CANCELLED AFTER 25 OCTOBER 1978 for future procurement use MIL-F-52525/8

REVIEW ACTIVITIES:
USER ACTIVITIES MU, WC, 82

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

APPROVED 23 DECEMBER 1970 (A) 25 October 1978

P.A. ARMY-ME Other Cust	TITLE COUPLING, HOSE; FIELD ATTACHABLE (REUSEABLE), HYDRAULIC, SCREW-ON, PRESSURE TYPE, FEMALE SWIVEL, 37° FLARE, 90° BENT TUBE, LONG DROP, SINGLE WIRE BRAID HOSE.	MILITARY STANDARD MS 39346
PROCUREMENT SPECIFICATIONS MIL-C-52525(ME)	SUPERSEDES:	SHEET 1 OF 3

☆U.S. GOVERNMENT PRINTING OFFICE: 1978—603-022/5312

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:52Z
Check the source to verify that this is the current version before use.