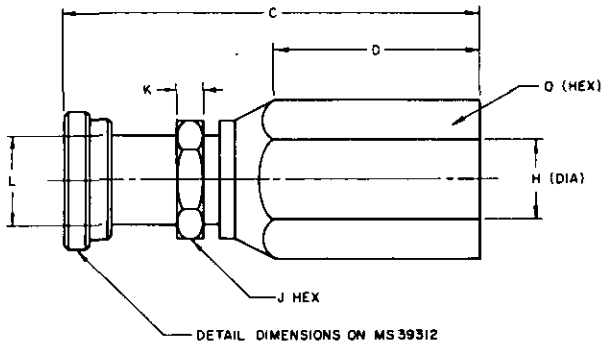

TABLE I. Dimensions for split flange, straight, adapters.

Size (Nominal)	Flange head Dash No.	Hose Dash No.	Hose O.D. Ref.	C Max.	D Min.	L Min.	O Max.
1-1/4	-20	-20	1-1/4	6.03		00	2.25
1-1/4	-24	-20	1-1/4	6		00	2.25
1-1/2	-24	-24	1-1/2			3	2.63

CANCELLED AFTER 10 Nov 83
NO SUPERSEDING STANDARD.

NOTES:
1. Material shall b ...ble iron.
2. The adapters sha ...ated in accordance with QQ-Z-325, Type II, Class 2, or cadmium plated in accordance with Q ...6, Class 3, Type II, except the embrittlement check need not be run.
3. Threads shall be in accordance with NBS Handbook H-28, except threads that grip the hose (if used) are optional.
4. All dimensions are in inches.
5. Marking shall include the manufacturer's name or trademark, size of the adapter, and the letter "R-X".
6. Pressures are in pounds per square inch.
7. Proof pressure shall be that pressure which is equal to twice the maximum working pressure (working pressure X2).
8. Burst pressure shall be that pressure which is not less than four times the maximum working pressure (working pressure X4).
9. Adapters are for use with four spiral light wire reinforcement hose conforming to MIL-H-52471, Type E.
10. Installation designs shall provide for maximum adapter dimensions specified for size and type.
11. The MS part number consists of the MS sheet number, plus the dash numbers. Example: MS -20 -20. The MS number indicates a straight adapter with split flange fitting; the -20 indicates 1-1/4 inch nominal termination size (in increments of 1/16 inch); the next -20 indicates hose size 1-1/4 inch.
12. Referenced documents shall be of the issue in effect on date of invitation for bids or request for proposal.
13. For design feature purposes this standard takes precedence over procurement documents referenced herein.

APPROVED 2 NOVEMBER 1976 REVISED (A) 10 Nov 83

User activities:
Army - MU, WC
Air Force - 99

Review activities:
Army - GL
DSA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A.ME	TITLE	MILITARY STANDARD
Other Cust	Adapter, straight, flange to hose, field attachable (reusable), hydraulic, pressure type, screw-on, 4-bolt split flange, four spiral light wire reinforcement hose	MS 39353
PROCUREMENT SPECIFICATIONS: MIL-A-52525	SUPERSEDES:	Page 1 of 1

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:52Z
Check the source to verify that this is the current version before use.