FED. SUP CLASS
4730

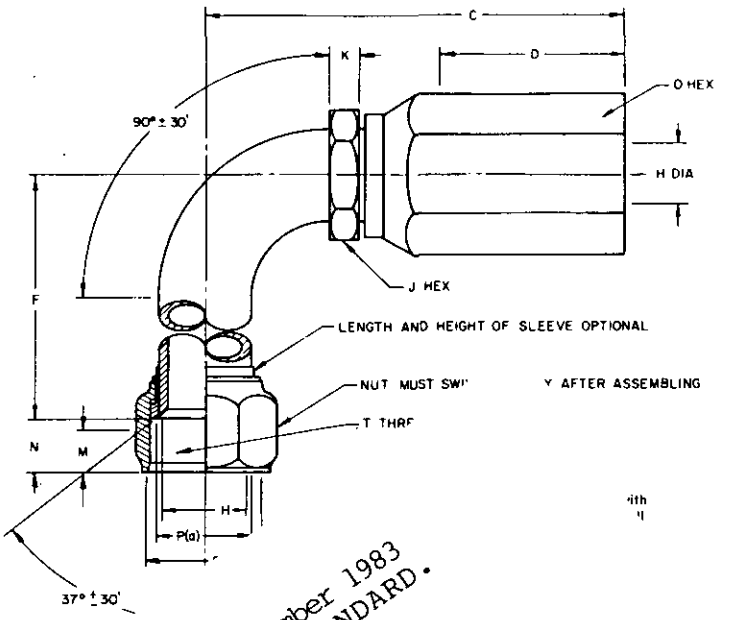

CANCELLED 6 December 1983
NO SUPERSEDING STANDARD.

end, long drop elbows.

(N		Max.	K Min.	M Min.	N Min.	O Max.	P Dia.	S Dia.	T CL-2B
1-.	1.00	2.00	0.41	0.56	0.64	2.25	1.41	1.53	1-5/8 -20
1-1/.	1.19	1.23	2.25	0.41	0.66	0.77	2.63	1.63	1.78	1-7/8 -20

TABLE II. Maximum working pressure of elbows.

Hose O.D. Ref	1-1/4	1-1/2
Pressure	3000	2500

User activities:
Army - MU, WC
Air Force - 99

Review activities:
Army - GL
DSA - CS

APPROVED 4 NOVEMBER 1976 REVISED (A) 6 December 1983

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A.ME
Other Cust

TITLE Elbow, tube to hose, field attachable(reusable) hydraulic, screw-on, pressure type, female swivel, 37° flare, 90°bend, long drop, four spiral light wire reinforcement hose

MILITARY STANDARD
MS 39360

PROCUREMENT SPECIFICATIONS
MIL-A-52525

SUPERSEDES:

DD FORM 1 SEP 57 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-0476

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:52Z
Check the source to verify that this is the current version before use.