A-A-2093A
March 1, 1984
Superseding
A-A-2093
August 10, 1982

COMMERCIAL ITEM DESCRIPTION

# DESK ATTACHMENTS, "L" RETURN CONTEMPORARY STYLE

The General Services Administration has authorized the use of this Commercial Item Description in preference to Interim Federal Specification AA-D-001923.

Salient Characteristics:
These characteristics concisely describe the essential physical and functional/performance features of the commercially available items.

Design. The desk attachment "L" return shall be contemporary style intended for heavy duty office use. The attachments shall be designed to be used with single-pedestal contemporary desks for creating clerical or secretarial work stations.

Types, Classes, Styles and Sizes

Type I. Clerical Height
- Class 1 - One storage drawer in top position and one file drawer in bottom position.
  - Style A - Right-hand attachment
  - Style B - Left-hand attachment
    - Size 1 - 38"L x 18"D x 28-1/2"H, minimum (Fig-1)
- Class 2 - Panel end (no pedestal)
  - Style A - Right-hand attachment
  - Style B - Left-hand attachment
    - Size 1 - 38"L x 18"D x 28-1/2"H, minimum (Fig-2)

Type II - Secretarial Height
- Class 1 - One half height storage drawer in top position and one file drawer in bottom position.
  - Style A - Right-hand attachment
  - Style B - Left-hand attachment
    - Size 2 - 38"L x 18"D x 26"H, minimum (Fig-3)
- Class 2 - Panel end (no pedestal)
  - Style A - Right-hand attachment
  - Style B - Left-hand attachment
    - Size 2 - 38"L x 18"D x 26"H, minimum (Fig-4)

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

Class 3 - Stationery pedestal
Style A - Right-hand attachment
Style B - Left-hand attachment
Size 2 - 38"L x 18"D x 26"H, minimum
(Fig-5)

NOTE: Minimum height shall be measured with glides fully retracted into legs.

General construction: The joining of all the components of the commodities covered by this CID shall result in compact units of sufficient strength to prevent distortion, breakage or loosening of any component during handling, shipping, daily usage and when moved within the office. All units shall comply with the specified test requirements, and shall be capable of intermembering using the specified attachment bracket.

Laminated plastic top. The L-return shall have a particleboard top with self-edged high pressure laminate plastic face and a backing sheet to produce a balanced sandwich construction. The simulated walnut grain laminated plastic tops shall be per GSA Standard Sample No. FSS-L-01002. Alternatively, the manufacturer may provide his equivalent commercial walnut grain laminated plastic, subject to contracting officer approval. Overall thickness of the top shall be one inch minimum.

Legs. Two-1 inch square minimum full height legs shall be reinforced as necesssary to withstand all applicable tests. All exterior surfaces of both legs shall be polished finished stainless or polished chrome plated steel. The legs shall be equipped with adjustable leveling glides.

Pedestal. The overall size of the drawer pedestal shall be of such dimensions as to properly contain the kind, size and location of the drawers specified. The pedestal walls shall be not less than 22 gage steel with corners constructed to eliminate rough metal edges. There shall be an end filler panel to be placed between pedestal legs to create a flush profile.

Drawers. The drawers shall have stops to prevent accidental removal, but allow removal without the use of tools. The minimum inside clear dimensions shall be as shown in Fig. 5. File, half-height and storage drawers shall be welded construction with double wall drawer fronts. The storage drawer body shall be constructed to accomodate partitions. Each storage drawer shall have a minimum of two (2) partitions per drawer. The storage and half-height drawers shall be suspended on nylon glides. The glides shall promote smooth quiet operation and prevent metal-to-metal contact between suspension members. The file drawers shall be on full progressive suspensions. The file drawer shall have a spring activated follower block which operates smoothly. Bumpers shall cushion drawer stops in both closed and extended positions. All storage drawer fronts and file drawer fronts shall extend from the leg to the knee-space side of the pedestal, with the knee-space side of the drawer fornt overlapping the side of the pedestal and positioned in the same plane as the knee-space side of the pedestal. (Necessary clearance shall be allowed between legs and drawer fronts.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

Pulls (drawers). The drawer pulls shall be recessed. The finish shall be polished chrome plate on steel or die cast zinc, or polished anodized aluminum.

Secretarial insert. The front of the stationary rack shall be designed to facilitate access. When the slide-out stationery rack design is used, it shall have a latching device to prevent unintentional removal.

Attachment bracket. Each L-return shall be furnished with a bracket complying with Figure 6, and two 1/4-20 x 3/4" low profile slotted head machine screws with nuts and lock washers.

Finish. Baked enamel with Fed. Std. No. 595 - black (27040) or parchment with the range delimited by (26586) and (26405). Alternatively, the manufacturer may provide his equivalent commercial black and parchment baked enamel finish subject to contracting officer approval.

Identification label. The label shall have the contractor's name or trademark, contract number, NSN (if specified), year and month of manufacture legibly marked in dark ink. The label shall be located on the inside of the knee space near the top and back of the pedestal or panel end. The label shall not be removable by hand without defacement after being affixed for 4 hours.

Workmanship. The workmanship shall be of the quality to produce finished L-returns acceptable in appearance, function and serviceability and prevent potential hazard to personnel or their clothing.

Performance. Each L-return shall comply with the following requirements. Failure to comply with these requirements shall be cause for rejection.

BIFMA L-returns shall comply with the requirements of BIFMA Voluntary Desk Standard D-1-1981, with the following exceptions: The Lock Test, Desk Stability Test, and the Table Stability Test (Sections 6, 13, and 14) are not applicable to this item. Testing in accordance with Sections 4 and 5 shall be conducted with the L-return attached to a Type I, Size 1 desk in accordance with CID A-A-2095, using the brackets described in A-A-2095 and herein.

10.3 - Line 3, after "legs" insert "pedestals
10.3 - After "damage" insert "or any damage"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

Chromium plating test. Plated samples shall be tested for corrosion in accordance with the 5 percent neutral salt spray at 95 degrees F in accordance with ASTM Test Method B-117. Test period shall be not less than 48 hours. After the specified exposure is completed, the specimen shall be visually examined to assure that the plating shows no evidence of peel, chip, uneven color, powder film, pits or stain. Widely scattered spots of corrosion are permitted, however, none of these spots shall exceed 1/16" along the greatest dimension.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered material in accordance with Public Law 94-580 to the maximum extent practicable.

Packaging, packing, marking. Packaging, packing and marking shall be in accordance with the contract or order.

Plastic laminate. A sample of the decorative plastic laminate is obtainable from the Engineering Division, Furniture Commodity Center, General Services Administration, Washington, DC 20406.

Standard Color. A sample of the specified enamel color is obtainable from the Business Service Center, Federal Supply Service, General Services Administration, Washington, DC 20407, or from the Business Service Center in the nearest General Services Administration Regional Office.

BIFMA. The BIFMA Voluntary Desk Standard is obtainable from the Business and Institutional Furniture Manufacturer's Association, 2335 Burton S.E., Grand Rapids, MI 49506.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

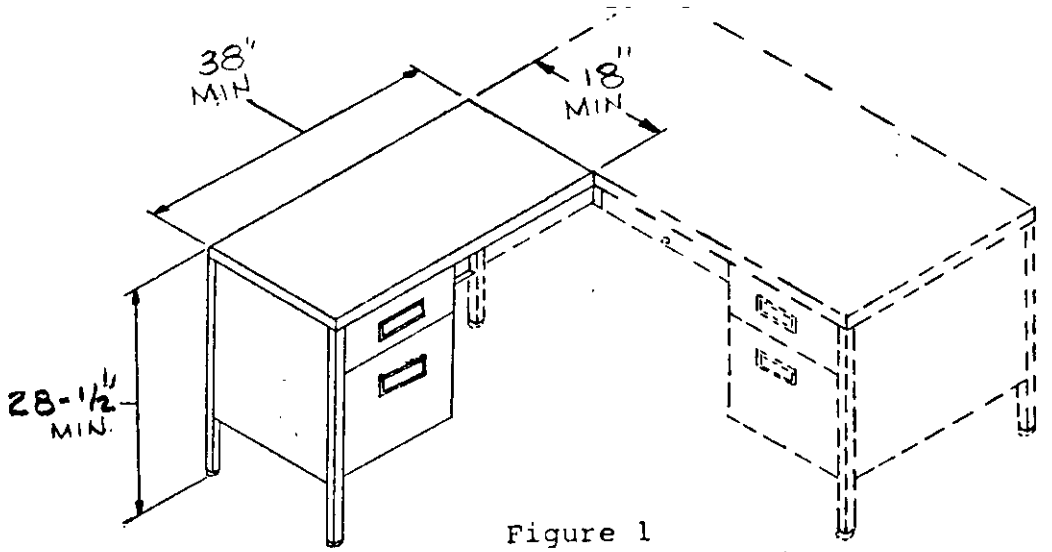



Figure 1
Type I, Class 1 Desk Attachment
("L" Return Unit)

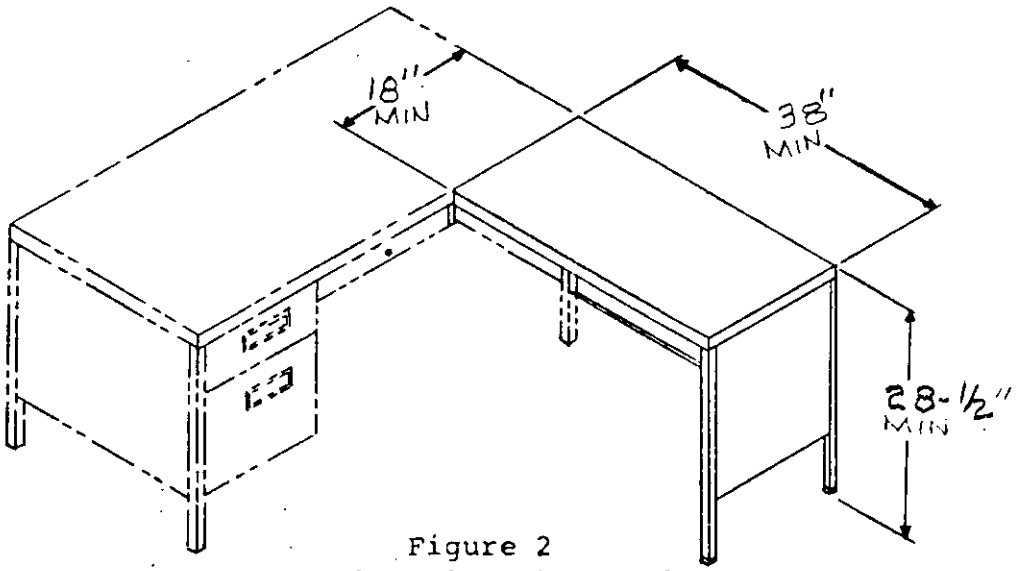



Figure 2
Type I, Class 2 Desk Attachment.
("L" Return Platform)

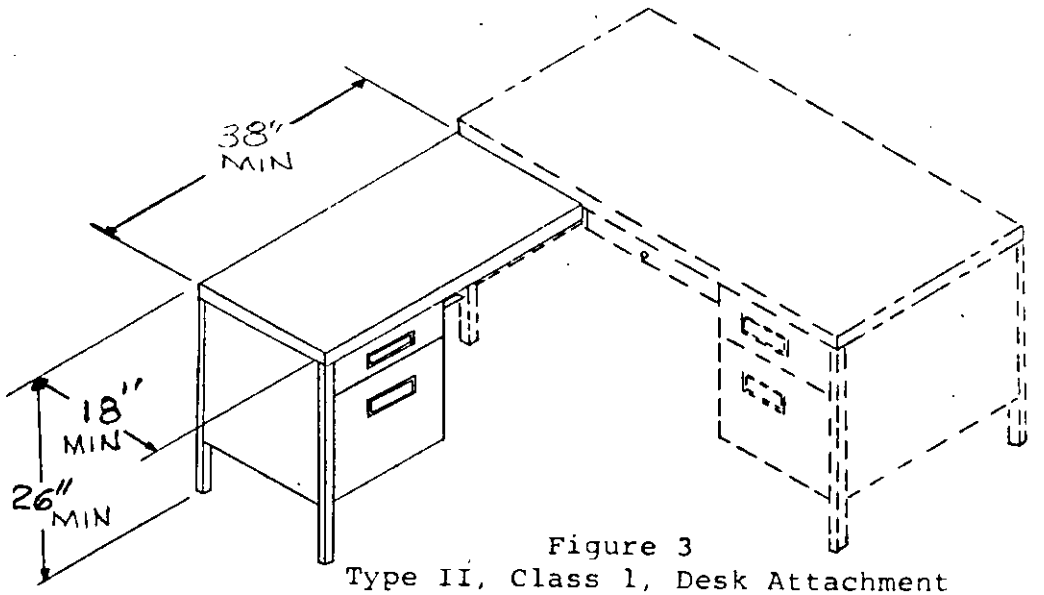



Figure 3
Type II, Class 1, Desk Attachment
("L" Return Unit)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

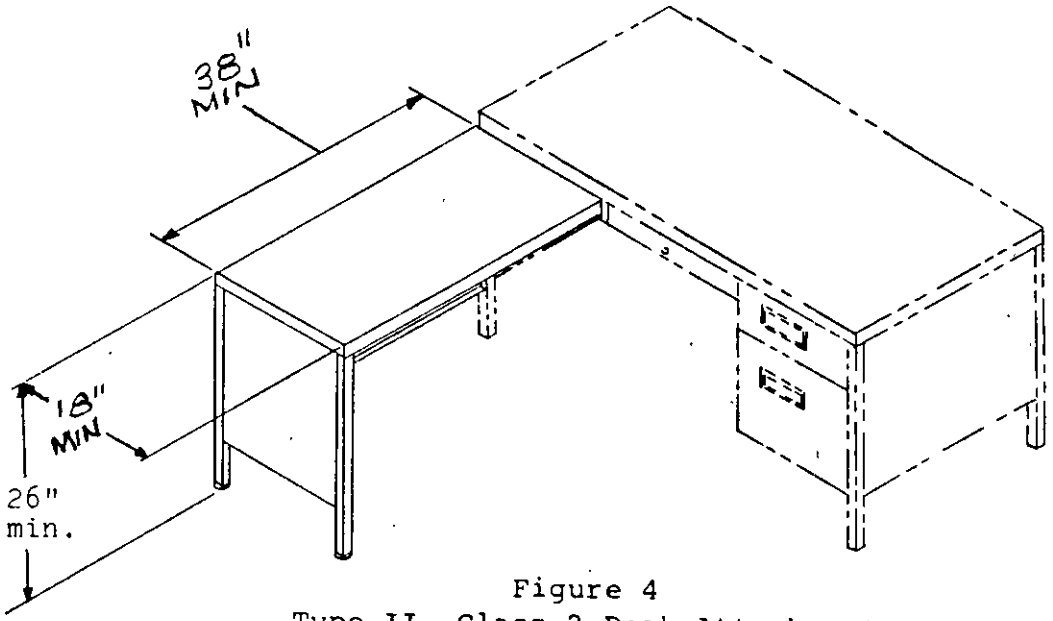



Figure 4
Type II, Class 2 Desk Attachment
("L" Return Platform)

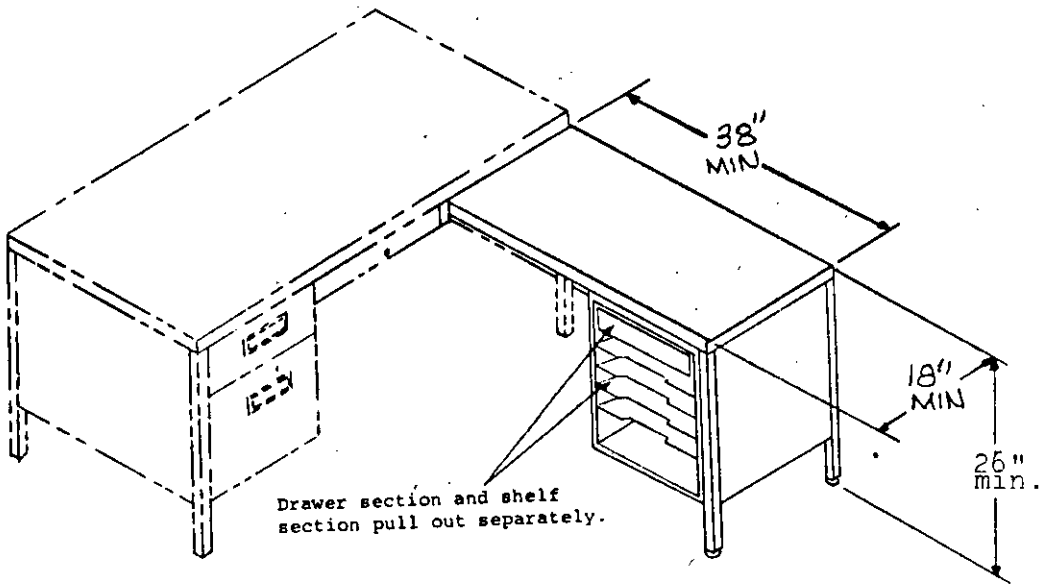



Figure 5
Type II, Class 3 Desk Attachment
("L" Return Unit

Pedestal Drawers:

Minimum inside Clear Dimensions
Storage Drawer- 12" W, 4-7/8"H, 14-1/2" D
File Drawer- 12" W, 10-1/2" H, 14-1/2" D
HALF-HEIGHT STORAGE DRAWERS 12"W, 2"H, 14-½ D

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.