A-A-2936A
April 24, 2002
SUPERSEDING
A-A-2936
November 27, 1995

COMMERCIAL ITEM DESCRIPTION

REAMER, HAND, BURRING, PIPE

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description covers pipe burring hand reamers used in removing burrs from the inside edges of pipes, for countersinking, and for enlarging holes in sheet metals.

2. CLASSIFICATION.


Type I – Ratchet type
Type II – Bit brace shank

3. SALIENT CHARACTERISTICS.

3.1 Type I

Type I hand reamer shall consist essentially of a lever, handle, ratchet mechanism and reamer. Except for the lever, the complete unit shall be made of carbon steel. The Type I reamers shall be similar to Figure 1 and shall conform to Table 1.

Figure 1

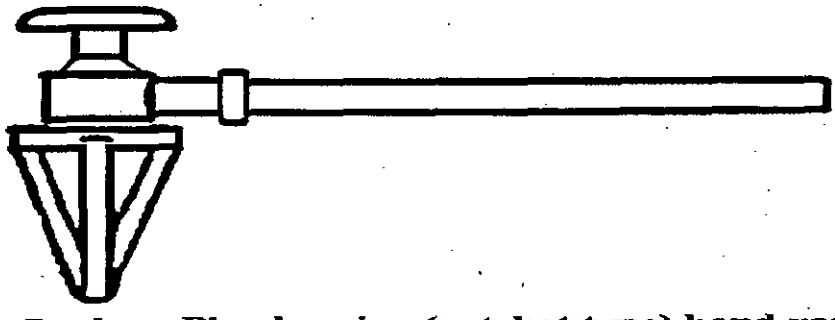

Type I: **Pipe burring (ratchet type) hand reamer**

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Hardware SuperStore (6FEE), 1500 E. Bannister Rd Bldg. #6, Kansas City, Missouri 64131.

FSC 5110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

3.1.1 Lever. The lever shall be made of cast iron or steel, shall be solid or hollow, and shall afford a comfortable grip for the operator. The lever shall be made integral with the ratchet color and shall be provided with a means for being securely fastened to the ratchet collar.

3.1.2 Ratchet mechanism. The ratchet mechanism shall consist of a body with ratchet teeth, a pawl of steel hardened and held in contact with the teeth, and ratchet collar. The teeth shall be enclosed within the ratchet collar. The reamer shall operate in a clockwise direction.

3.1.3 Handle. A suitable handle shall be provided, directly in line with the reamer, to enable the operator to support and guide the reamer during operation. The handle shall rotate about the ratchet body and reamer, and shall be attached in a manner to preclude its working loose while in use.

3.1.4 Reamer. The reamer shall consist either of a body fitted with three or more hardened and ground blades.. The reamer shall be hardened and tempered to a Rockwell hardness value from C54 to C58 when tested per ASTM E18.


Table 1

Pipe Capacity	Distance From Centerline Of reamer To End Of Lever	Weight (Complete Unit Including Reamer)
Inches	Min. Inches	Maximum Pounds
1/8" to 2"	10	7-3/4
3/8" to 3"	10	9-1/2

3.2 Type II.

The Type II reamer shall have a bit brace shank and consist of a ground and solid cone body. The flute design shall be either straight or spiral and shall be specified. The Type II reamer shall be made of carbon steel and shall be hardened and tempered to a Rockwell hardness value from C54 to C57 when tested per ASTM E18. The reamer shall taper 20 to 30° (included angle), and shall have a minimum of 8 to a maximum of 12 flutes. The reamer shall be similar to Figure 2 and shall conform to Table 2.

Figure 2

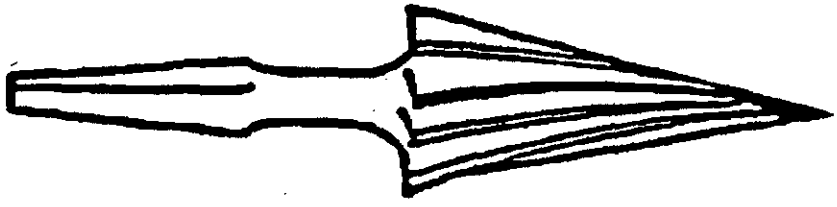

Type II, pipe burring (bit brace shank) hand reamer

Table 2

Pipe Capacity	Diameter At point	Diameter at Large End
Inches	Inches	Inches
1/8 to 1.00	3/16	1-1/4
1/4 to 1-1/4	1/4	1-15/32
1/4 to 2.00	1/4	2-17/64

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:27Z
Check the source to verify that this is the currentversion before use.

3.3 Interchangeability. All part shall be designed and manufactured to definite standards, clearances and tolerances in order that any such parts of particular type or model may be replaced, interchanged and adjusted without modification of the replacement part or any other parts of the unit.

3.4 Identification Marking. The reamer shall be marked with the manufacture's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

4. REGULATORY REQUIREMENTS.

4.1 Recovered Materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch- pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. PRODUCT CONFORMANCE.

5.1 Product Conformance. The product provided shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawing, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Responsibility for Inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any of the inspections deemed necessary to assure the item conforms to the specified requirements.

6. PACKAGING. Preservation, packaging and marking shall be as specified in the contract or order.

7. NOTES. This section contains information of a general or explanatory nature that is not mandatory.

7.1 Source of Documents.

American Society for Testing and Materials (ASTM), PO Box C700, West Conshohocken, PA 19428-2959.

Federal Acquisition Regulation (FAR): Government Printing Office, Superintendent of Documents, Washington DC. 20401-9371.

General Services Administration, Specification Section (3FP-E), Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents.

a. Title, number, and date of Commercial Item Description.
b. Type
c. Pipe Size Range
d. Flute Design, Straight or Spiral.
e. Packaging requirements.

7.3 National Stock Numbers (NSN's). A list of NSN's assigned that correspond to this CID. The list may not be indicative of all possible NSN's associated with the CID.

National Stock Number	Pipe Size Range	Flute Design
	Inches	
5110-00-253-8668	0.125 / 1.00	Spiral
5110-00-222-9040	0.125 / 2.00	Spiral
5110-00-186-4215	0.125 / 2.00	Straight
5110-00-222-8972	0.250 / 1.250	Spiral
5110-00-232-6329	0.250 / 2.00	Spiral
5110-00-221-1322	0.375 / 3.00	Straight

7.4 Key words. Reamer, Hand, Burring, Pipe

MILITARY INTERESTS:
NONE: DoD has no registered interest in revisions and amendments to this Commercial Item Description until further notice.

Preparing Activity:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.