INCH-POUND]
A-A-2938
November 1, 1995
SUPERSEDING
GGG-C-00137B
January 9, 1968

COMMERCIAL ITEM DESCRIPTION

CAPS, VISE JAW

The General Services Administration has authorized the use of this Commercial Item Description for the procurement of all vise jaw caps specified in GGG-C-00137B for all federal agencies.

1. SCOPE

This Commercial Item Description covers vise jaw caps furnished in pairs for protecting the finish of work held in vises having serrated jaw facings. The vise jaw caps convert vises with serrated jaw facings to vises with smooth jaw facings.

2. CLASSIFICATION

Not applicable.

3. SALIENT CHARACTERISTICS

3.1 Material. The vise jaw caps shall be made of copper, brass, or aluminum.

3.2 Construction. The vise jaw caps shall be furnished in pairs. One vise jaw cap shall fit the front jaw of the vise and the other vise jaw cap shall fit the back jaw of the vise. The front vise jaw cap and back vise jaw cap may be identical. Each vise jaw cap shall be constructed of one piece of material. Each vise jaw cap shall be provided with a lug on each end for locating and retaining the vise jaw cap on the vise jaw. Each vise jaw cap shall be provided with two long pliable metal extensions for the purpose of fitting the vise jaw cap to the vise. The pliable portion(s) of each vise jaw cap may be formed to the general shape of the vise. The pliable portion(s) of the vise jaw cap shall not crack or break when the vise jaw cap is fitted to the vise. The vise jaw caps shall be similar to figure 1.

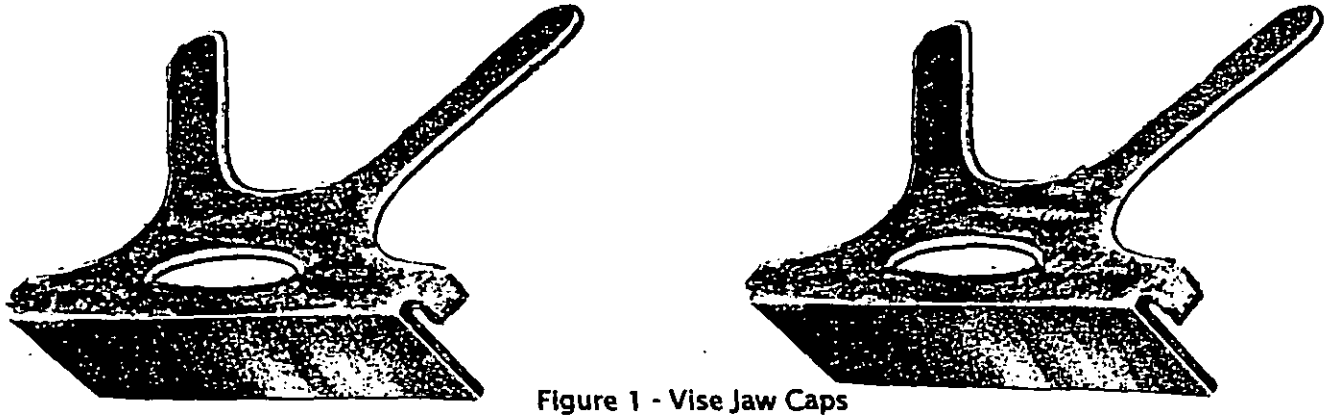


Figure 1 - Vise Jaw Caps

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center (6FETE-C0), Washington, DC 20406

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

3.3 Sizes and dimensions. The vise jaw cap width shall be in accordance with the specified size. The tolerance on the vise jaw cap width shall be plus or minus 1/16 inch. The width between the inside of the two end lugs, when bent as shown in figure 1, shall be not less than 1/16 inch nor more than 3/16 inch greater than the size of the vise jaw cap. The inside height of each end lug shall be 3/8 inch minimum. The pliable extensions shall be of sufficient length to provide for forming the extensions over the sides of the vise, with the aid of a hammer or mallet. The inside height of the vise jaw facing shall be 1 inch minimum. The thickness of the vise jaw cap shall be 0.125 inch minimum and uniform within 1/32 inch. The vise jaw caps shall be one of the following sizes, as specified:

Size 2.	For 2 inch width vise jaws.
Size 2-1/2.	For 2-1/2 inch width vise jaws.
Size 3.	For 3 inch width vise jaws.
Size 3-1/2.	For 3-1/2 inch width vise jaws
Size 4.	For 4 inch width vise jaws.
Size 4-1/2.	For 4-1/2 inch width vise jaws.
Size 5.	For 5 inch width vise jaws.
Size 6.	For 6 inch width vise jaws
Size 8.	For 8 inch width vise jaws

3.4 Identification marking. The vise jaw caps shall be marked with the manufacture's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.5 Workmanship. Details of workmanship shall be in accordance with the best commercial standards and practices. Paints, coatings, platings, and finishes shall be smooth adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g. sharp or rough external edges, corners or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety or appearance.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the Contracting Officer to determine if the product is acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor certification. The contractor shall provide certification and maintain substantiating evidence that all items being offered for acceptance meet the requirements of this Commercial Item Description and conform to the manufacturer's drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any of the inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

6. PACKAGING

Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of reference documents.

Federal Specifications: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC, 20407.

Federal Acquisition Regulations (FAR): Government Printing Office Superintendent of Documents, Washington, DC 20401-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, PO Box 3005, 611 E. Wisconsin Ave., Milwaukee, WI 43201-4606.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:27Z
Check the source to verify that this is the currentversion before use.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and shall include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN.
(c) When applicable, the appropriate size as specified in the Commercial Item Description.
(d) If bid samples are required and the number of samples required.
(e) If first article samples are required and the number of samples required.
(f) If lot sampling is required and the applicable lot sampling requirements.

For example, the following typical lot sampling requirements would be specified in the contract:

Sampling for inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Examinations. Each sample tool shall be tested for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable quality level (AQL) of 2.5 expressed in terms of defects per hundred units.

(g) What preservation, packaging, and marking are required.

7.3 National Stock Numbers (NSNs). The following NSNs are associated with this Commercial Item Description (CID). This list may not be indicative of all possible NSNs associated with this CID:

	Size
NSN 5120-00-XXX-XXXX	2
NSN 5120-00-246-4746	2-1/2
NSN 5120-00-246-4747	3
NSN 5120-00-XXX-XXXX	3-1/2
NSN 5120-00-221-1506	4
NSN 5120-00-293-1231	4-1/2
NSN 5120-00-XXX-XXXX	5
NSN 5120-00-XXX-XXXX	6
NSN 5120-00-XXX-XXXX	8

Military Interests:
None: DoD has no registered interest in revisions and notices to this Commercial Item Description until further notice.

Preparing Activity
GSA - FSS

Source: https://assist.dla.mil Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.