[INCH-POUND]
A-A-2967
August 14, 1996
SUPERSEDING
MIL-P-2001D
August 12, 1964

COMMERCIAL ITEM DESCRIPTION

PUNCH, CUTTING, REVOLVING HEAD

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for MIL-P-2001 for all federal agencies.

1. SCOPE

1.1 Scope. This Commercial Item Description covers a plier-like punch with six, different size, removable or nonremovable cutting tubes assembled on a revolving head for hand punching holes in leather.

2. CLASSIFICATION

2.1 Classification. Not applicable.

3. SALIENT CHARACTERISTICS

3.1 Material. The material shall be as specified herein. Material not specified shall be of a composition and quality meeting the requirements specified.

3.2 Design. The punch shall consist of jaws, a revolving head, index spring, anvil, handles, and six removable or nonremovable cutting tubes (see figure 1). The punch shall be designed to brace the revolving head firmly in the upper jaw and the anvil in the lower jaw. A stop shall be provided to preclude the handles spreading beyond 5 inches when measured 3-3/4 inches from the fulcrum rivet. The punch shall show no sign of permanent set when the punch is in a closed position with the cutting edge of the cutting tube resting against the face of the anvil, and a force of 125 pounds exerted on the handle, perpendicular to the vertical axis of the fulcrum, 3-3/4 inches from the center of the fulcrum rivet. The punch shall be 8 inches $\pm$ 1 inch in length.

3.3 Illustration. Except for the technical requirements (e.g. design), the illustration herein is descriptive and is not intended to preclude the purchase of items otherwise conforming to the requirements of this description.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center, Kansas City, MO 64131.

FSC 5110

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:28Z
Check the source to verify that this is the current version before use.

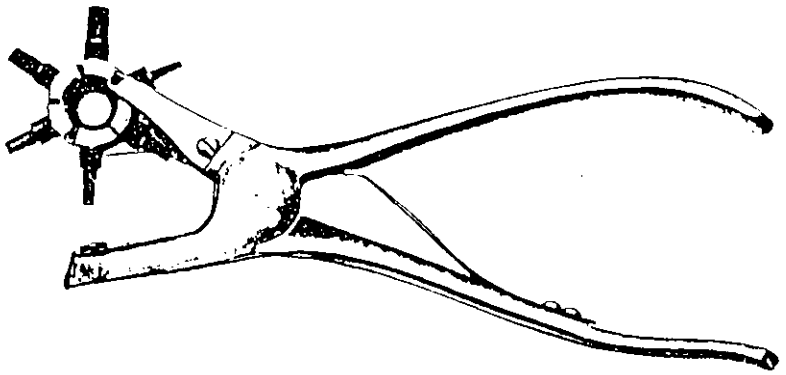


FIGURE 1

3.4. Index spring. An index spring made of spring steel shall be securely fastened to the upper jaw of the handles in a manner that will cause the jaws to remain in an opened position when not under pressure. The index spring shall be tensioned sufficiently to position the head at any of the index stations on the revolving head without play.

3.5 Revolving head. The revolving head shall be fabricated from steel, and shall have six index stations. The revolving head shall rotate and the punch shall operate without the use of undue force. The stations, when aligned by the index spring, shall hold the cutting tubes perpendicular to the center of the face of the anvil and central within 1/32 inch when the punch is in a closed position. The head shall have six through holes equally spaced around its periphery to accept the cutting tubes. The center of the head shall be hollow to allow for discharge of the cutting blanks.

3.6 Anvil. The anvil shall be of soft copper or brass. The anvil shall be properly proportioned with a head having minimum thickness of 1/16 inch, and 3/8 inch $\pm$ 1/16 inch in diameter. The anvil shall be securely attached to the lower jaw.

3.7 Cutting tubes. The cutting tubes shall be fabricated from steel and shall be tightly assembled into the head to prevent removal or loosening during normal usage. The cutting tubes shall be sharpened to a cutting edge capable of cutting clean, smooth holes. The cutting edges shall be free of nicks or rough edges. The cutting tubes shall be through hardened or casehardened. When tested in accordance with ASTM E18, the Rockwell hardness shall be 45 to 55 HRC. The interior surfaces of the cutting tube shall be smooth and free from burrs and pits to allow unobstructed passage of cutting blanks for discharge through the open end of the tube opposite the cutting edge. The inside diameters* (in inches), of the removable or nonremovable cutting tubes shall be as follows:

First Station	0.078	Fourth station	0.125
Second Station	0.094	Fifth station	0.156
Third Station	0.109	Sixth station	0.188

*Tolerance shall be $\pm$0.005 inch except the grip portion of handles.

3.8 Handles. The handles shall be of steel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

3.9 Finish. The punch shall be polished and coated with a rust preventative oil.

3.10 Identification marking. The punch shall be marked with the manufacturer's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.11 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Coatings and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free of manufacturing workmanship defects (e.g., sharp or rough external edges (except for cutting edge), corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, rust, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety and appearance.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications, and quality assurance practices for the highest quality product commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) may be inspected for all salient characteristics by the Government. A failure of any bid sample to meet the salient characteristic shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

6. PACKAGING

6.1 Packaging. Requirements for preservation, packaging, packing, and marking of packages shall be as specified in the contract or order.

7. NOTES (This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Specifications and Standards: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Federal Acquisition Regulation (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, P.O. Box 3005, 611 East Wisconsin Avenue, Milwaukee, WI 43201-4606.

ASTM: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

DoD Standardization Documents: Standardization Documents Order Desk, 700 Robbins Ave., Building 4d, Philadelphia, PA 19111-5094.

7.2 Ordering data. Purchasers should include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN.
(c) If bid samples are required and the number of samples required.
(d) If first article samples are required and the number of samples required.
(e) If lot sampling inspection is required and the applicable lot sampling requirements.

For example:

Sampling for inspection and testing. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

Examinations. Each sample punch shall be examined for all salient characteristics. The Inspection for visual requirements shall be Level II, with an Acceptable Quality Level (AQL) of 2.5 expressed in terms of defects per hundred units. The Inspection for dimensional requirements shall be S-2, AQL of 4.0 expressed in terms of defects per hundred units.

Testing. Each sample punch shall be tested for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable Quality Level (AQL) of 1.5 expressed in terms of defects per hundred units.

(f) What preservation, packaging, and marking are required.

7.3 National Stock Numbers (NSNs). The following NSNs are associated with this Commercial Item Description (CID). This may not be indicative of all possible NSNs associated with this CID.

5110-00-596-9604

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions or notices to this Commercial Item Description until further notice.

Preparing Activity

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.