[INCH-POUND]
A-A-2968
June 27, 1996
SUPERSEDING
GGG-S-0075A
January 4, 1966

COMMERCIAL ITEM DESCRIPTION

SAW SET, HAND

The General Services Administration has authorized the use of this Commercial Item Description for procurement of GGG-S-0075A by all Federal agencies.

1. SCOPE.

1.1 Scope. This Commercial Item Description covers a saw set used for setting teeth on hand, band, panel, and back saws.


2. CLASSIFICATION.

2.1 Classification. Not applicable.


3. SALIENT CHARACTERISTICS.

3.1 Material. The material shall be as specified herein. Material not specified shall be of a composition and quality meeting the requirements specified.

3.2 Design. The saw sets shall have a straight lever grip or pistol grip and constructed that by movement of the operating lever the saw teeth are set when the plunger is caused to move forward and impinge on an anvil located in the head of the tool. The saw sets shall be similar to Figure 1. Component members shall show no evidence of mechanical defect when the saw sets set teeth with a maximum of 0.049 inch thick on three separate saws having 4 to 6, 8 to 10, and 14 points per inch, respectively. The set of each of the teeth shall be uniform and the deflection or bend shall not extend more than one-half the depth of the tooth. Each individual saw set shall set at least ten on each saw to determine compliance with this description.

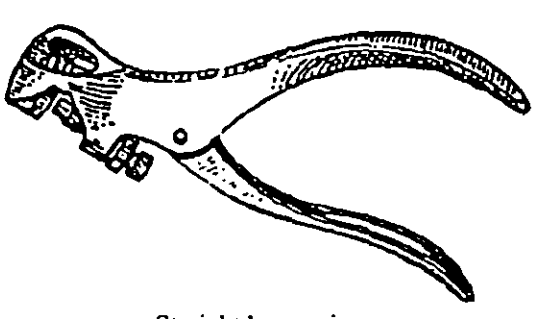

Straight lever grip



Pistol grip

Figure 1. Saw sets, hand.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center (6FETE-CO), Washington, DC 20406.

Distribution Statement A. Approved for public release; distribution is unlimited.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

3.3 Illustrations. The illustrations shown herein are for the convenience of identification and is not intended to preclude the purchase of items otherwise conforming to the requirements of this commercial item description.

3.4 Component parts. The saw set shall be composed of a body, lever handle, anvil, plunger, and gage screw, guide plate or guide plunger.

3.4.1 Body. The body shall be made of steel or malleable iron. The handle portion shall be smooth, knurled, or impressed and so shaped to afford a comfortable handgrip. The head of the body shall be constructed in such a manner that the saw teeth are in plain view to enable the operator to properly adjust the tool to the teeth being set.

3.4.2 Level handle. The lever handle shall be made of steel or malleable iron smoothly finished to afford a comfortable handgrip. The lever handle shall be hinged to the body in such a manner that positive pressure may be applied.

3.4.3 Anvil. The anvil shall be made of tool steel, hardened to a Rockwell hardness of 50 to 60 HRC when tested in accordance with ASTM E18. The anvil shall be adjustable, and the anvil or anvil adjustment shall be graduated and numbered. The minimum graduation range shall be from 4 through 12 teeth per inch. The graduations to be numbered shall be not less than those of the 4, 6, 8, 10 and 12 teeth per inch. The anvil shall be secured to the head of the body and be adjustable in order that the graduated numbers on the anvil may be indexed to correspond with the number of saw teeth per inch. A knurled thumb nut or other means shall be provided for locking the anvil in any position of adjustment.

3.4.4 Plunger. The plunger shall be of tool steel, hardened to a Rockwell hardness of 54 to 60 HRC when tested in accordance with ASTM E18. The tooth contact surface at the end of the plunger shall be smoothly finished to assure a smooth even bend of the saw tooth after each set is made. The end of the plunger, when in normal position, shall be approximately 1/8 inch from the anvil. The plunger shall be capable of setting the cutting edges of the saw teeth having a thickness of 0.049 inch or less. The plunger and mating face of the anvil shall be either parallel or within 4 degrees of being parallel at the point of contact in any adjustable position of the anvil.

3.4.5 Gage screw, guide plate or guide plunger. The gage screw, guide plate or guide plunger shall be of steel and means shall be provided to retain the screw or plate in position when adjusted to the thickness of the saw. When the plunger is used, it shall provide sufficient pressure to guide the saw with each set of the tooth.

3.5 Identification marking. The saw sets shall be marked with the manufacturer's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.6 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g., sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:28Z
Check the source to verify that this is the currentversion before use.

met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications, and quality assurance practices for the highest quality product commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformances prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics by the Government. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

6. PACKAGING.

6.1 Packaging. Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.

7. NOTES.

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Specifications and Standards: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Federal Acquisition Regulations (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371.

ANSI/ASOC Z1.4: American Society for Quality Control, P.O. Box 3005, 611 East Wisconsin Avenue, Milwaukee, WI 43201-4606.

ASTM E18: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

DoD Standardization Documents: Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN(s).
(c) If bid samples are required, the number of samples required, and the subjective inspection requirements.
(d) If first article samples are required and the number of samples required.
(e) If lot sampling inspection is required and the applicable lot sampling requirements.

For example:

Sampling for inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Examinations. Each sample tool shall be examined for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable Quality Level of 4.0, expressed in terms of defects per hundred units.

Testing. Each sample tool shall be tested for all salient characteristics. The Inspection Level shall be S-3 with an Acceptable Quality Level of 1.5, expressed in terms of defects per hundred units.

(f) What preservation, packing, packaging, and marking of packages are required.

7.3 National Stock Numbers (NSNs). The following list of NSNs corresponds to the saw set specified in this CID. This list may not be indicative of all possible NSNs associated with this CID.

NSN

5120-00-244-1167

MILITARY COORDINATING ACTIVITY

Army - GL

Custodians:

Army - GL
Navy - SH
Air Force - 99

Review Activities:

Air Force - 84

PREPARING ACTIVITY:

GSA - FSS

(DoD Project 5120-0073)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.