NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/10D
27 September 1996
SUPERSEDING
MIL-L-11484/10C
14 January 1994

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, LEGION OF MERIT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

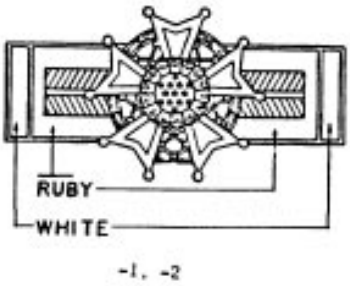

-1, -2



-3

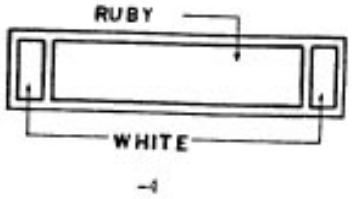

-4

DASH NO.
-1: Legion of Merit, Chief Commander
-2: Legion of Merit, Commander
-3: Legion of Merit, Officer
-4: Legion of Merit, Legionnaire

MATERIAL: Gilding Medal

FINISH:

-1: BAR - Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
DEVICE - Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

-2: BAR - Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
DEVICE - Nickel Plated, Silver Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 12.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:07Z
Check the source to verify that this is the current version before use.

-3: BAR - Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
DEVICE - Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

-4: BAR - Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:

HEIGHT (Overall):		
	-1, -2, -3:	3/8 inch (0.95 cm) (REF)
	-4:	9/64 inch (0.36 cm) (REF)
WIDTH (Overall):		
	-1, -2, -3:	23/32 inch (1.83 cm) (REF)
	-4:	21/32 inch (1.67 cm) (REF)
THICKNESS:		
	BAR:	0.055 inch $\pm$ 0.005 inch (0.140 cm $\pm$ 0.012 cm)
DEVICE (At Center):		0.075 inch $\pm$ 0.005 inch (0.191 cm $\pm$ 0.012 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The device for Dash No. -1, -2 and -3 shall be soft soldered to the bar.

3. Enameled areas shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample.

COLOR	CHIP NO.
Ruby (Transparent Red)	4
White	28

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

5. Attaching device shall be prong with pick and flat ball type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-0858)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:07Z
Check the source to verify that this is the current version before use.