NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/10G
31August 2026
SUPERSEDING
MIL-DTL-11484/10F
1 July 2020

DETAIL SPECIFICATION SHEET


LAPEL BUTTON, LEGION OF MERIT

This specification is approved for use by all
Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

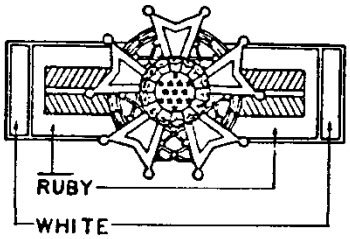

-1, -2



-3

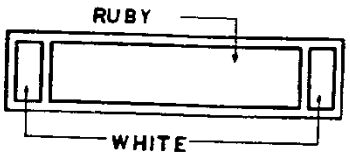

-4

DASH NO.
-1: Legion of Merit, Chief Commander
-2: Legion of Merit, Commander
-3: Legion of Merit, Officer
-4: Legion of Merit, Legionnaire

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1: BAR: Epoxy Resin, (Stoning epoxy) 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.
DEVICE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
-2: BAR: Epoxy Resin, (Stoning epoxy) 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
DEVICE: Nickel Plated, Silver Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 12.
-3: BAR: Epoxy Resin, (Stoning epoxy) 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:07Z
Check the source to verify that this is the current version before use.

DEVICE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
-4: BAR: Epoxy Resin, (Stoning epoxy) 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSION:
HEIGHT (Overall):
-1, -2, -3: 3/8 inch (REF)
-4: 9/64 inch (REF)
WIDTH (Overall):
-1, -2, -3: 23/32 inch (REF)
-4: 21/32 inch (REF)
THICKNESS (At edge):
BAR: 0.055 inch ± 0.005 inch
DEVICE (At center): 0.075 inch ± 0.005 inch

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above and shall match TIOH Hard Epoxy Color Chip Numbers listed below.

TIOH HARD EPOXY COLOR CHIPS	
COLOR	**CHIP NUMBER**
Ruby (Transparent Red)	#4
White	#28

ATTACHING DEVICE:
1. Attaching device shall be prong with pick and flat ball type clutch.

2. The prong shall be centered on the reverse side and either fused or hard soldered to the lapel button.

NOTES:

1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. Hard enamel may be used in lieu of epoxy resin at the option of the manufacturer, if hard enamel is used the material shall be Gilding Metal 95/5 (UNS alloy C-210).

3. The device for -1, -2 and -3 shall be soft soldered to the bar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:07Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC, CG1
DLA - CT

(Project No. 8455-2026-555)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:07Z
Check the source to verify that this is the current version before use.