
MILITARY SPECIFICATION SHEET


CONTACTS, ELECTRICAL CONNECTOR,
PIN, CRIMP REMOVABLE, (FOR
MIL-C-81659 SERIES 2 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense


The complete requirements for procuring the contacts described herein shall consist of this document and the latest issue of Specification MIL-C-39029.

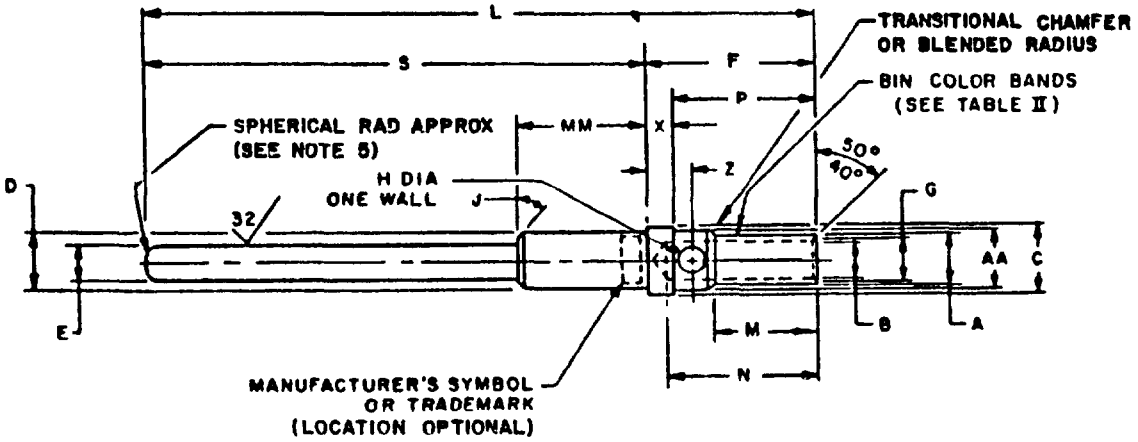

SIZE 12 AND 16 WIRE BARREL



SIZE 22
PIN END



SIZE 20 AND 22
WIRE BARREL

NOTES.
1. Dimensions are in inches.
2 Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3 Metric equivalents are in parentheses for overall length and diameter only.
4 Dimensions shown apply after plating.
5. Spherical end dimensions shall conform to MIL-C-39029

FIGURE 1. Pin contact.

(J) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.

BIN code	A DIA	B DIA	C DIA	D DIA	E DIA	F	G DIA	H DIA	J (DEG)	L (REF)
144	.052	.0375	.070 (1.78)	.050	.031	.271	.047	.022	--	.665 (16.89)
(22-22)	.050	.0340	.068 (1.73)	.047	.029	.260	.041	.018		.645 (16.38)
145	.068	.0460	.084 (2.13)	.072	.041	.199	.058	.033	50	.790 (20.07)
(20-20)	.065	.0430	.082 (2.08)	.069	.039	.184	.052	.025	40	.770 (19.56)
146	.103	.068	.134 (3 40)	.113	.0635	.305	.090	.042	35	1.014 (25.76)
(16-16)	.101	.066	130 (3 30)	.110	.0615	.289	.080	.036	25	.994 (25.25)
147	.151	.102	.190 (4.83)	.151	.095	.305	.140	.042	35	1.017 (25.83)
(12-12)	.148	.098	.186 (4.72)	.148	.093	.289	.130	.036	25	.996 (25.30)

BIN code	M MIN	N	P (REF)	S	X	Z	AA DIA	MM
144	N/A	.165	.237	.394	.034	.161	N/A	105
(22-22)		.135	.231	.385	.029	.132		.095
145	N/A	.190	.165	.591	.034	.069	N/A	146
(20-20)		.150	.155	.586	.029	.054		140
146	.150	.290	.257	.715	.048	.083	.111	.195
(16-16)		.250	.245	.705	.044	.069	.107	.175
147	.150	.290	.257	.715	.048	.083	.158	.195
(12-12)		.250	.245	.705	.044	.069	.155	.180

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.

TABLE II. Design characteristics.

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
144	Brown	Yellow	Yellow	22	22	A	B
145	Brown	Yellow	Green	20	20		
146	Brown	Yellow	Blue	16	16		
147	Brown	Yellow	Violet	12	12		

TABLE III. Tools. (J)

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool
144	M22520/2-01	M22520/2-23	M81969/1-01	M81969/1-01
145	M22520/2-01 M22520/7-01	M22520/2-08 M22520/7-02	M81969/1-02	M81969/1-02
146	M22520/1-01 M22520/7-01	M22520/1-02 Blue M22520/7-03	M81969/1-03	M81969/1-03
147	M22520/1-01	M22520/1-11	---	M81969/28-02

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See figure 1 and tables I and II.

Tools See table III.

(J) Vibration: Method 2005 of MIL-STD-1344, test condition IV.

(J) Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition A.

Mating contact: MIL-C-39029/12.

Low signal level contact resistance: The mating depth shall be 0.150 inch.

Contact strength: The bending moment of M39029/11-144 shall be 0.23 lb-in

QPL evaluating activity. Naval Avionics Center, Code D-914, Indianapolis, Indiana 46218.

International interest: NEPR 57.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.

Military part number See table IV.

(J) TABLE IV. Military part number.

BIN code	Military part number	Supersedes
144	M39029/11-144	M39029/11-22-22
145	M39029/11-145	M39029/11-20-20
146	M39029/11-146	M39029/11-16-16
147	M39029/11-147	M39029/11-12-12

Custodians
Army - CR
Navy - AS
Air Force - 85

Review activities
Army - AR, MI
Navy - EC, SH, MC
Air Force - 11, 17, 99
DLA - LS

User activities
Army -
Navy - OS
Air Force -

Preparing activity
Navy - AS

Agent
DLA - ES

(Project 5935-3097-23)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-C-39029/11J Contact, Electrical Connector, Socket, Crimp Removable

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications & Standards Department
Naval Engineering Standards
Lakehurst, N.J. 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:30Z
Check the source to verify that this is the current version before use.